


4848


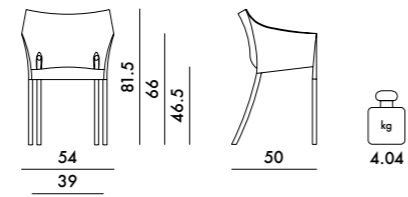


LEGS


Sturdy aluminium

SEAT

Smooth batch-dyed polypropylene



5826

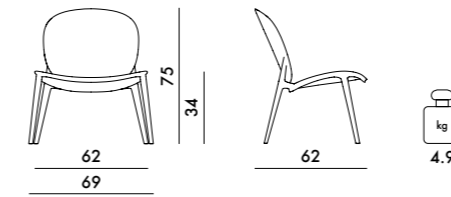


MATERIAL

Mass-dyed modified polypropylene and soft touch treatment




EN 1728:2000	level achieved
6.2.1	(maximum level) 5
6.2.2	(maximum level) 5
6.5	(maximum level) 5
6.6	(maximum level) 5
6.7	(maximum level) 5
6.10	(maximum level) 5
6.12	(maximum level) 5
6.13	(maximum level) 5
6.15	(maximum level) 5
6.16	(maximum level) 5
6.17	(maximum level) 5

4848



2 11.2 0.290 57X57X89

5826



1 8.0 0.344 63X72X76

EN 1022:2005	Compliant
EN 16139:2013	Compliant
EN 1728:2012	Level achieved
6.4	(maximum level) L2
6.5	(maximum level) L2
6.6	(maximum level) L2
6.15	(maximum level) L2
6.16	(maximum level) L1
6.17	(maximum level) L2
6.18	(maximum level) L2
6.24	(maximum level) L2
6.25	(maximum level) L2