


) david
trubridge


planning



Navicula

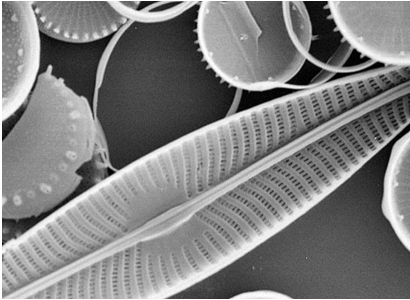

Navicula is derived from nature, in this case from one of the many microscopic diatoms that float around in the worlds oceans. The flowing, segmented form is shipped as flatpack and assembled on site with push-in nylon clips. The thin curved pieces of CNC-cut bamboo plywood create a flowing structure that also casts magical patterns. It is lit from within a row of LED pin-point lights, the light source is aimed upwards to create a soft ambient glow. There are three sizes.

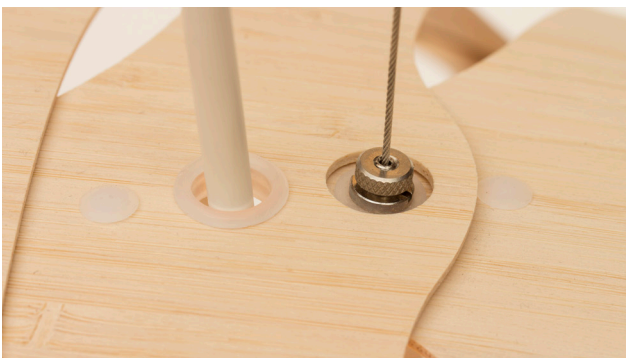

Features

Partially assembled Kitset

Our kitset lightshades are on average 1/30th of the volume of the assembled light. This aims to help minimize the effects of shipping and to reduce the design's environmental footprint.

Care Instructions

All wooden and/or polycarbonate lights are intended for use in dry interior conditions only and can be cleaned with a soft cloth or duster when the light is switched off. Do not use detergents.

Compliance

CE

AS/NZS


(Declarations of conformity available on request).

Warranty




This light is warranted for three years from date of purchase for failure of parts.



5002970
CONFORMS TO :
UL STD 1598
certified to CSA STD
C22.2 No.250.0
Canada / USA

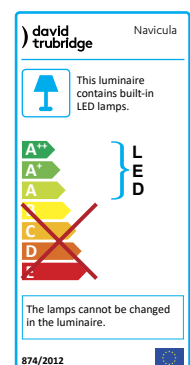

Technical Data



Small

Medium

Large

Width: 570mm / 22" Height: 200mm / 8" Length: 1440mm / 57" Weight: 2kg / 4lb	Width: 900mm / 35" Height: 380mm / 15" Length: 1950mm / 77" Weight: 3kg / 7lb	Width: 1000mm / 39" Height: 450mm / 18" Length: 2500mm / 98" Weight: 6kg /14lb	Dimensions
5m / 16.4ft	5m / 16.4ft	5m / 16.4ft	Cordset
Bamboo plywood (Sourced from FSC accredited factory)	Bamboo plywood (Sourced from FSC accredited factory)	Bamboo plywood (Sourced from FSC accredited factory)	Material
Nylon	Nylon	Nylon	Fasteners
2 x 5m Suspension Wires	2 x 5m Suspension Wires	2 x 5m Suspension Wires	Suspension
(Partially assembled)	(Partially assembled)	(Partially assembled)	Packaging
1130mm x 750mm x 90mm 44"x 30" x 4" 0.076m³ / 2.6839ft³ 6kg / 13.22lb	1130mm x 750mm x 90mm 44"x 30" x 4" 0.076m³ / 2.6839ft³ 7kg / 15.43lb	1280mm x 925mm x 130mm 50"x 36" x 5" 0.154m³ / 5.4384ft³ 13kg / 28.66lb	

Finish Choices



Natural

All bamboo (our primary material) is secondary product, from renewable forests in China grown as a food source. We have visited these plantations and are satisfied with the quality of their systems.




Caramel

Caramel bamboo starts out as natural and is carbonised using steam to caramelise the natural sugars which darken the bamboo. This process creates a different look without using chemicals.



Painted Lights


We use an acrylic low VOC (volatile organic compound) paint that is made in New Zealand. Colour swatches are available in all retailers. See the Resene website for more info.
www.resene.co.nz

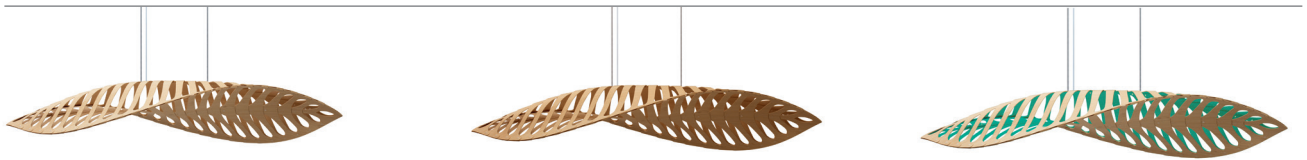

Natural

Caramel


Aqua

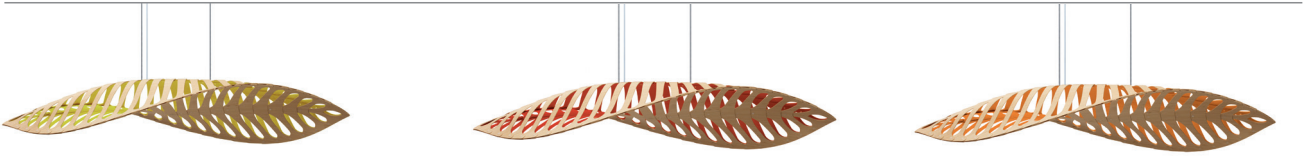

Lime

Red


Orange

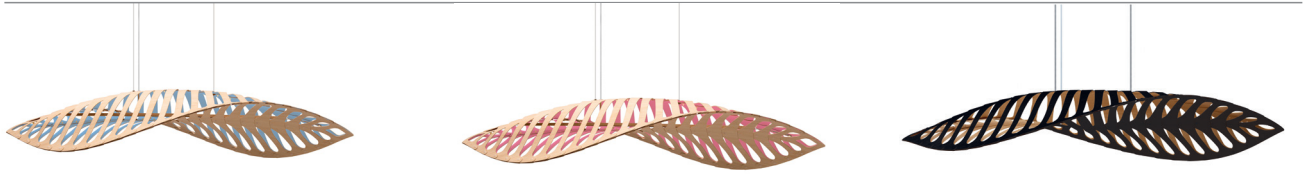

Blue

Pink

Black 1 Side (Outside)

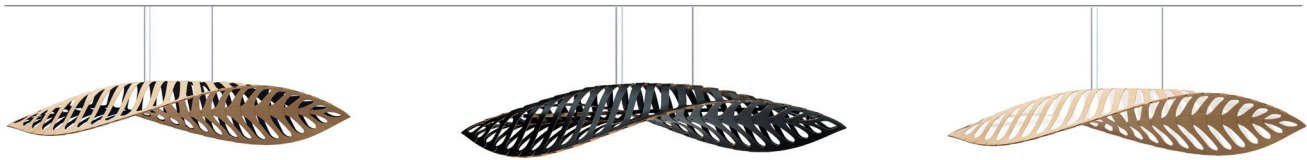

Black 1 Side (Inside)

Black 2 Sides

White 1 Side



White 2 Sides

You will need

Fixings for cone gripper and canopy
(fixing screws NOT SUPPLIED).
Note: Choose appropriate hardware
to attach base plate (Fig.1) to ceiling
substrate.




Fig 1. Base Plate



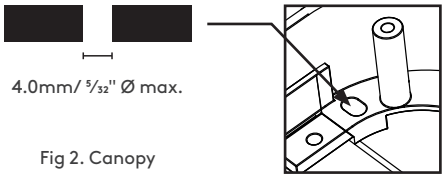



Fig 2. Canopy

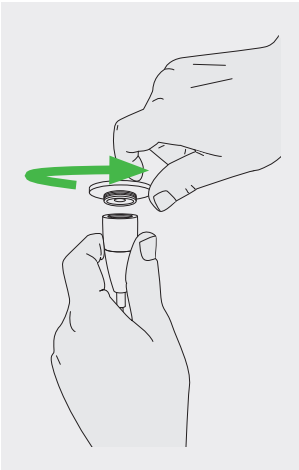



Step 1.
Unscrew baseplate.

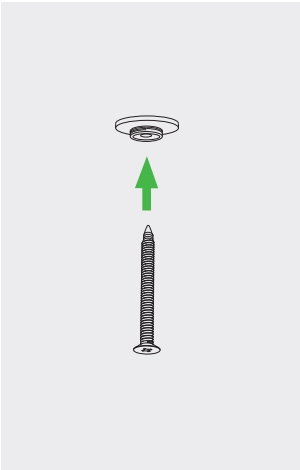

Step 2.
Use appropriate fixing screw to
mount base plate (Fig.1).

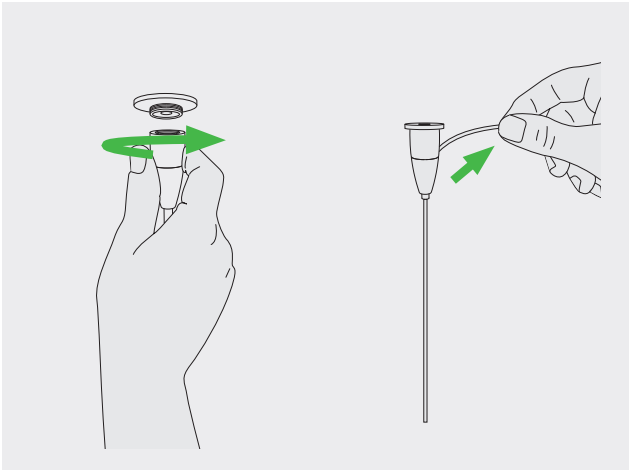

Step 3.
Remove cable from cone. Screw cone back onto baseplate. Re-insert
cable and level light. Once desired position is set, trim excess cable.

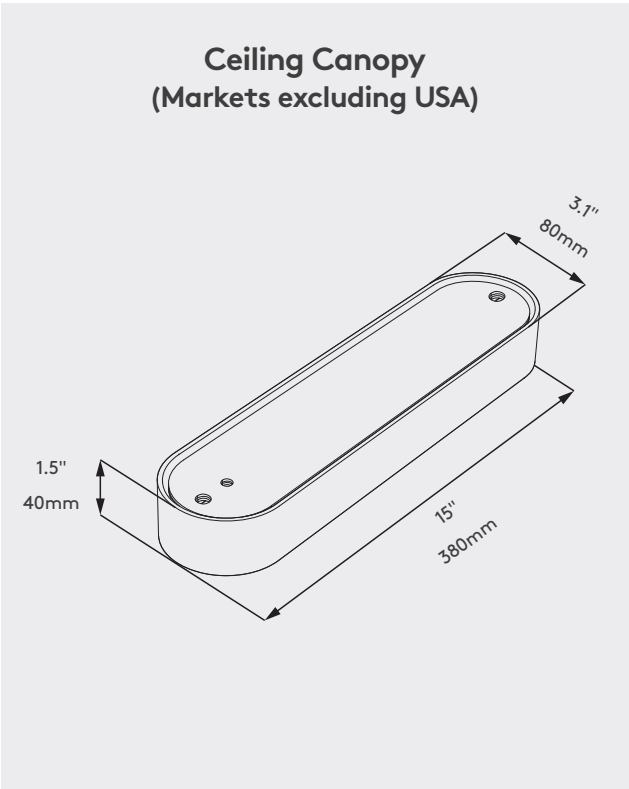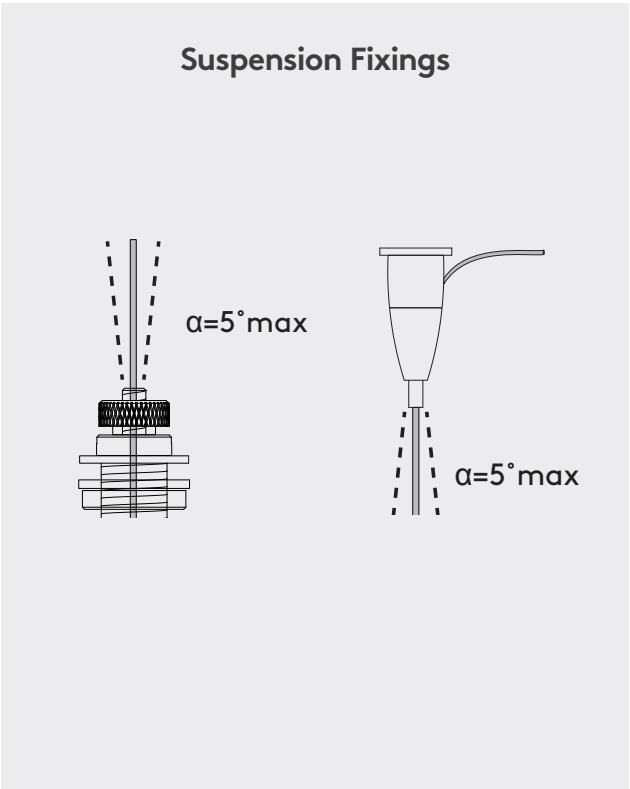

(Fig 2) Canopy

Installation

Driver/Transformer position option 1: Surface mounted ceiling canopy

Small

Electric details (Rest of the world)

LED LIGHT BAR


Warm white LED Strip, 24VDC, 8W
2700K

DRIVER / TRANSFORMER

Tridonic, 220-240VAC, 50/60Hz
* Dimmable

CEILING CANOPY

1kg / 2.2lb

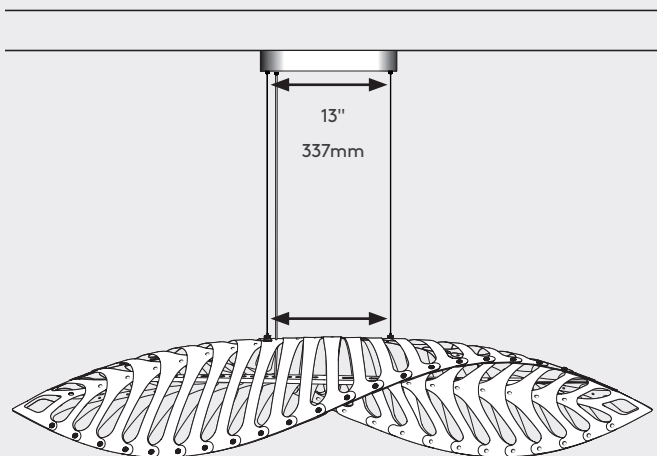

Driver/Transformer position option 2: Remote location (not using canopy)

Small


Electric details (Rest of the world)

LED LIGHT BAR

Warm white LED Strip, 24VDC, 8W
2700K

DRIVER / TRANSFORMER

Tridonic, 220-240VAC, 50/60Hz
* Dimmable

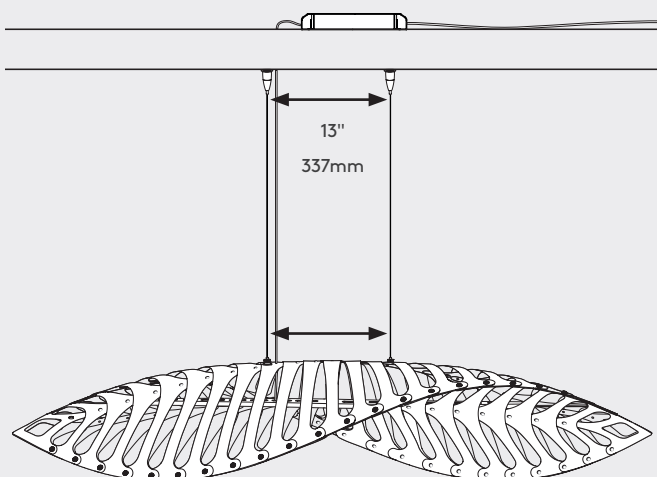


Installation

Navicula naturally hangs at 14 degree difference to alignment of canopy.


Small

a

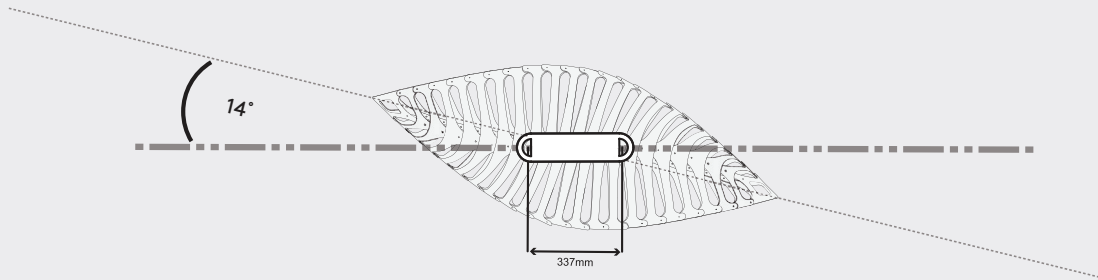

To align canopy to an edge see diagram a.

b

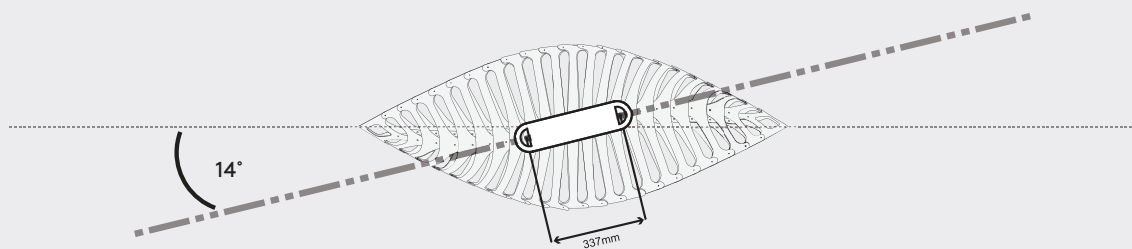

To align Navicula to an edge see diagram b.

All line drawings are not to scale.

Installation

Driver/Transformer position option 1: Surface mounted ceiling canopy


Medium

Electric details (Rest of the world)

LED LIGHT BAR
Warm white LED Strip, 24VDC, 11W
2700K

DRIVER / TRANSFORMER
Tridonic, 220-240VAC, 50/60Hz
* Dimmable

CEILING CANOPY
1kg / 2.2lb

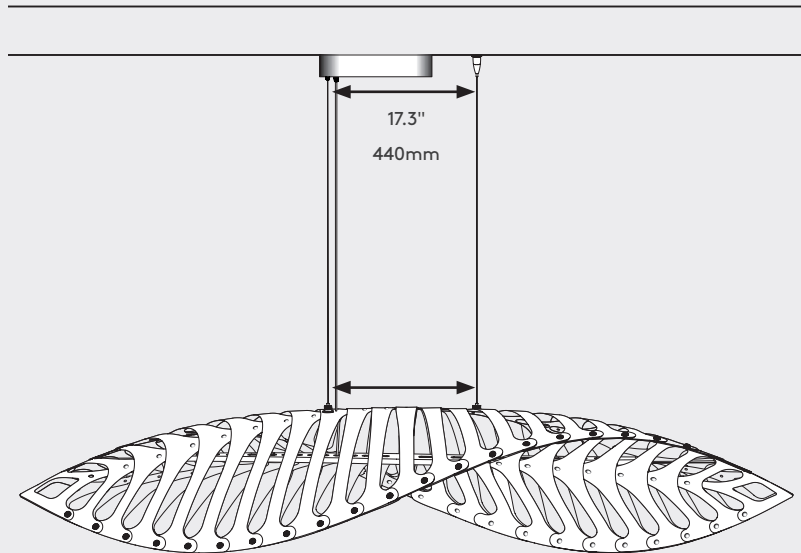


Driver/Transformer position option 2: Remote location (not using canopy)

Medium

Electric details (Rest of the world)

LED LIGHT BAR
Warm white LED Strip, 24VDC, 11W
2700K

DRIVER / TRANSFORMER
Tridonic, 220-240VAC, 50/60Hz
* Dimmable

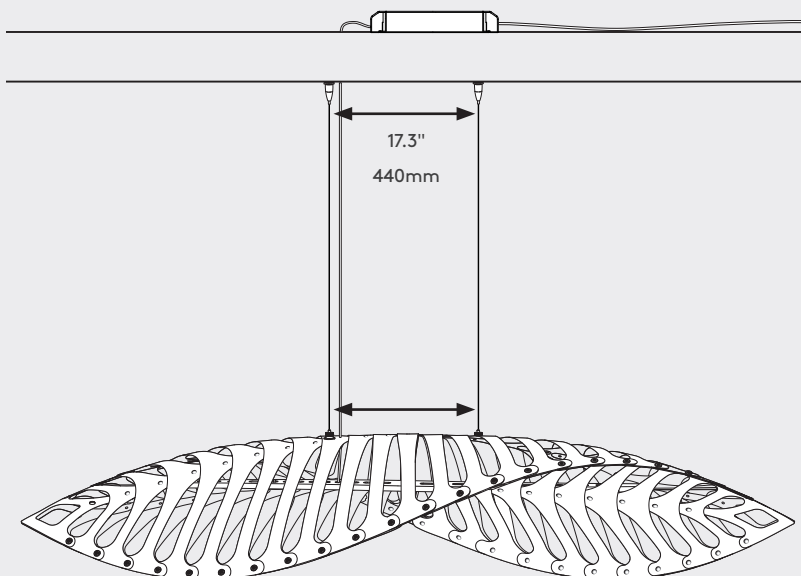


Installation

Navicula naturally hangs at 14 degree difference to alignment of canopy.


Medium

a

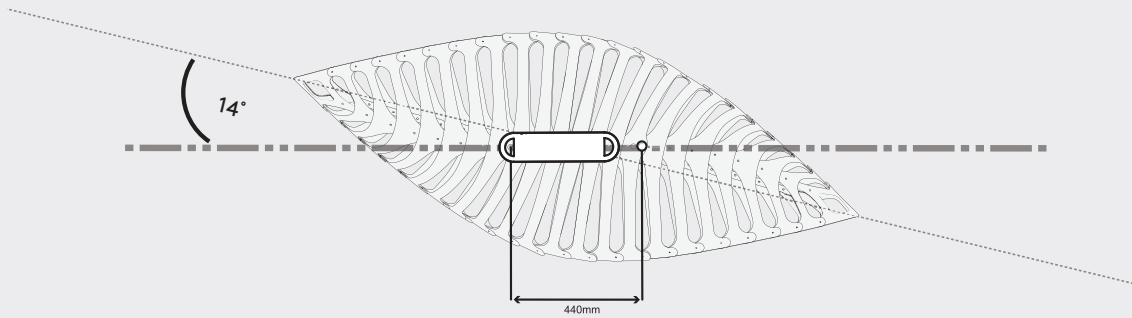

To align canopy to an edge see diagram a.

b

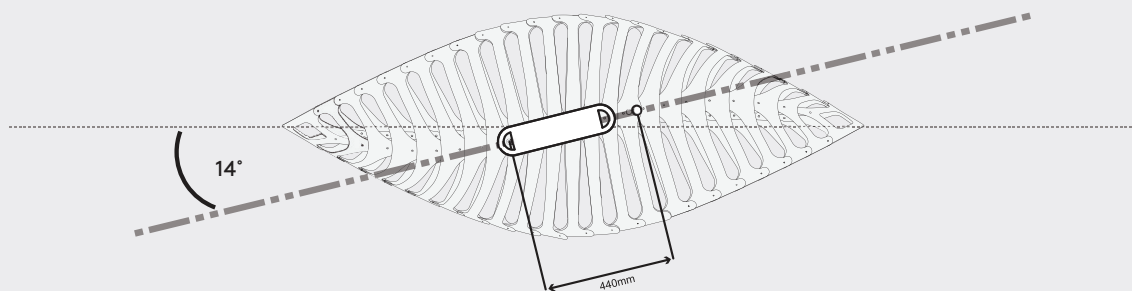

To align Navicula to an edge see diagram b.

Installation

Driver/Transformer position option 1: Surface mounted ceiling canopy


Large

Electric details (Rest of the world)

LED LIGHT BAR
Warm white LED Strip, 24VDC, 18W
2700K

DRIVER / TRANSFORMER
Tridonic, 220-240V, ac 50/60Hz
* Dimmable

CEILING CANOPY
1kg / 2.2lb

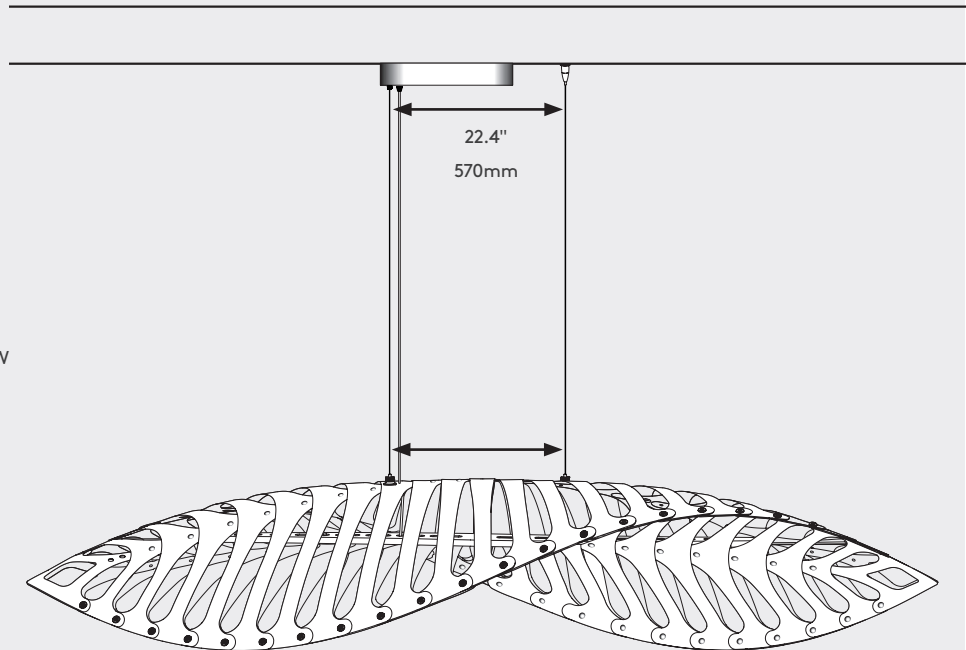


Driver/Transformer position option 2: Remote location (not using canopy)

Large

Electric details (Rest of the world)

LED LIGHT BAR
Warm white LED Strip, 24VDC, 18W
2700K

DRIVER / TRANSFORMER
Tridonic, 220-240V, ac 50/60Hz
* Dimmable

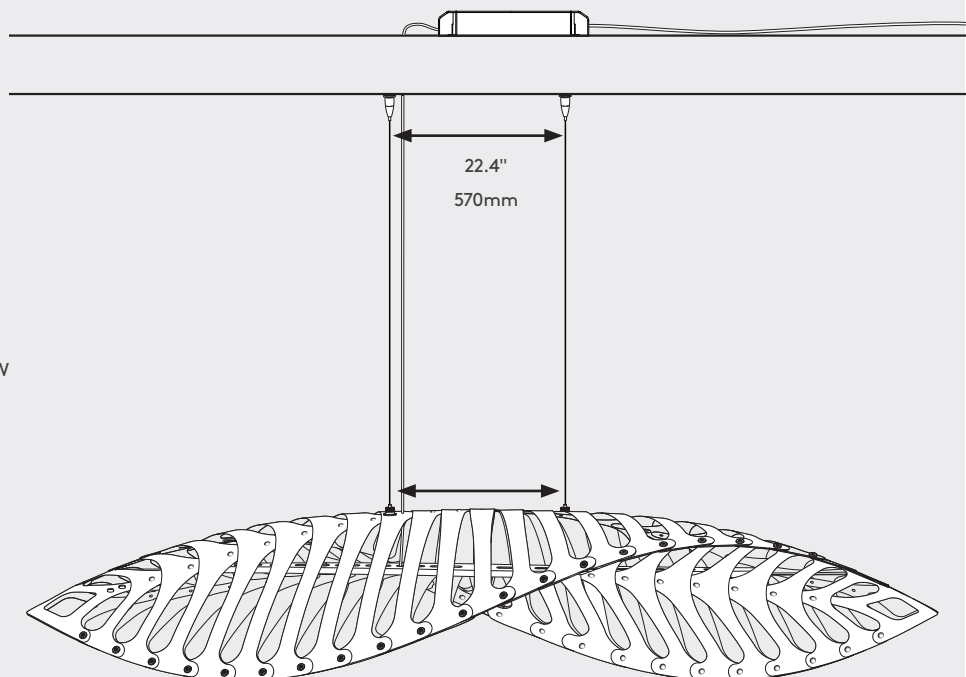


All line drawings are not to scale.

Installation

Navicula naturally hangs at 14 degree difference to alignment of canopy.


Large

a

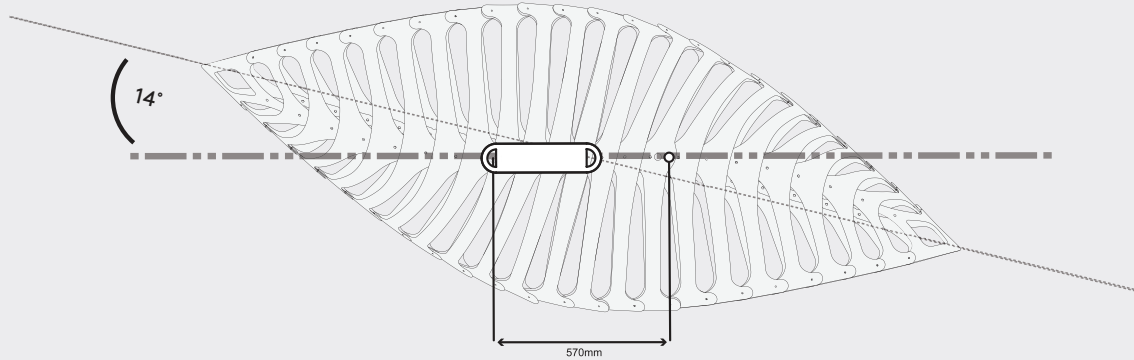

To align canopy to an edge see diagram a.

b

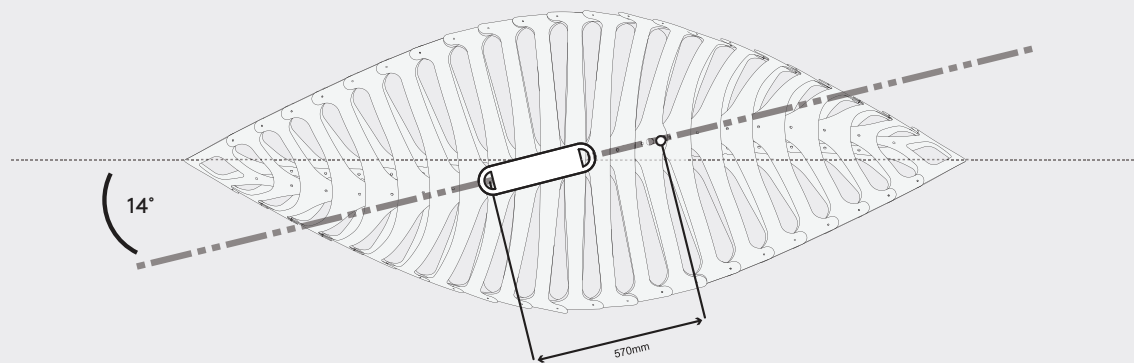

To align Navicula to an edge see diagram b.

All line drawings are not to scale.