


KABUKI 2016

Design Ferruccio Laviani



9180/B9180/U9180/Z9180

dimmable



		IP 20	220-240 120	CLASS E
19W integrated Led	2700°K CRI 80	50.000 h.	2289lm	
26W LED				


MATERIAL

Transparent or mass-dyed thermoplastic technopolymer

TRANSPARENT				OPAQUE		
	B4 Crystal	VE Green	AZ Light blue		O3 White	O9 Black

9185/B9185/U9185

dimmable outdoor version



		IP 44	220-240 120	CLASS E
19W integrated Led	2700°K CRI 80	50.000 h.	2289lm	
26W LED				

MATERIAL

Transparent or mass-dyed thermoplastic technopolymer

TRANSPARENT		OPAQUE			
	B4 Crystal		O3 White	O9 Black	




SPARE PART

91825EU (ver. 9180/B9180)
LED Module


91825US (ver. U9180/Z9180)
LED Module

91855EU (ver. 9185)
LED Module

91855US (ver. U9185)
LED Module





The light source contained in this appliance must only be replaced by qualified personnel using original spare parts.



9180/B/U/Z	1	12.26	0.562	57X173X57
9185/B/U	1	12.26	0.562	57X173X57



9175/9176

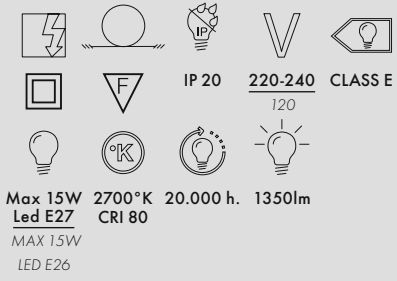

MATERIAL

Transparent or mass-dyed thermoplastic technopolymer

TRANSPARENT



B4
Crystal



VE
Green



AZ
Light blue

OPAQUE



O3
White



O9
Black


JJ14

One E27 max. 12W LED light bulb included
Cannot be sold separately from 9175


One E26 Max 7.5W LED light bulb included
Cannot be sold separately from 9176



Production video



The light source can be replaced with a similar source, respecting the data indicated on the label. We recommend using a light source with a colour temperature of 2700 K.



9175/9176

1

4.0

0.288

60X60X80



MINI KABUKI 2018

Design Ferruccio Laviani



9200/B9200/U9200
dimmable



kg
1.7



MATERIAL

Polycarbonate 2.0 from transparent or mass-dyed renewable raw material

TRANSPARENT



B4
Crystal



AZ
Light blue



VE
Green

OPAQUE



03
White



09
Black



New polycarbonate 2.0, a material that uses a renewable raw material from the pulp and paper industry in the synthesis phase. The process used for the production of the material is ISCC certified* (International Sustainability and Carbon Certification)




100V-240V power supply included



SPARE PART

9202000

Dimmer, LED Module



The light source contained in this appliance must only be replaced by qualified personnel using original spare parts.



9200/B/U

1

2.83

0.11

38X37X84



9200

B9200

U9200