






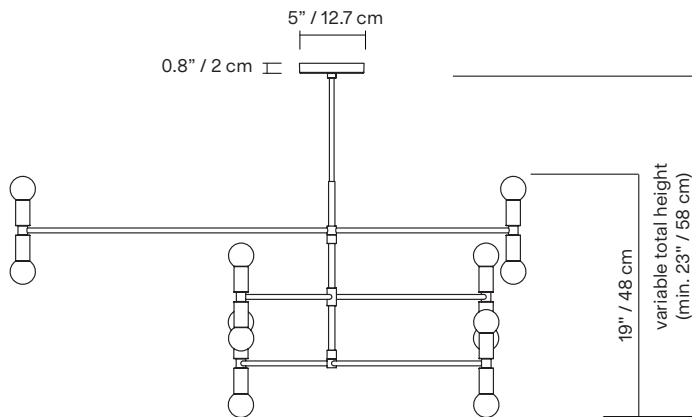
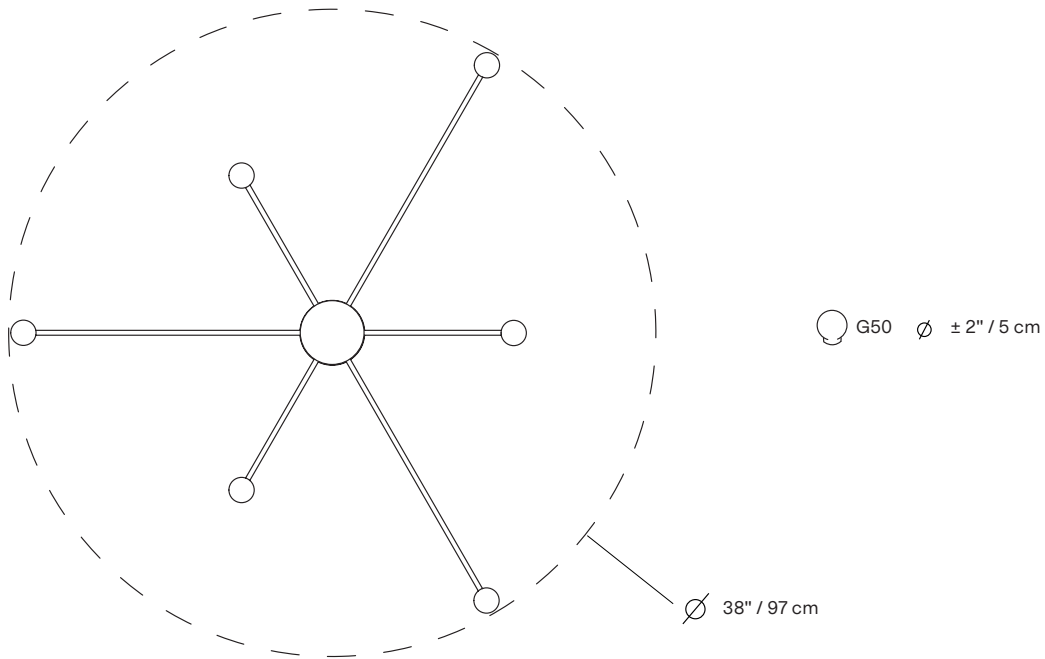
DOT ATOMIUM



The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

TYPE	Pendant
CONSTRUCTION	Brass body Milk glass globes
SPECIFICATIONS	Source: LED lamp provided (G9 base) Power consumption: 12 x 3.5W Lumen output: 3606lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard Expected lifetime: ≥ 25 000h
CONTROL	Refer to our recommended list of dimmer models
TOTAL HEIGHT	A: 24.5" B: 30.5" C: 36.5" D: 42.5" E: 54.5" 62cm 77cm 93cm 108cm 138cm
WEIGHT	Min. 5.5 lb / 2.5 Kg
CERTIFICATIONS	     IP20
WARRANTY	2 years

Spec Drawings



*dimensions are approximate and may vary slightly

FINISH




BR
Brass



GR
Graphite

CANOPY


Swivel option available for slanted ceiling



NOTES

- Must be installed by an electrician
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

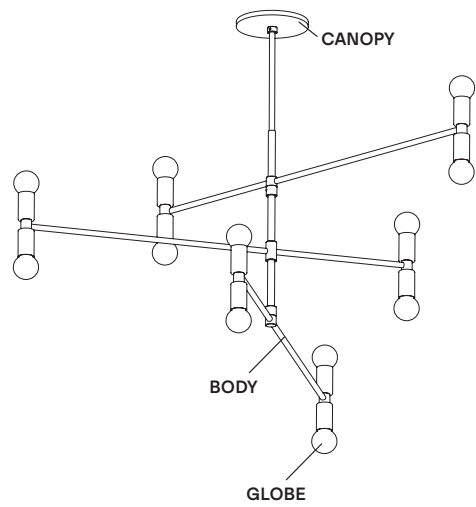

Order Guide: SKU

		Example	Fill with your selection
COLLECTION	DOT Dot	DOT	DOT
MODEL	01	01	01
FINISH	BR Brass GR Graphite	BR	
TOTAL HEIGHT	A 24.5" / 62 cm B 30.5" / 77 cm C 36.5" / 93 cm D 42.5" / 108 cm E 54.5" / 138 cm V Variable	A	
FULL SKU		DOT01BRA	
		NOTES	

Dimmer Specifications

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON - MAESTRO	MAELV-600	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	CTELV-303P	100%	0%	Phase Cut
LUTRON - DIVA	DVELV-300P	100%	0%	Phase Cut
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	Phase Cut

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge**)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
VARILIGHT	V-PRO	100%	2%	Phase Cut
LEGRAND - NILOÉ	3 996 35	87%	15%	Phase Cut
NIKO	310-0280X	94%	5%	Phase Cut
NIKO	310-0190X	100%	1%	Phase Cut

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.






**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.


DOT LINE SUSPENSION



The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

TYPE	Suspension
CONSTRUCTION	Brass or powder coated aluminium body and hardware Milk glass globes Polyester cord
SPECIFICATIONS	Source: LED lamp provided (G9 base) Power consumption: 5x 3.5W Lumen output: 1202lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard * ≥ 90 CRI upon request Expected lifetime: ≥ 25 000h
CONTROL	Refer to our recommended list of dimmer models
CORD LENGTH	96" / 244 cm
CHAIN OR STAINLESS STEEL CABLE LENGTH	90" / 229 cm
WEIGHT	Brass: 4.6 lb / 2.1 kg Powder coated aluminum: 3.8 lbs / 1.8 kg
CERTIFICATIONS	     IP20
WARRANTY	2 years

Spec Drawings

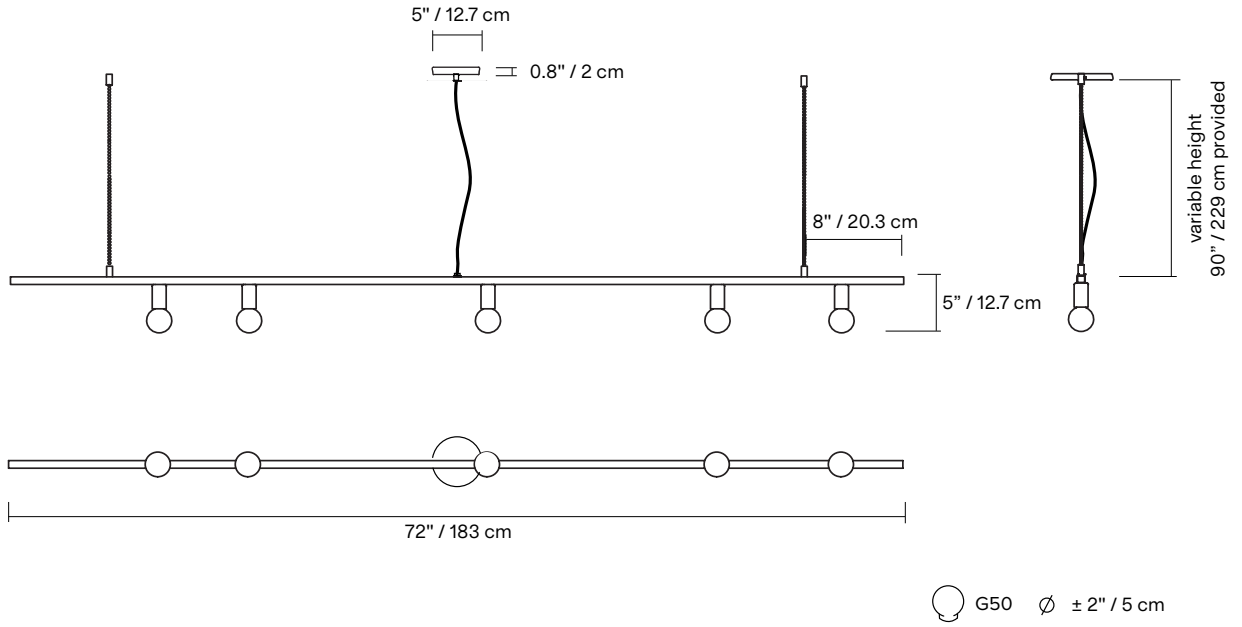


*dimensions are approximate and may vary slightly

FINISH




CORD

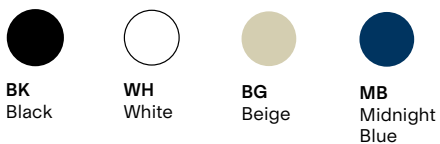

ANCHORS



Swivel option available for slanted ceilings (45° max angle)



NOTES

- Must be installed by an electrician
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions
- Ceiling anchors not meant for slanted ceilings (available upon request)

LAMP ANATOMY

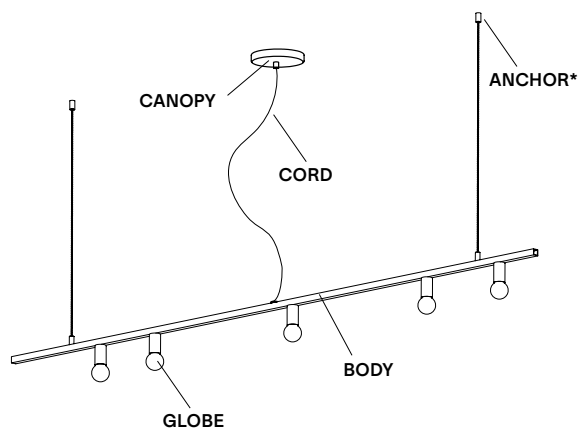

Order Guide: SKU

		Example	Fill with your selection
COLLECTION	DOT Dot	DOT	DOT
MODEL	11	11	11
BODY	BR Brass BK Textured Black WH Textured White BG Textured Beige MB Textured Midnight Blue CC Custom colour*	BR	
CORD	BK Black WH White BG Beige MB Midnight Blue CC Custom colour*	BK	
CANOPY AND ANCHORS	BR Brass BK Textured Black WH Textured White BG Textured Beige MB Textured Midnight Blue CC Custom colour*	BR	
FULL SKU		DOT11BRBKBR	
		NOTES	

*Custom colour available upon request. Material library on website.

Dimmer Specifications

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON - MAESTRO	MAELV-600	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	CTELV-303P	100%	0%	Phase Cut
LUTRON - DIVA	DVELV-300P	100%	0%	Phase Cut
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	Phase Cut

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge**)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
VARILIGHT	V-PRO	100%	2%	Phase Cut
LEGRAND - NILOÉ	3 996 35	87%	15%	Phase Cut
NIKO	310-0280X	94%	5%	Phase Cut
NIKO	310-0190X	100%	1%	Phase Cut

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.






**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.


DOT ANTIPODE



The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

TYPE	Pendant
CONSTRUCTION	Brass body Milk glass globes
SPECIFICATIONS	Source: LED lamp provided (G9 base) Power consumption: 1x 3.5W + 1x 4.5W Lumen output: 697lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard Expected lifetime: ≥ 25 000h
CONTROL	Refer to our recommended list of dimmer models
TOTAL HEIGHT	A: 8.5" B: 14.5" C: 20.5" D: 26.5" E: 38.5" 22cm 37cm 52cm 67cm 98cm
WEIGHT	Min. 2 lb / 0.9 kg
CERTIFICATIONS	     IP20
WARRANTY	2 years

Spec Drawings

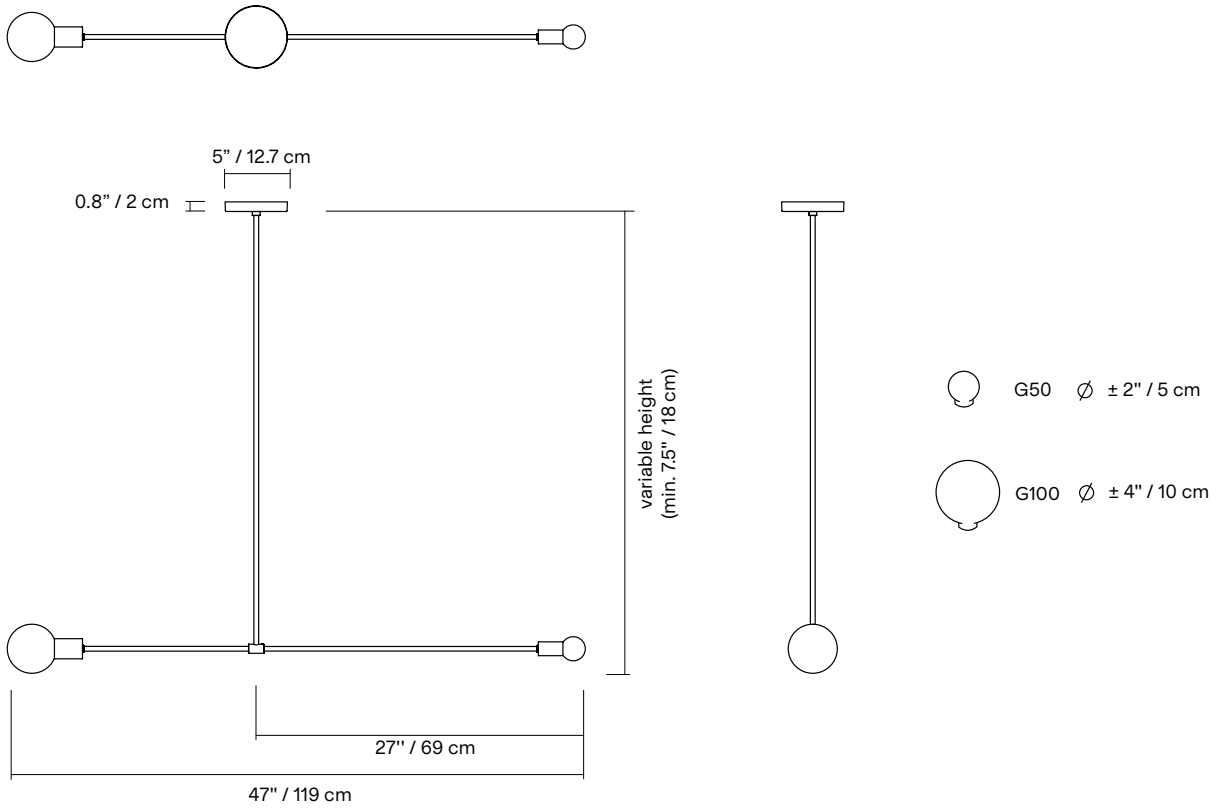

*dimensions are approximate and may vary slightly

FINISH




BR
Brass



GR
Graphite

CANOPY


Swivel option available upon request for slanted ceiling



NOTES

- Must be installed by an electrician
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

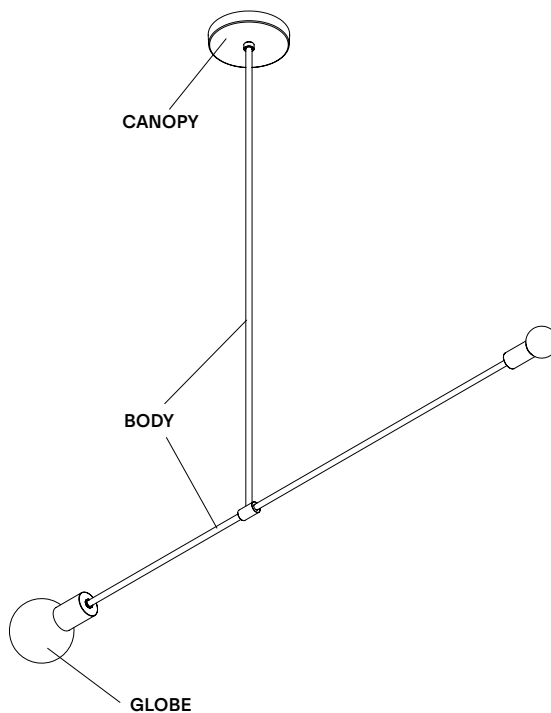

Order Guide: SKU

		Example	Fill with your selection
COLLECTION	DOT Dot	DOT	DOT
MODEL	07	07	07
FINISH	BR Brass GR Graphite	BR	
TOTAL HEIGHT	A 8.5" / 22 cm B 14.5" / 37 cm C 20.5" / 52 cm D 26.5" / 67 cm E 38.5" / 98 cm V Variable	A	
FULL SKU		DOT07BRA	
		NOTES	

Dimmer Specifications

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON - MAESTRO	MAELV-600	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	CTELV-303P	100%	0%	Phase Cut
LUTRON - DIVA	DVELV-300P	100%	0%	Phase Cut
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	Phase Cut

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge**)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
VARILIGHT	V-PRO	100%	2%	Phase Cut
LEGRAND - NILOÉ	3 996 35	87%	15%	Phase Cut
NIKO	310-0280X	94%	5%	Phase Cut
NIKO	310-0190X	100%	1%	Phase Cut

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.






**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.



DOT SUSPENSION



The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

TYPE	Pendant
CONSTRUCTION	Brass or powder coated body Milk glass globes Polyester cord
SPECIFICATIONS	Source: LED lamp provided (G9 base) Power consumption: 3.5W Lumen output: 289lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard Expected lifetime: $\geq 25\ 000$ h
CONTROL	Refer to our recommended list of dimmer models
TOTAL HEIGHT	120" / 305 cm
WEIGHT	min. 1.8 lb / 0.8 kg
CERTIFICATIONS	     IP20
WARRANTY	2 years

Spec Drawings

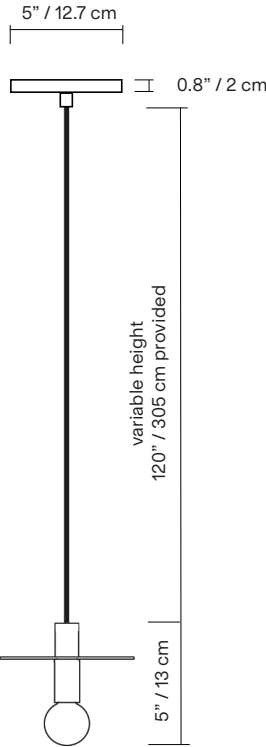

6" / 15 cm

G50 $\varnothing \pm 2" / 5 \text{ cm}$

*dimensions are approximate and may vary slightly

Order Guide: SKU

FINISH



BR
Brass



BK
Textured
Black



WH
Textured
White



BG
Textured
Beige




MB
Textured
Midnight
Blue

NOTES

- Must be installed by an electrician
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

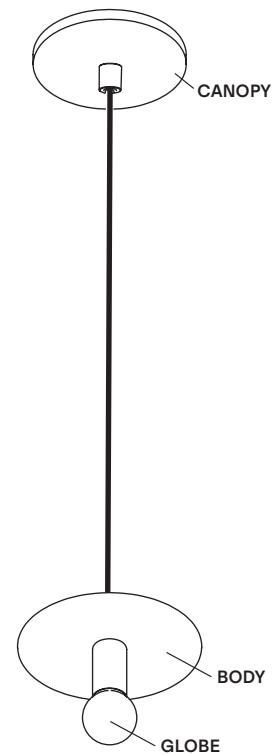

Order Guide: SKU

		Example	Fill with your selection
COLLECTION	DOT Dot	DOT	DOT
MODEL	02	02	02
BODY	BR Brass BK Textured Black WH Textured White BG Textured Beige MB Textured Midnight Blue CC Custom colour*	BR	
CORD	BK Black WH White BG Beige MB Midnight Blue CC Custom colour*	BK	
CANOPY	BR Brass BK Textured Black WH Textured White BG Textured Beige MB Textured Midnight Blue CC Custom colour*	BR	
FULL SKU		DOT02BRBKBR	
		NOTES	

*Custom colour available upon request. Material library on website.

Dimmer Specifications

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON - MAESTRO	MAELV-600	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	CTELV-303P	100%	0%	Phase Cut
LUTRON - DIVA	DVELV-300P	100%	0%	Phase Cut
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	Phase Cut

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge**)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
VARILIGHT	V-PRO	100%	2%	Phase Cut
LEGRAND - NILOÉ	3 996 35	87%	15%	Phase Cut
NIKO	310-0280X	94%	5%	Phase Cut
NIKO	310-0190X	100%	1%	Phase Cut

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.






**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.


DOT TABLE



The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

TYPE	Table
CONSTRUCTION	Brass or powder coated steel and brass body Milk glass globes Polyester cord (vinyl cord for Australia)
SPECIFICATIONS	Source: LED lamp provided (G9 base) Power consumption: 4.5W Lumen output: 371lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard Expected lifetime: ≥ 25 000h
CORD LENGTH	96" / 244 cm, hand switch at 12" / 31 cm from lamp
WEIGHT	1.5 lb / 0.7 kg
CERTIFICATIONS	     IP20
WARRANTY	2 years

Spec Drawings

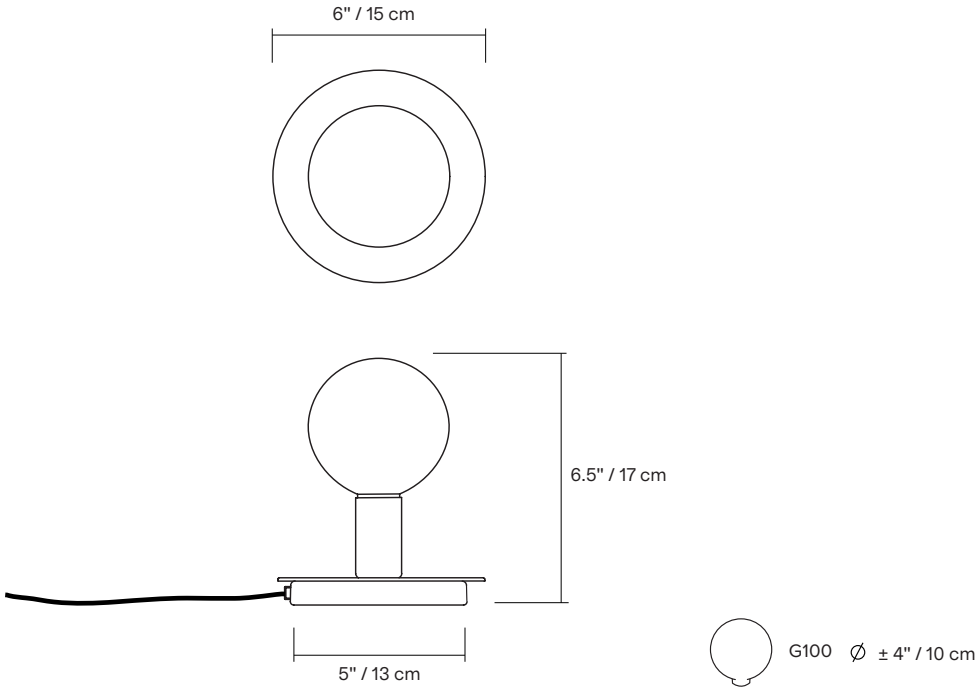

*dimensions are approximate and may vary slightly

Order Guide: SKU

FINISH



BR
Brass



BK
Textured
Black



WH
Textured
White



BG
Textured
Beige



MB
Textured
Midnight
Blue

CORD



BK
Black



WH
White



BG
Beige




MB
Midnight
Blue

NOTES

- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

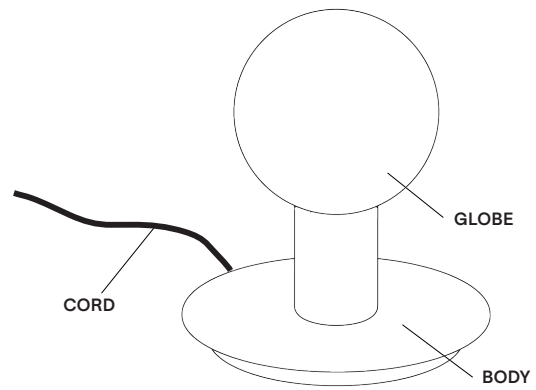

Order Guide: SKU

		Example	Fill with your selection
COLLECTION	DOT Dot	DOT	DOT
MODEL	04	04	04
BODY	BR Brass BK Textured Black WH Textured White BG Textured Beige MB Textured Midnight Blue CC Custom colour*	BR	
CORD**	BK Black WH White BG Beige MB Midnight Blue CC Custom colour*	BK	
FULL SKU		DOT04BRBK	
		NOTES	

*Custom colour available upon request. Material library on website.

**Cord only available in black or white vinyl for Australia.

DOT WALL




SOFTWARE




HARDWIRE

The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.


TYPE	Wall - software (SW) or hardwire (HW)
CONSTRUCTION	Brass or powder coated steel and brass body Milk glass globes Polyester cord (SW)
SPECIFICATIONS	Source: LED lamp provided (G9 base) Power consumption: 3.5W Lumen output: 289lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard Expected lifetime: $\geq 25\ 000$ h
CONTROL	Refer to our recommended list of dimmer models (HW)
CORD LENGTH	Software: 96" / 244 cm Hand switch at 18" / 46 cm from lamp
WEIGHT	min. 1.5 lb / 0.7 kg
CERTIFICATIONS	 IP20
WARRANTY	2 years

Spec Drawings

HARDWIRE

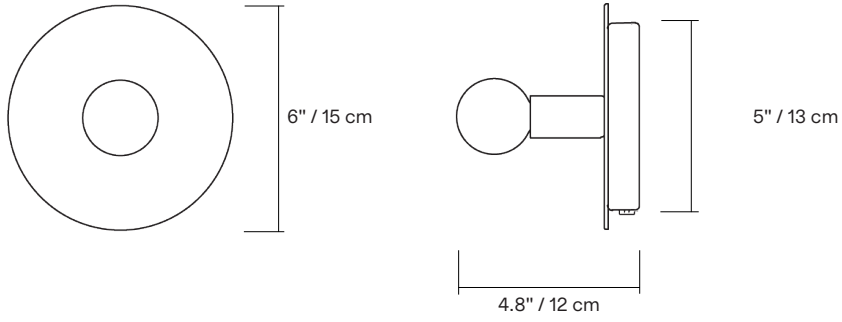

SOFTWIRE

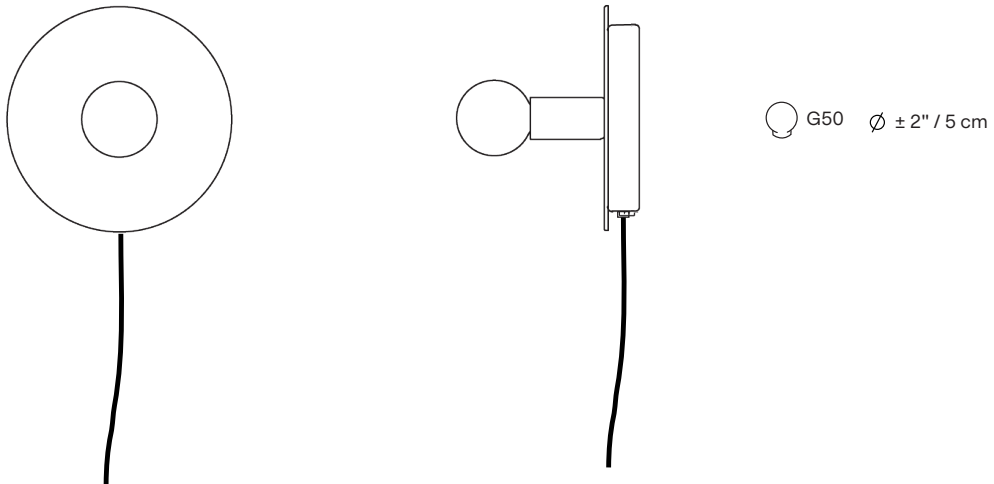

*dimensions are approximate and may vary slightly

Order Guide: SKU

FINISH



BR
Brass



BK
Textured
Black



WH
Textured
White



BG
Textured
Beige



MB
Textured
Midnight
Blue

CORD



BK
Black



WH
White



BG
Beige




MB
Midnight
Blue

NOTES


- Must be installed by an electrician (HW only)
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions
- Wall mount only

LAMP ANATOMY

HARDWIRE

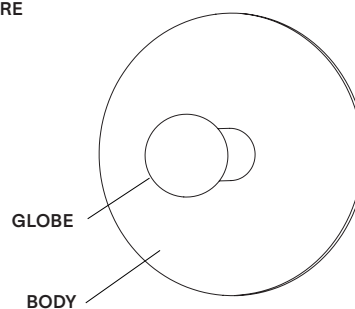

SOFTWIRE

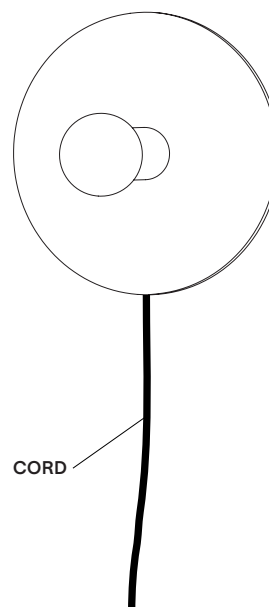

Order Guide: SKU

		Example	Fill with your selection
COLLECTION	DOT Dot	DOT	DOT
MODEL	03	03	03
INSTALLATION	HW Hardwire SW Softwire	HW	
BODY	BR Brass BK Textured Black WH Textured White BG Textured Beige MB Textured Midnight Blue CC Custom colour*	BR	
CORD <small>FOR SOFTWIRE ONLY</small>	BK Black WH White BG Beige MB Midnight Blue CC Custom colour*	BK	
FULL SKU		DOT03HWBR	
		NOTES	

*Custom colour available upon request. Material library on website.

Dimmer Specifications

FOR HARDWIRE ONLY

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON - MAESTRO	MAELV-600	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	CTELV-303P	100%	0%	Phase Cut
LUTRON - DIVA	DVELV-300P	100%	0%	Phase Cut
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	Phase Cut

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge**)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
VARILIGHT	V-PRO	100%	2%	Phase Cut
LEGRAND - NILOÉ	3 996 35	87%	15%	Phase Cut
NIKO	310-0280X	94%	5%	Phase Cut
NIKO	310-0190X	100%	1%	Phase Cut

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.


*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.

DOT LINE WALL

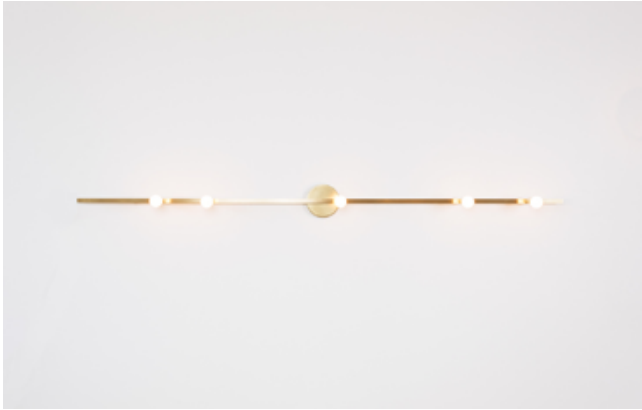






HARDWIRE





SOFTWIRE



The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

TYPE	Wall - softwire (SW) or hardwire (HW)
CONSTRUCTION	Brass or powder coated aluminum and brass body Brass or powder coated brass hardware Milk glass globes Polyester cord (SW)
SPECIFICATIONS	Source: LED lamp provided (G9 base) Power consumption: 5x 3.5W Lumen output: 1202lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard * ≥ 90 CRI upon request Expected lifetime: ≥ 25 000h
CONTROL	Refer to our recommended list of dimmer models (HW)
CORD LENGTH	Softwire hand switch: 96"/ 244 cm provided Switch positioned at 18"/ 46 cm from body Softwire foot switch: 120"/ 305 cm provided Switch positioned at 72"/ 183 cm from body
WEIGHT	Brass: 4.6 lb / 2.1 kg Powder coated aluminum: 3.8 lbs / 1.8 kg
CERTIFICATIONS	     IP20
WARRANTY	2 years

HARDWIRE



SOFTWIRE

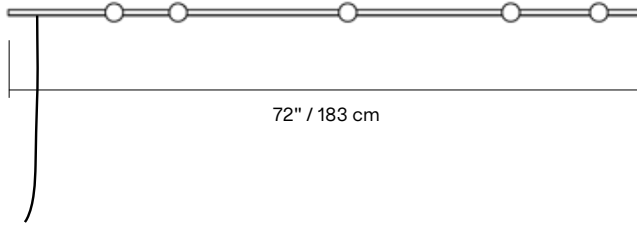

G50 $\varnothing \pm 2" / 50 \text{ mm}$

*dimensions are approximate and may vary slightly


Order Guide: SKU

FINISH



CORD

(*CORDS ONLY AVAILABLE IN BLACK VINYL FOR AUSTRALIA FOR FOOTSWITCH, BLACK OR WHITE FOR HANDSWITCH)

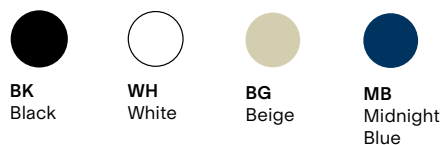


NOTES


- Must be installed by an electrician (HW only)
- Wall mount only
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

HARDWIRE

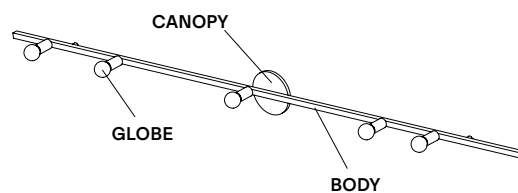

SOFTWIRE

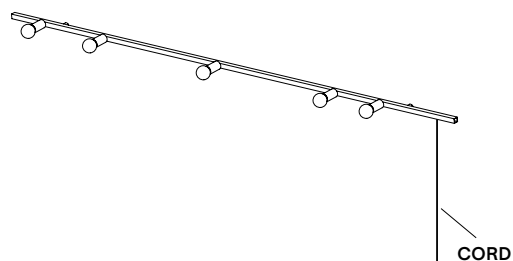

Order Guide: SKU

HARDWIRE

		Example	Fill with your selection
COLLECTION	DOT Dot	DOT	DOT
MODEL	10	10	
INSTALLATION	HW Hardwire	HW	HW
BODY	BR Brass BK Textured Black WH Textured White BG Textured Beige MB Textured Midnight Blue CC Custom colour*	BR	
CANOPY	BR Brass BK Textured Black WH Textured White BG Textured Beige MB Textured Midnight Blue CC Custom colour*	BR	
FULL SKU		DOT10HWBRBR	
		NOTES	

SOFTWARE

		Example	Fill with your selection
COLLECTION	DOT Dot	DOT	DOT
MODEL	10	10	10
INSTALLATION	SW Software	SW	SW
BODY	BR Brass BK Textured Black BG Textured Beige MB Textured Midnight Blue CC Custom colour*	BR	
CORD**	BK Black WH White BG Beige MB Midnight Blue CC Custom colour*	BK	
SWITCH TYPE	HD Hand switch at 18"/ 46 cm FT Foot switch at 72"/ 183 cm	HD	
FULL SKU		DOT10SWBRBKHD	
		NOTES	

*Custom colour available upon request. Material library on website.

**Cords only available in black vinyl for Australia for footswitch, black or white for handswitch)

Dimmer Specifications

FOR HARDWIRE ONLY

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON - MAESTRO	MAELV-600	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	CTELV-303P	100%	0%	Phase Cut
LUTRON - DIVA	DVELV-300P	100%	0%	Phase Cut
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	Phase Cut

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge**)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
VARILIGHT	V-PRO	100%	2%	Phase Cut
LEGRAND - NILOÉ	3 996 35	87%	15%	Phase Cut
NIKO	310-0280X	94%	5%	Phase Cut
NIKO	310-0190X	100%	1%	Phase Cut

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.


**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.


DOT LINE FLOOR



The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

TYPE	Floor
CONSTRUCTION	Brass or powder coated aluminum and brass body Milk glass globes Polyester cord (vinyl cord for Australia)
SPECIFICATIONS	Source: LED lamp provided (G9 base) Power consumption: 3x 3.5W Lumen output: 902lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard Expected lifetime: ≥ 25 000h
CORD LENGTH	96" / 244 cm, foot switch at 24" / 61 cm from lamp
WEIGHT	Brass - 4.6 lb / 2.1 kg Powder coated aluminum - 3.8 lb / 1.8 kg
CERTIFICATIONS	 UL UKCA CE RoHS IP20
WARRANTY	2 years

Spec Drawings

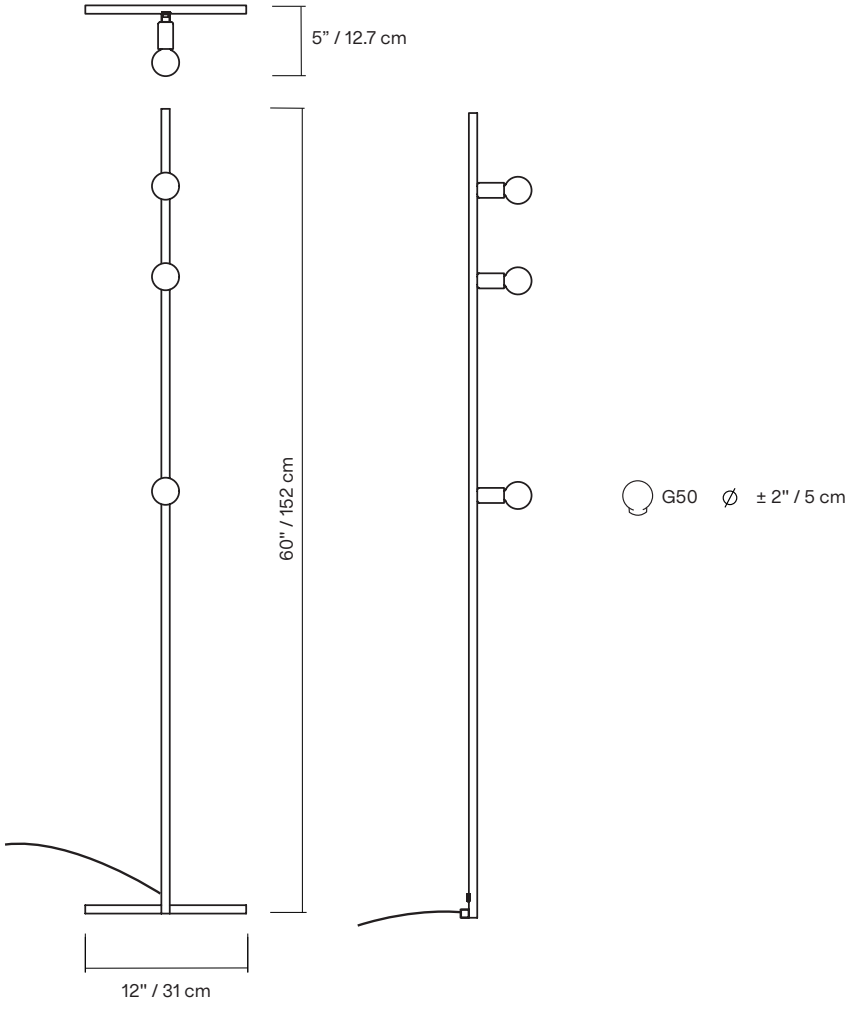

*dimensions are approximate and may vary slightly

Order Guide: SKU

FINISH



BR
Brass



BK
Textured
Black



WH
Textured
White



BG
Textured
Beige



MB
Textured
Midnight
Blue

CORD



BK
Black



WH
White



BG
Beige




MB
Midnight
Blue

NOTES

- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

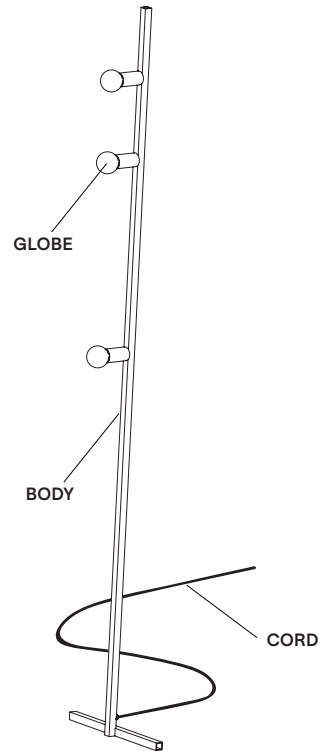


Order Guide: SKU

		Example	Fill with your selection
COLLECTION	DOT Dot	DOT	DOT
MODEL	05	05	05
BODY	BR Brass BK Textured Black WH Textured White BG Textured Beige MB Textured Midnight Blue CC Custom colour*	BR	
CORD**	BK Black WH White BG Beige MB Midnight Blue CC Custom colour*	BK	
FULL SKU		DOT05BRBK	
		NOTES	

*Custom colour available upon request. Material library on website.



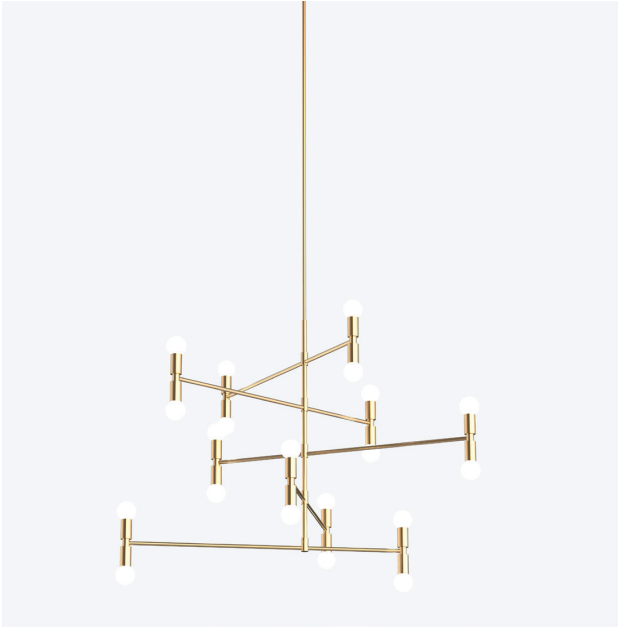


**Cord only available in black or white vinyl for Australia.


DOT 14




A

The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

TYPE	Pendant					
CONSTRUCTION	Brass body Milk glass globes					
SPECIFICATIONS	Source: LED lamp provided (G9 base) Power consumption: (A,C) 20×3.5W; (B) 12 × 3.5W, Lumen output: (A,C) 6010lm, (B) 3606lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard * ≥ 90 CRI upon request Expected lifetime: ≥ 25 000h					
CONTROL	Refer to our recommended list of dimmer models					
TOTAL HEIGHT	A, C	34" 86cm	40" 102 cm	46" 117 cm	52" 132 cm	64" 163 cm
	B	24.5" 62cm	30.5" 77 cm	36.5" 93 cm	42.5" 108 cm	54.5" 138 cm
WEIGHT	Min. 5.5 lb / 2.5 Kg					
CERTIFICATIONS	    					
WARRANTY	2 years					






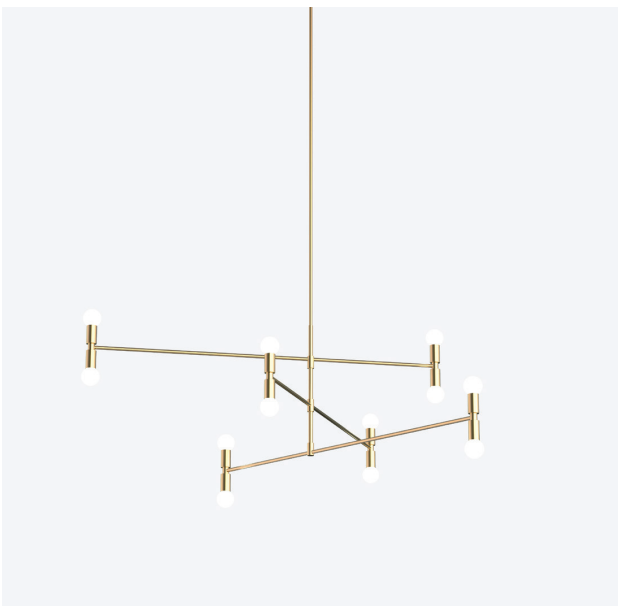


B

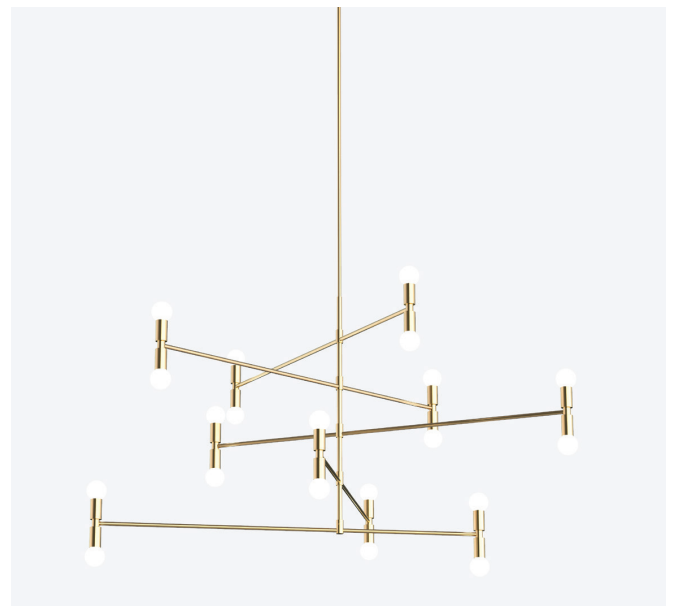

C

Spec Drawings

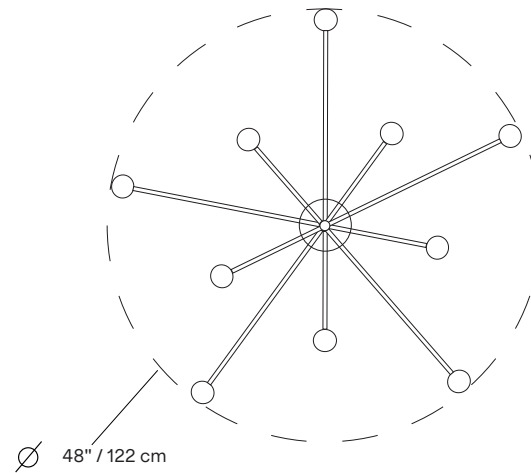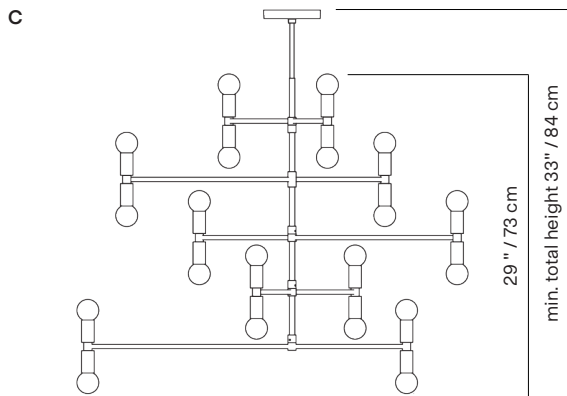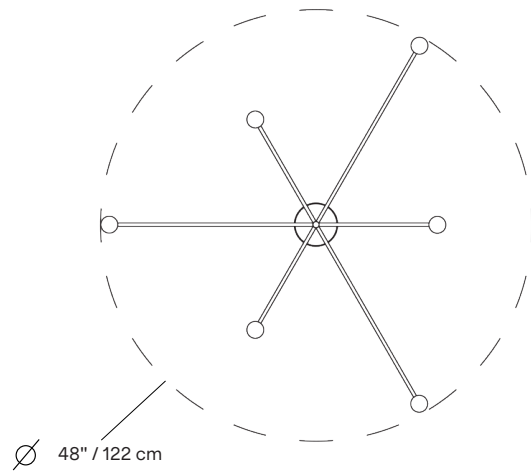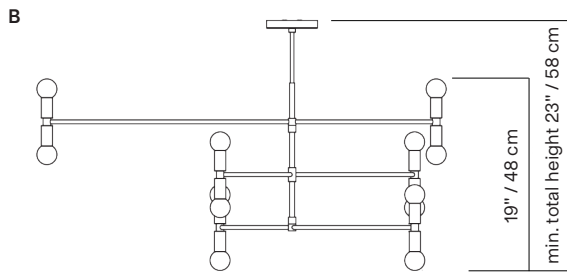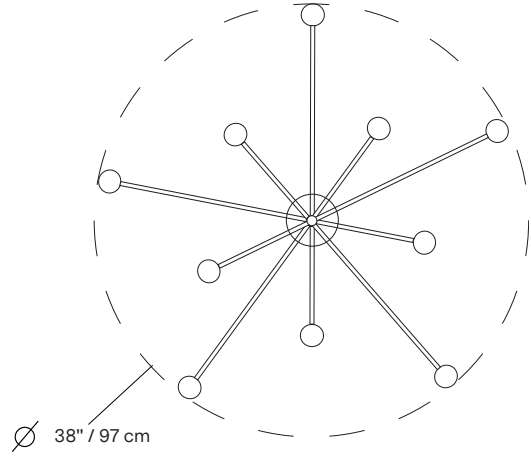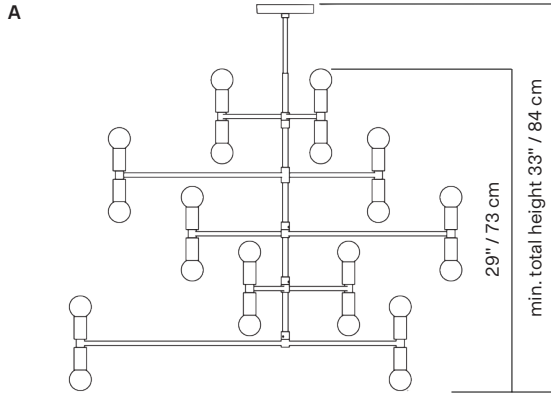

*dimensions are approximate and may vary slightly

FINISH




BR
Brass



GR
Graphite

CANOPY

Swivel option available for slanted ceiling




NOTES

- Must be installed by an electrician
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

DO14 A

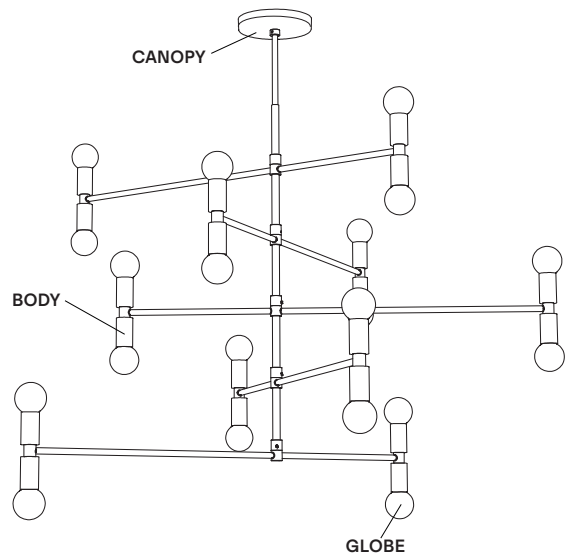

Order Guide: SKU

DOT 14 A and C

		Example	Fill with your selection
COLLECTION	DOT Dot	DOT	DOT
MODEL	14A 14C	14A	
FINISH	BR Brass GR Graphite	BR	
HEIGHT	A 34.25" / 86 cm B 40.25" / 102 cm C 46.25" / 117 cm D 52.25" / 132 cm E 64.25" / 163 cm V Variable	A	
FULL SKU		DOT14ABRA	
NOTES			

DOT 14 B

		Example	Fill with your selection
COLLECTION	DOT Dot	DOT	DOT
MODEL	14B	14B	14B
FINISH	BR Brass GR Graphite	BR	
HEIGHT	A 24.5" / 62 cm B 30.5" / 77 cm C 36.5" / 93 cm D 42.5" / 108 cm E 54.5" / 138 cm V Variable	A	
FULL SKU		DOT14BBRA	
NOTES			

Dimmer Specifications

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON - MAESTRO	MAELV-600	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	CTELV-303P	100%	0%	Phase Cut
LUTRON - DIVA	DVELV-300P	100%	0%	Phase Cut
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	Phase Cut

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge**)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
VARILIGHT	V-PRO	100%	2%	Phase Cut
LEGRAND - NILOÉ	3 996 35	87%	15%	Phase Cut
NIKO	310-0280X	94%	5%	Phase Cut
NIKO	310-0190X	100%	1%	Phase Cut

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.
