




DOT ATOMIUM



type	suspension				
materials	body :	brass			
	sphere :	milk glass (G50)			
	hardware :	brass			
total height	24 ½"	30 ½"	36 ½"	42 ½"	54 ½"
	622mm	775 mm	927mm	1080mm	1384mm
weight (min.)	min. 5.5 lb / 2.5 kg - max. 6 lb / 2.7 kg				
light bulb	LED (included), 12x 3.5W				
sockets	G9				
voltage	120V / 240V				
dimmer	refer to our recommended list of dimmer models				
certifications	 				
notes	<ul style="list-style-type: none">– must be installed by an electrician;– additional charges for modifications or for special orders;– lead time between 7-9 weeks;– dimensions are approximate and may vary slightly.				

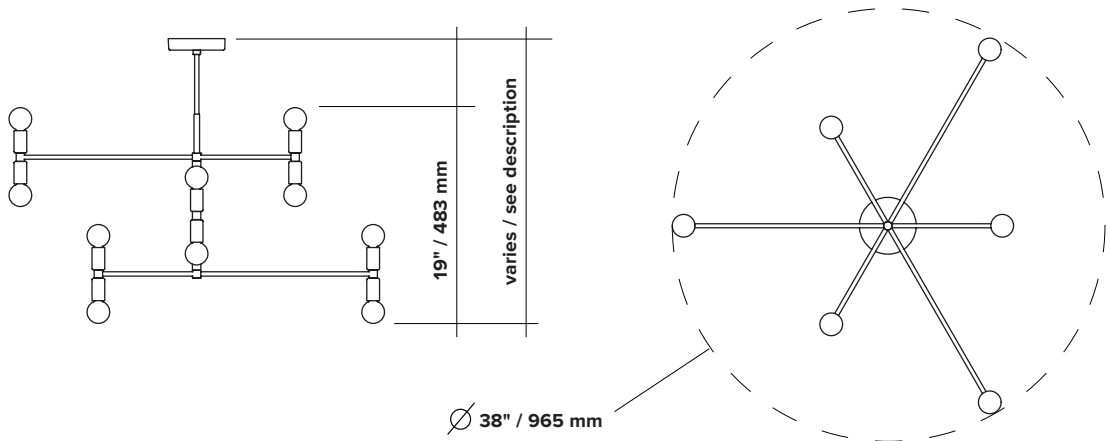

ORDER GUIDE: SKU



COLLECTION		MODEL	FINISH		HEIGHT	
DOT	Dot	01	BR	brass	A	24 ½" / 622 mm
			GR	graphite	B	30 ½" / 775 mm
					C	36 ½" / 927 mm
					D	42 ½" / 1080 mm
					E	54 ½" / 1384 mm
					V	custom
DOT		01	BR		A	= DOT01BRA
						example

FINISH

brass


graphite

CANOPY
 swivel option for slanted ceiling

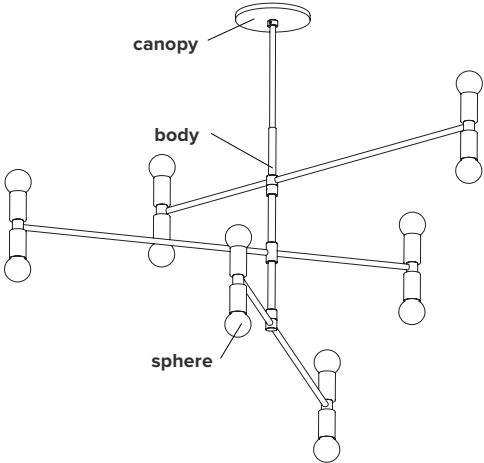

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
3.5W
100V-120V / 240V
350 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty

SPHERES



G50 Ø ±2" / 50 mm



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V


<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.




DOT

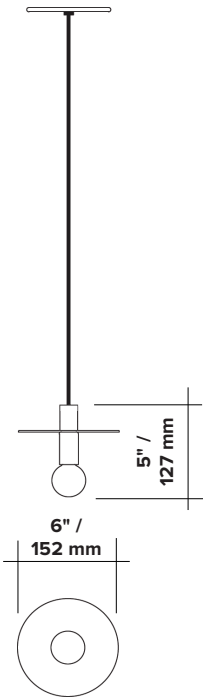


type	suspension	
materials	body :	brass (BR) or powder coated steel and aluminium (BL/WH)
	sphere :	milk glass
	wire:	nylon
wire length	120" / 3048 mm	
weight	1.8 lb / 0.8 kg	
light bulb	LED (included), 3,5W	
sockets	G9	
voltage	120V / 240V	
dimmer	refer to our recommended list of dimmer models	
certifications	 	
notes	<ul style="list-style-type: none">– must be installed by an electrician– lead time between 7-9 weeks– dimensions are approximate and may vary slightly	



ORDER GUIDE: SKU


COLLECTION		MODEL	FINISH	
DOT	dot	02	BR	brass
			BL	black
			WH	white
DOT		02	BR	
FINISH				
				
brass		flat black		flat white

= DOT02BR
example

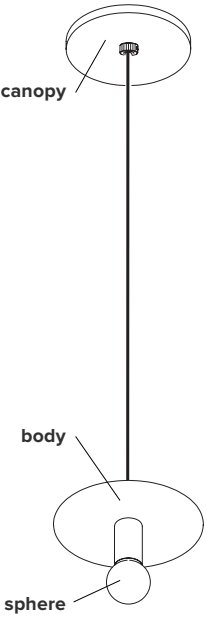

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
3.5W
100V-120V / 240V
350 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty

SPHERES



G100 Ø ± 4" / 100 mm



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good


DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V


<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

DOT LINE SUSPENSION




type	suspension	
materials	body :	brass (BR) or powder coated aluminium (BL/WH)
	hardware :	brass
	sphere :	milk glass (G50)
	canopy :	powder coated steel (WH)
	chain :	brass
	wire :	nylon
wire length	96" / 2438 mm	
cable length	90" / 2286 mm	
weight	1.8 lb / 0.8 kg	
light bulb	LED (included), 5x 3,5W	
sockets	G9	
voltage	120V / 240V	
dimmer	refer to our recommended list of dimmer models	
certifications		
notes	– must be installed by an electrician	
	– additional charges for modifications or for special orders	
	– lead time between 7-9 weeks	
	– dimensions are approximate and may vary slightly	

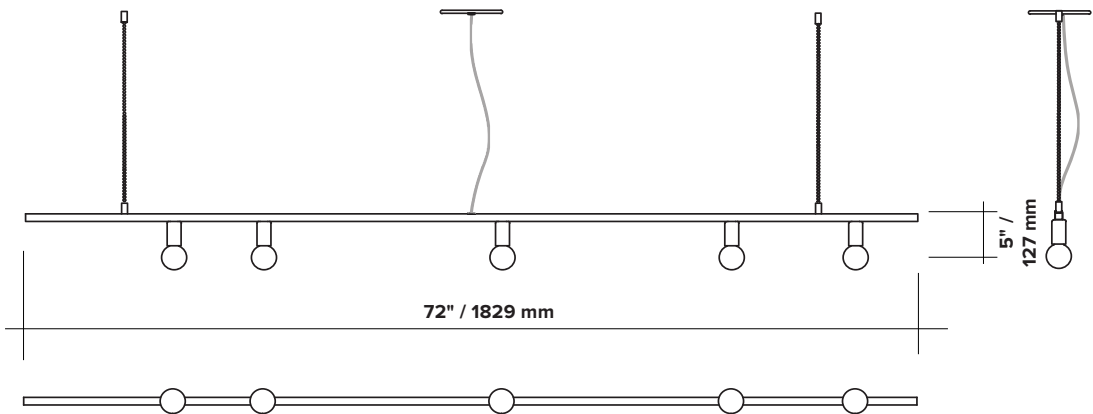

ORDER GUIDE: SKU

COLLECTION		MODEL	FINISH/WIRE/CANOPY	
DOT	dot	11	BRBLBR	brass/black/brass
			BRBLWH	brass/black/white
			BLBLBL	black/black/black
			BLBLWH	black/black/white
			WHWHWH	white/white/white
DOT		11	BRBR	= DOT11BRBLBR
				example

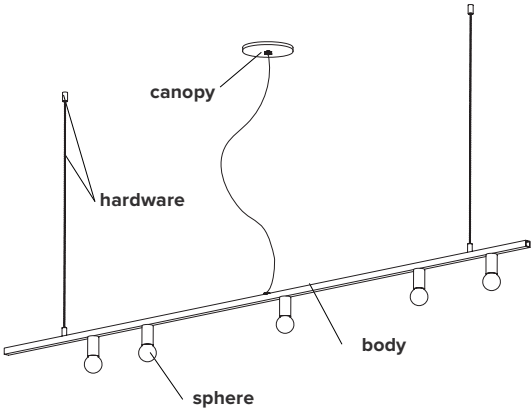

FINISH



brass




flat black



flat white

CANOPY COLOR



brass




flat black



flat white

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
3.5W
100V-120V / 240V
350 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty

SPHERES



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V


<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

DOT - ANTIPODE



type	suspension				
materials	body :	brass			
	spheres :	milk glass (G50 + G100)			
	hardware :	brass			
height	8 ½"	14 ½"	20 ½"	26 ½"	38 ½"
	216 mm	368 mm	521 mm	673 mm	978 mm
weight	min. 2 lb / 0.9 kg - max. 2.5 lb / 1.1 kg				
light bulb	LED (included), 1x 4.5W + 1x 3.5W				
sockets	G9				
voltage	120V / 240V				
dimmer	refer to our recommended list of dimmer models				
certifications	 				
notes	<ul style="list-style-type: none">– must be installed by an electrician;– additional charges for modifications or for special orders;– lead time between 7-9 weeks;– dimensions are approximate and may vary slightly.				

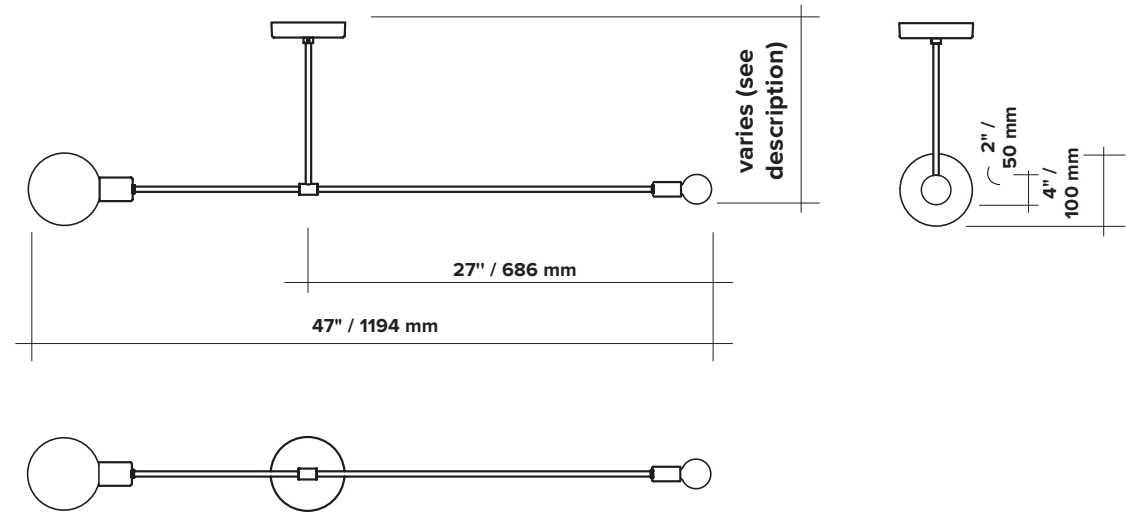

ORDER GUIDE: SKU

COLLECTION		MODEL	FINISH		HEIGHT	
DOT	dot	07	BR	brass	A	8 ½" / 216 mm
			GR	graphite	B	14 ½" / 368 mm
					C	20 ½" / 521 mm
					D	26 ½" / 673 mm
					E	38 ½" / 978 mm
					V	custom
DOT		07	BR		A	= DOT07BRA
						example

FINISH





brass




graphite

CANOPY
 swivel option for slanted ceiling

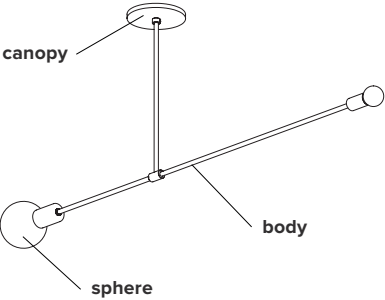


LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



Frosted
3.5W
100V-120V / 240V
350 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



SPHERES



G100 Ø ± 4" / 100 mm



G50 Ø ± 2" / 50 mm

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

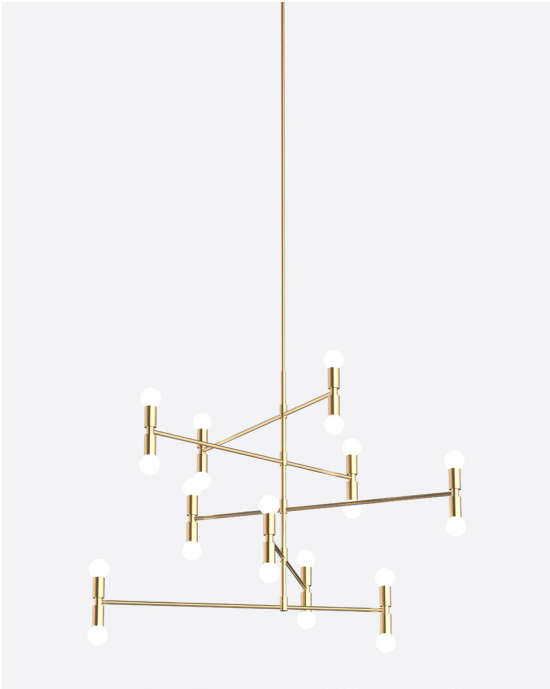


DOT 14




A





B

Type	Suspension	
Materials	Body:	brass
	Sphere:	milk glass (G50)
	Hardware:	brass
Total Height	Height to be specified upon order	
Weight (min.)	A	min. 6 lb / 2.7 kg
	B	min. 6 lb / 2.7 kg
	C	min. 7 lb / 3.2 kg
Light Bulb	A	LED (included), 20x 3.5W
	B	LED (included), 12x 3.5W
	C	LED (included), 20x 3.5W
Sockets	G9	
Voltage	120V / 240V	
Dimmer	Refer to our recommended list of dimmer models	
Certifications	  	
Notes	• Must be installed by an electrician	
	• Additional charges for modifications	
	• Lead time between 10-12 weeks	
	• Dimensions are approximate and may vary slightly	


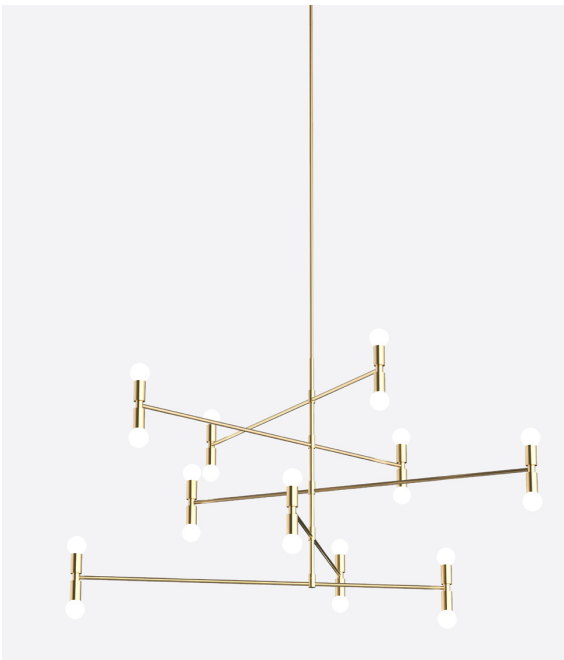


C



A

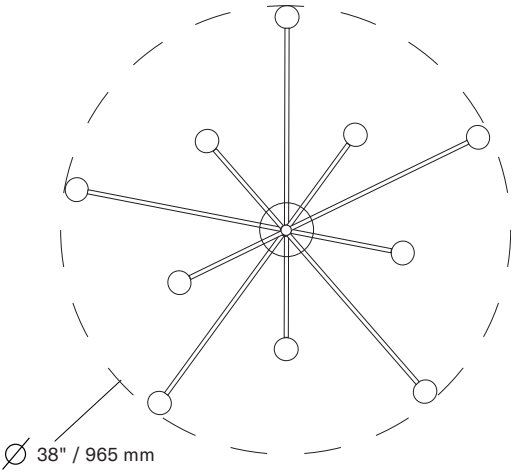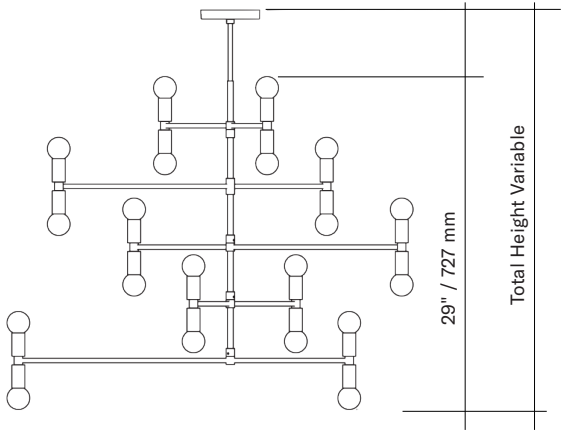

B

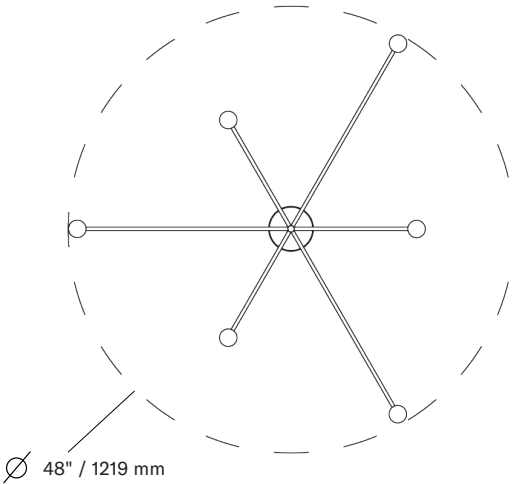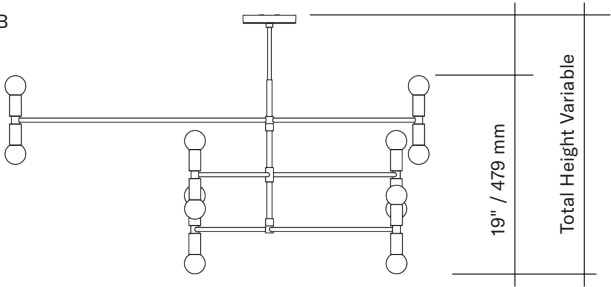


C

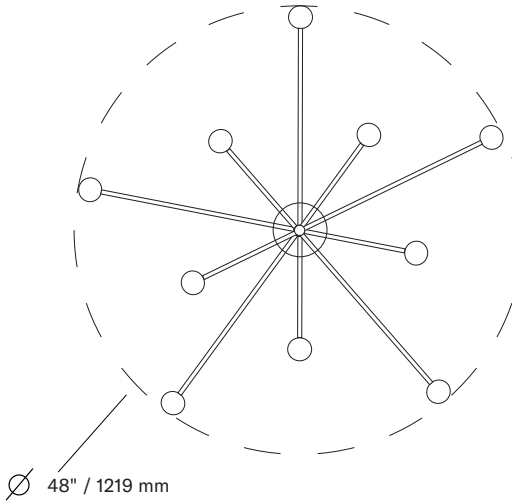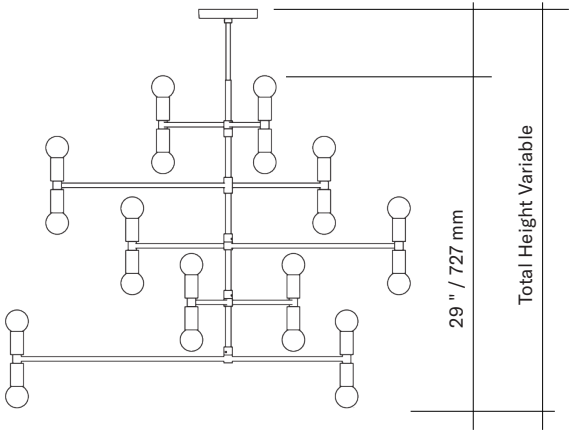

Order Guide: SKU

Collection		Model	Finish		Size	
DOT	Dot	14	BR	Brass	A	∅ 38" / 965mm 5 Level
			GR	Graphite	B	∅ 48" / 1219mm 3 Level
					C	∅ 48" / 1219mm 5 Level
DOT		14	BR		A = DOT14BRA	
					example	

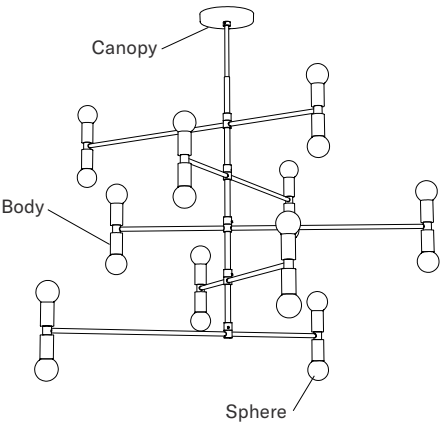

Finish




Brass



Graphite


Canopy

Swivel option for slanted ceiling



Light Bulb & Dimmer Specifications

G9 Sockets



Frosted
3.5W
100V-120V / 240V
350 Lumens
2,700K
25,000H
CRI ≥ 80
2 years warranty

Spheres

 G50 Ø ± 2" / 50 mm



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.