


LAURENT 01




type	suspension
materials	sphere: handblown opaline glass frame: polished brass or powder coated aluminum or nickel plated steel hardware: powder coated brass wire: nylon/polyester
weight	9 lb / 4 kg
light bulb	LED (included), 4,5W (see lightbulb section for specifications)
sockets	G9
voltage	120V / 240V
dimmer	refer to our recommended list of dimmer models
certifications	
notes	<ul style="list-style-type: none">– must be installed by an electrician– additional charges for modifications or for special orders– lead time between 7-9 weeks


parallel wires

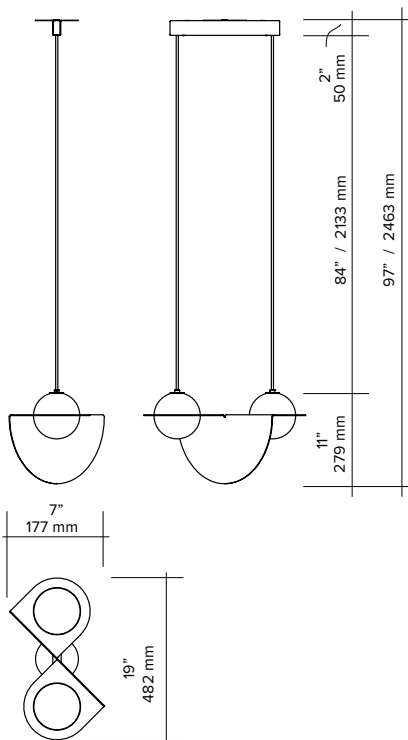

parallel wires with offset connection

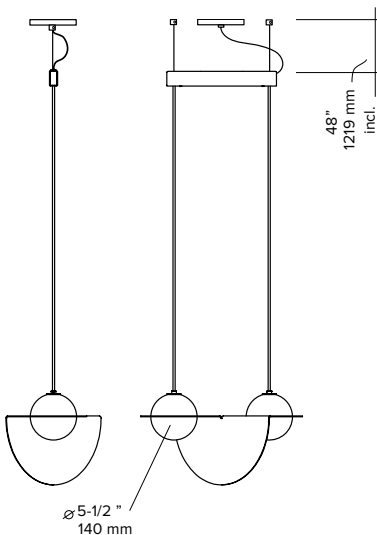


angled wires

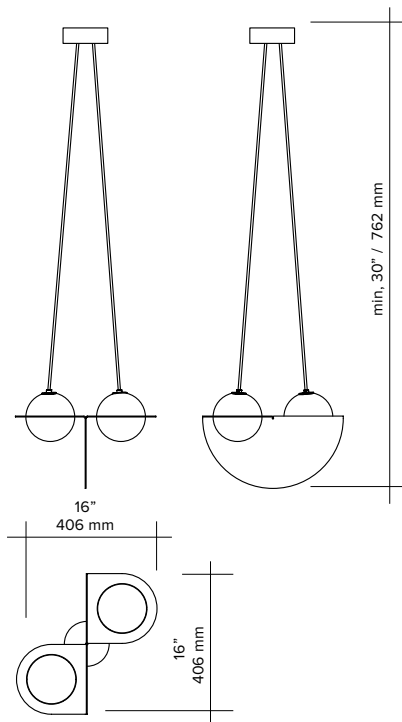


ORDER GUIDE: SKU

COLLECTION		MODEL	COLOUR (frame + wire system)		CANOPY	MOUNTING TYPE		
LRT	Laurent	01	BLBL	black + black	BL	black	AW	angled wires
			BRBL	brass + black			PW	parallel wires
			BRGD	brass + gold				
			CHBL	chrome + black				
			CHBE	chrome + blue				
			BEBL	blue + black				
			BEBE	blue + blue				
			BUBL	burgundy + black				
			BUSA	burgundy + sand				
			BUBU	burgundy + burgundy				
			TUBL	turquoise + black				
			TUSA	turquoise + sand				
LRT		01	BLBL		BL		AW	= LRT01BLBLBLAW
								example

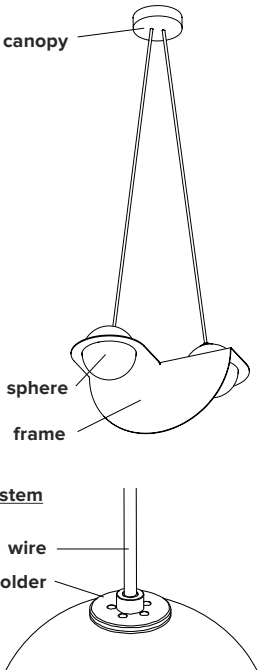


FRAME COLOUR

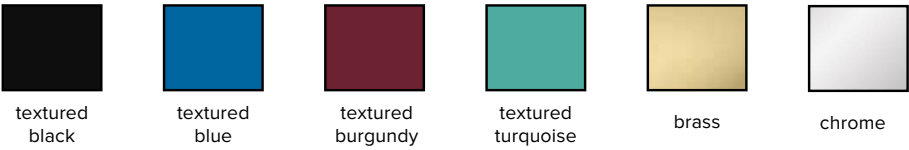


MOUNTING COLOUR
sphere holder & wires



CANOPY COLOR
custom color available on demand




MOUNTING TYPE

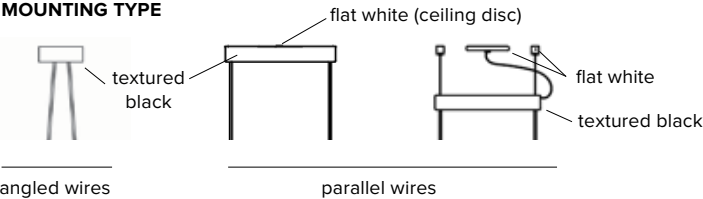


LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good


*Other dimmers can yield good results and we recommend conducting your own test before final installation.

LAURENT 02

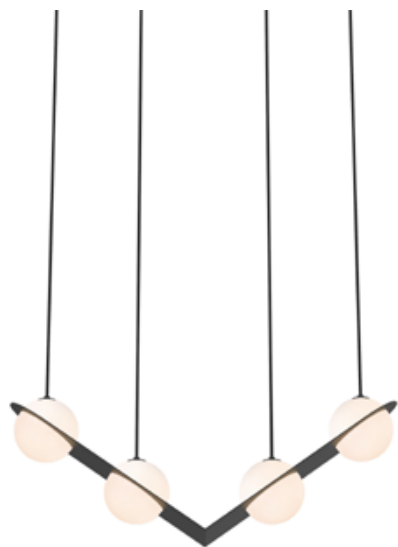


type	suspension	
materials	sphere:	handblown opaline glass
	frame:	polished brass or powder coated aluminum or nickel plated steel
	hardware:	polished brass or powder coated aluminium
	wire:	nylon/polyester
weight	13,5 lb / 6 kg	
light bulb	LED (included), 4,5W (see lightbulb section for specifications)	
sockets	G9	
voltage	120V / 240V	
dimmer	refer to our recommended list of dimmer models	
certifications		
notes	– must be installed by an electrician	
	– additional charges for modifications or for special orders	
	– lead time between 7-9 weeks.	
	– dimensions are approximate and may vary slightly.	


parallel wires

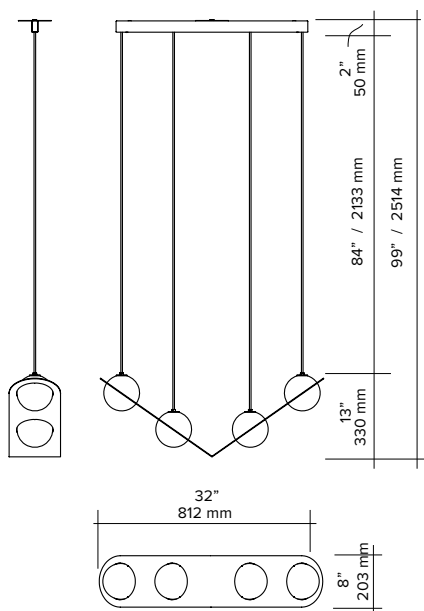

parallel wires with offset connection

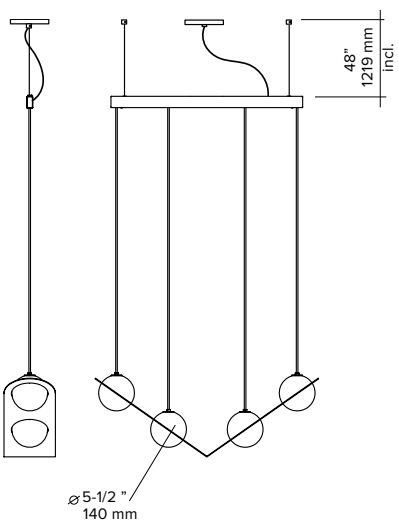


angled wires

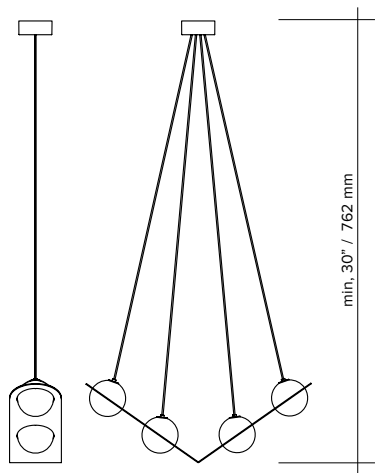


ORDER GUIDE: SKU

COLLECTION		MODEL	COLOUR (frame + wire system)		CANOPY	MOUNTING TYPE		
LRT	Laurent	02	BLBL	black + black	BL	black	AW	angled wires
			BRBL	brass + black			PW	parallel wires
			BRGD	brass + gold				
			CHBL	chrome + black				
			CHBE	chrome + blue				
			BEBL	blue + black				
			BEBE	blue + blue				
			BUBL	burgundy + black				
			BUSA	burgundy + sand				
			BUBU	burgundy + burgundy				
			TUBL	turquoise + black				
			TUSA	turquoise + sand				

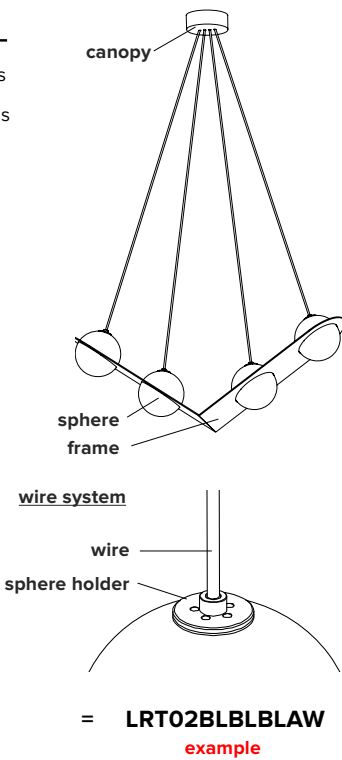


FRAME COLOUR




MOUNTING COLOUR
sphere holder & wires



CANOPY COLOR
custom color available on demand




MOUNTING TYPE

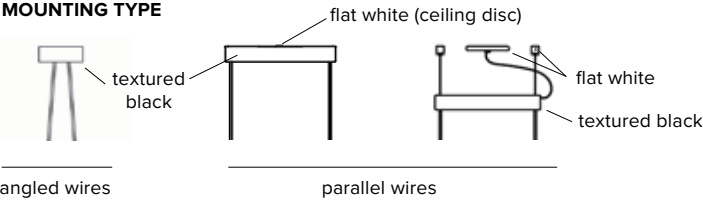



LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good


*Other dimmers can yield good results and we recommend conducting your own test before final installation.

LAURENT 03

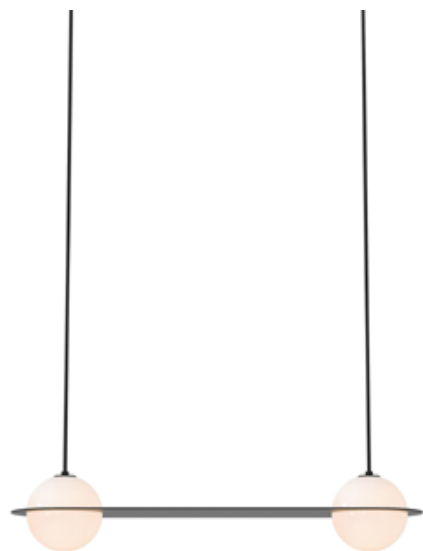


type	suspension
materials	sphere: handblown opaline glass frame: polished brass or powder coated aluminum or nickel plated steel hardware: polished brass or powder coated aluminium wire: nylon/polyester
weight	10 lb / 4,5 kg
light bulb	LED (included), 4,5W (see lightbulb section for specifications)
sockets	G9
voltage	120V / 240V
dimmer	refer to our recommended list of dimmer models
certifications	
notes	<ul style="list-style-type: none">- must be installed by an electrician- additional charges for modifications or for special orders- lead time between 7-9 weeks.- dimensions are approximate and may vary slightly.


parallel wires

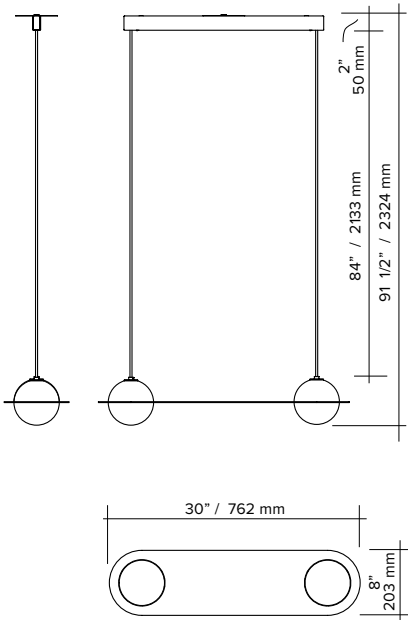

parallel wires with offset connection


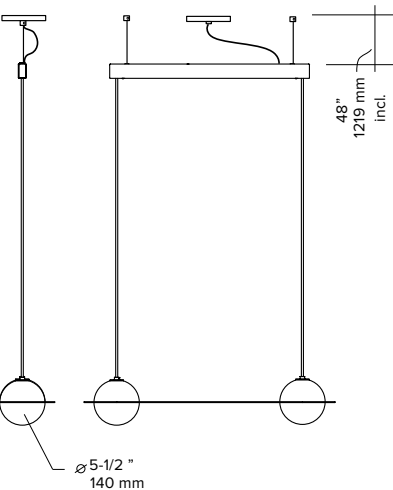


angled wires

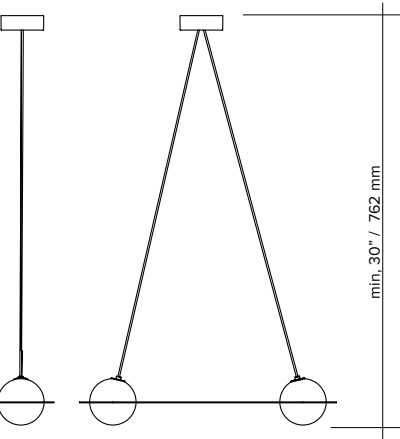


ORDER GUIDE: SKU

COLLECTION		MODEL	COLOUR (frame + wire system)		CANOPY	MOUNTING TYPE		
LRT	Laurent	03	BLBL	black + black	BL	black	AW	angled wires
			BRBL	brass + black			PW	parallel wires
			BRGD	brass + gold				
			CHBL	chrome + black				
			CHBE	chrome + blue				
			BEBL	blue + black				
			BEBE	blue + blue				
			BUBL	burgundy + black				
			BUSA	burgundy + sand				
			BUBU	burgundy + burgundy				
			TUBL	turquoise + black				
			TUSA	turquoise + sand				

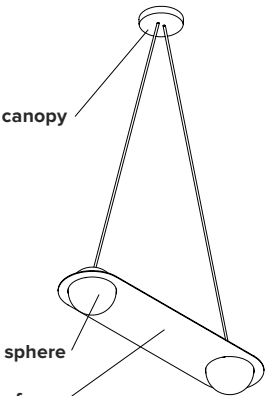

= LRT03BLBLBLAW
example


FRAME COLOUR

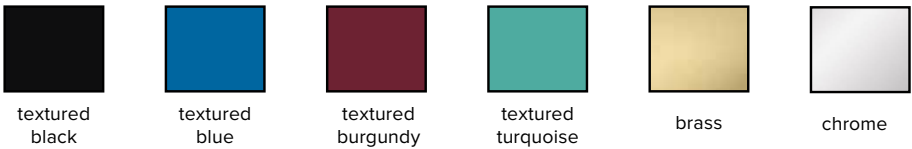


MOUNTING COLOUR
sphere holder & wires



CANOPY COLOR
custom color available on demand




MOUNTING TYPE

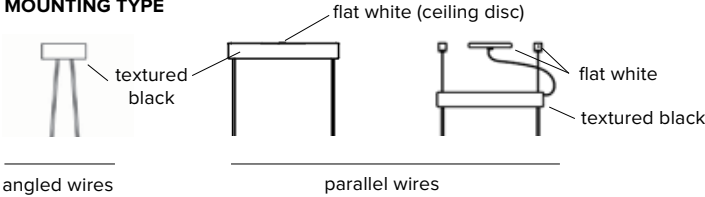


LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good


*Other dimmers can yield good results and we recommend conducting your own test before final installation.

LAURENT 04

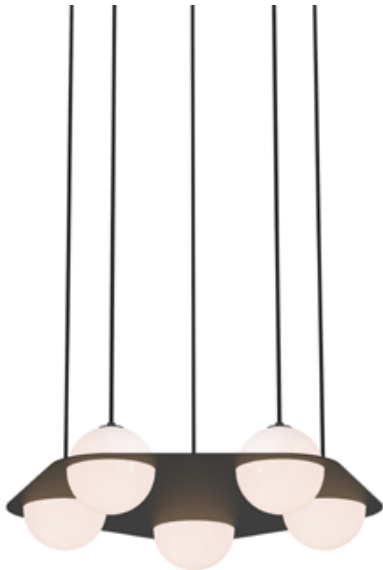


type	suspension
materials	sphere: handblown opaline glass frame: polished brass or powder coated aluminum or nickel plated steel hardware: polished brass or powder coated aluminium wire: nylon/polyester
weight	14 lb / 6 kg
light bulb	LED (included), 4,5W (see lightbulb section for specifications)
sockets	G9
voltage	120V / 240V
dimmer	refer to our recommended list of dimmer models
certifications	
notes	<ul style="list-style-type: none">- must be installed by an electrician- additional charges for modifications or for special orders- lead time between 7-9 weeks.- dimensions are approximate and may vary slightly.


parallel wires

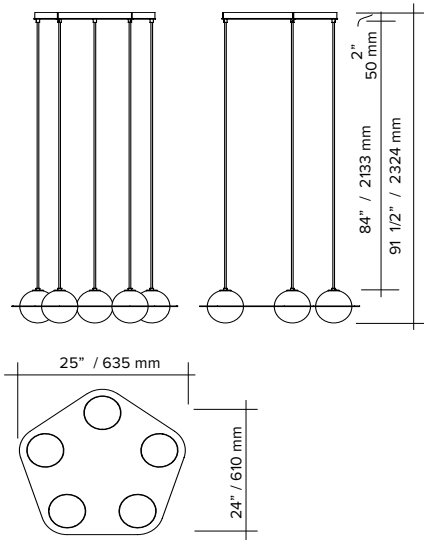

parallel wires with offset connection

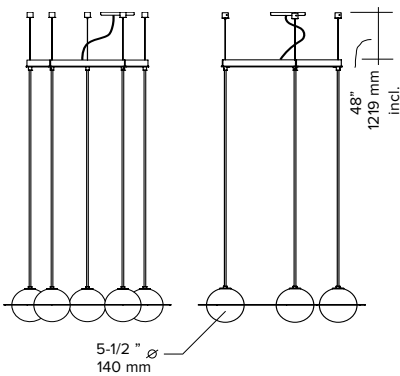

angled wires

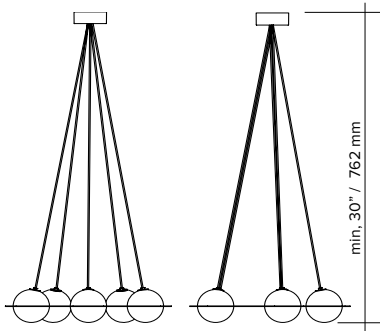

ORDER GUIDE: SKU

COLLECTION		MODEL	COLOUR (frame + wire system)		CANOPY	MOUNTING TYPE		
LRT	Laurent	04	BLBL	black + black	BL	black	AW	angled wires
			BRBL	brass + black			PW	parallel wires
			BRGD	brass + gold				
			CHBL	chrome + black				
			CHBE	chrome + blue				
			BEBL	blue + black				
			BEBE	blue + blue				
			BUBL	burgundy + black				
			BUSA	burgundy + sand				
			BUBU	burgundy + burgundy				
			TUBL	turquoise + black				
			TUSA	turquoise + sand				
LRT		04	BLBL		BL		AW	

canopy

sphere

frame

wire system

wire

sphere holder

= LRT04BLBLBLAW

example

FRAME COLOUR

textured black	textured blue	textured burgundy	textured turquoise	brass	chrome

MOUNTING COLOUR
sphere holder & wires

textured black	textured blue	textured burgundy	textured sand	gold

CANOPY COLOR
custom color available on demand


textured black	flat white

MOUNTING TYPE


angled wires	parallel wires

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good


DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good


*Other dimmers can yield good results and we recommend conducting your own test before final installation.

LAURENT 05




type	suspension
materials	sphere: handblown opaline glass frame: polished brass (BR) or powder coated aluminum (Colors) or nickel plated steel (CH) hardware: polished brass or powder coated aluminium wire: nylon/polyester
weight	9 lb / 4 kg
light bulb	LED (included), 4,5W (see lightbulb section for specifications)
sockets	G9
voltage	120V / 240V
dimmer	refer to our recommended list of dimmer models
certifications	
notes	<ul style="list-style-type: none">– must be installed by an electrician– additional charges for modifications or for special orders– lead time between 7-9 weeks.– dimensions are approximate and may vary slightly.


parallel wires

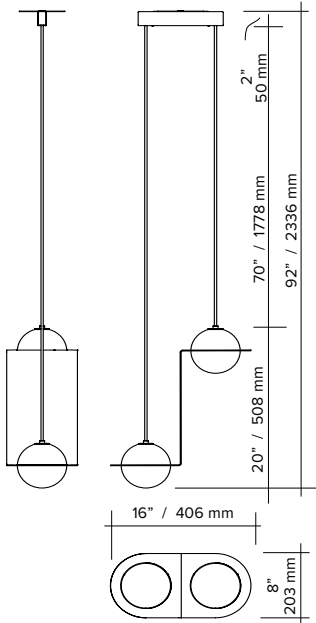

parallel wires with offset connection

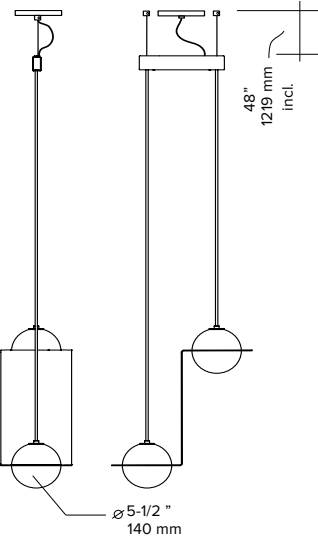

angled wires

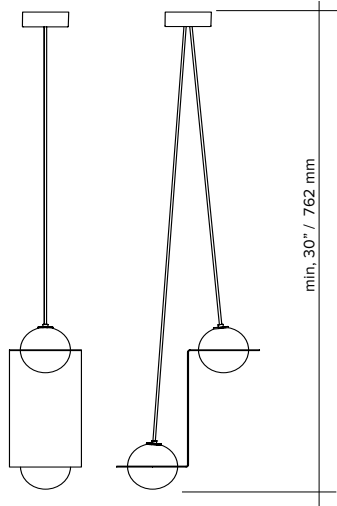

ORDER GUIDE: SKU

COLLECTION		MODEL	FINISH (frame + wire system)		CANOPY	MOUNTING TYPE		
LRT	Laurent	05	BLBL	black + black	BL	black	AW	angled wires
			BRBL	brass + black			PW	parallel wires
			BRGD	brass + gold				
			CHBL	chrome + black				
			CHBE	chrome + blue				
			BEBL	blue + black				
			BEBE	blue + blue				
			BUBL	burgundy + black				
			BUSA	burgundy + sand				
			BUBU	burgundy + burgundy				
			TUBL	turquoise + black				
			TUSA	turquoise + sand				
LRT		05	BLBL		BL		AW	

canopy

sphere

frame

wire system

wire

sphere holder

= LRT05BLBLBLAW

example

FRAME FINISH

textured black	textured blue	textured burgundy	textured turquoise	brass	chrome

MOUNTING COLOUR
sphere holder & wires

textured black	textured blue	textured burgundy	textured sand	gold

CANOPY COLOR
custom color available on demand


textured black	flat white

MOUNTING TYPE


angled wires	parallel wires

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good


DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good


*Other dimmers can yield good results and we recommend conducting your own test before final installation.

LAURENT 06




type	suspension
materials	sphere: handblown opaline glass frame: polished brass or powder coated aluminum or nickel plated steel hardware: polished brass or powder coated aluminium wire: nylon/polyester
weight	10 lb / 4,5 kg
light bulb	LED (included), 4,5W (see lightbulb section for specifications)
sockets	G9
voltage	120V / 240V
dimmer	refer to our recommended list of dimmer models
certifications	
notes	<ul style="list-style-type: none">- must be installed by an electrician- additional charges for modifications or for special orders- lead time between 7-9 weeks.- dimensions are approximate and may vary slightly.


parallel wires

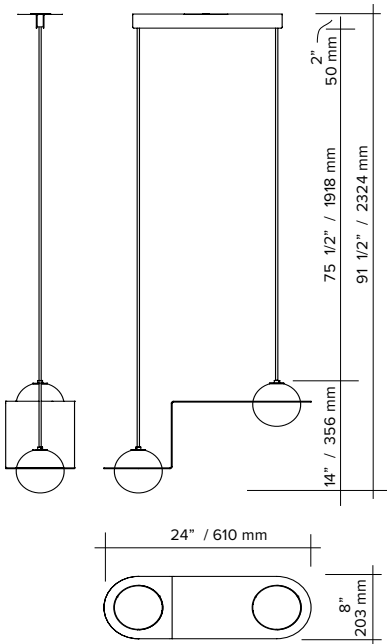

parallel wires with offset connection


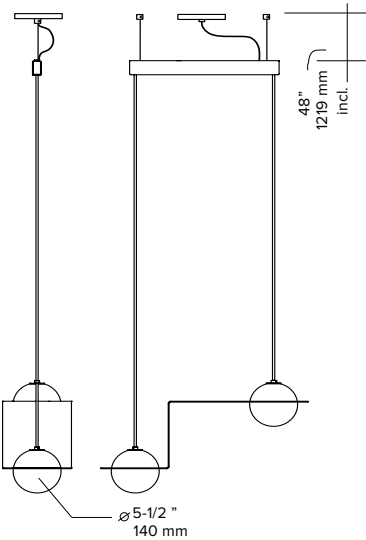


angled wires

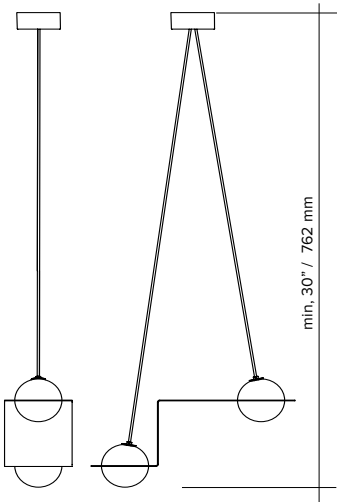


ORDER GUIDE: SKU

COLLECTION		MODEL	COLOUR (frame + wire system)		CANOPY	MOUNTING TYPE		
LRT	Laurent	06	BLBL	black + black	BL	black	AW	angled wires
			BRBL	brass + black			PW	parallel wires
			BRGD	brass + gold				
			CHBL	chrome + black				
			CHBE	chrome + blue				
			BEBL	blue + black				
			BEBE	blue + blue				
			BUBL	burgundy + black				
			BUSA	burgundy + sand				
			BUBU	burgundy + burgundy				
			TUBL	turquoise + black				
			TUSA	turquoise + sand				

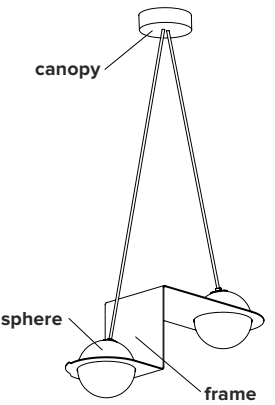

= LRT06BLBLBLAW
example


FRAME COLOUR

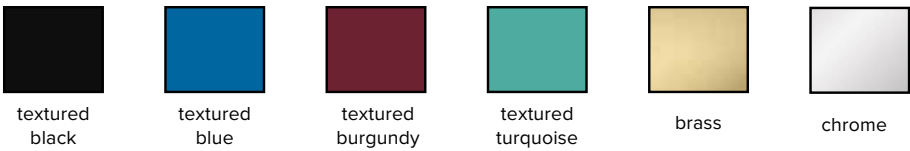


MOUNTING COLOUR
sphere holder & wires



CANOPY COLOR
custom color available on demand




MOUNTING TYPE

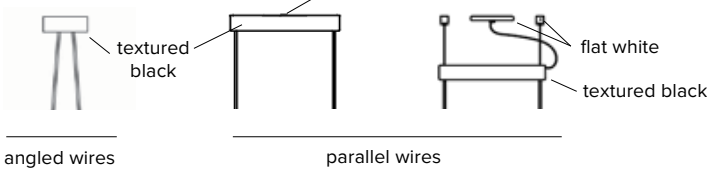


LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good


DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good


*Other dimmers can yield good results and we recommend conducting your own test before final installation.

LAURENT 07

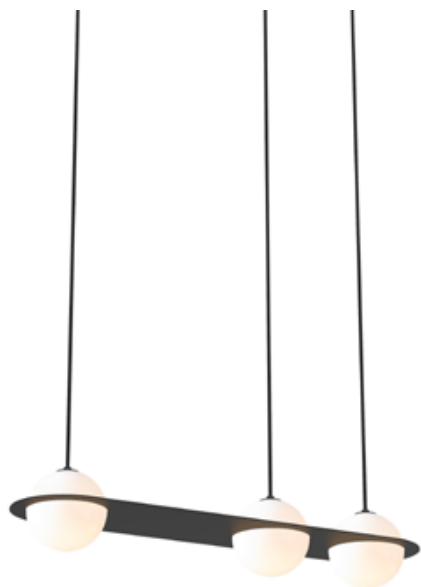


type	suspension	
materials	sphere:	handblown opaline glass
	frame:	polished brass or powder coated aluminum or nickel plated steel
	hardware:	polished brass or powder coated aluminium
	wire:	nylon/polyester
weight	11,5 lb / 5 kg	
light bulb	LED (included), 4,5W (see lightbulb section for specifications)	
sockets	G9	
voltage	120V / 240V	
dimmer	refer to our recommended list of dimmer models	
certifications		
notes	– must be installed by an electrician	
	– additional charges for modifications or for special orders	
	– lead time between 7-9 weeks.	
	– dimensions are approximate and may vary slightly.	


parallel wires

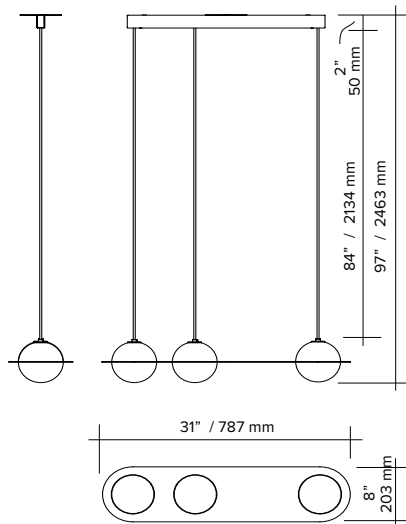

parallel wires with offset connection

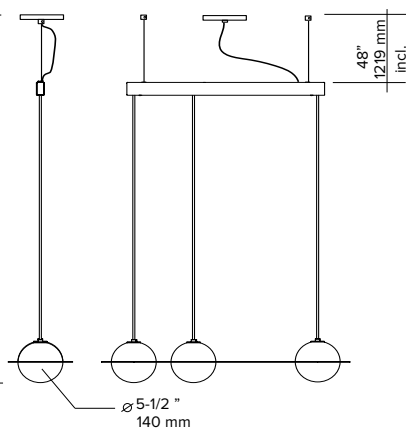

angled wires

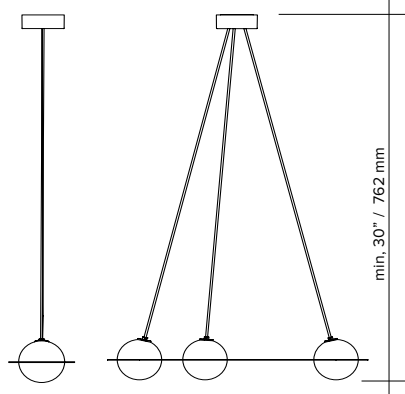

ORDER GUIDE: SKU

COLLECTION		MODEL	COLOUR (frame + wire system)		CANOPY	MOUNTING TYPE		
LRT	Laurent	07	BLBL	black + black	BL	black	AW	angled wires
			BRBL	brass + black			PW	parallel wires
			BRGD	brass + gold				
			CHBL	chrome + black				
			CHBE	chrome + blue				
			BEBL	blue + black				
			BEBE	blue + blue				
			BUBL	burgundy + black				
			BUSA	burgundy + sand				
			BUBU	burgundy + burgundy				
			TUBL	turquoise + black				
			TUSA	turquoise + sand				
LRT		07	BLBL		BL		AW	

canopy

sphere

frame

wire system

wire

sphere holder

= LRT07BLBLBLAW

example

FRAME COLOUR

textured black	textured blue	textured burgundy	textured turquoise	brass	chrome

MOUNTING COLOUR
sphere holder & wires

textured black	textured blue	textured burgundy	textured sand	gold

CANOPY COLOR
custom color available on demand


textured black	flat white

MOUNTING TYPE

angled wires	parallel wires

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good


*Other dimmers can yield good results and we recommend conducting your own test before final installation.

LAURENT 08

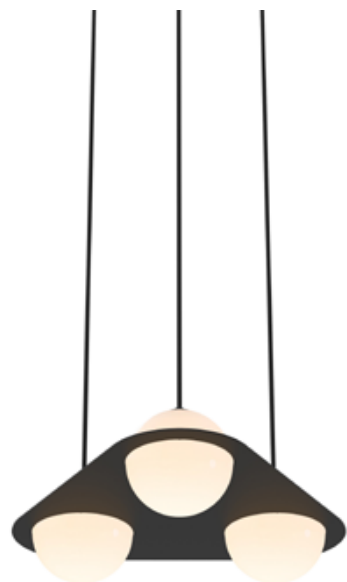


type	suspension
materials	sphere: handblown opaline glass frame: polished brass or powder coated aluminum or nickel plated steel hardware: polished brass or powder coated aluminium wire: nylon/polyester
weight	14 lb / 6 kg
light bulb	LED (included), 4,5W (see lightbulb section for specifications)
sockets	G9
voltage	120V / 240V
dimmer	refer to our recommended list of dimmer models
certifications	
notes	<ul style="list-style-type: none">– must be installed by an electrician– additional charges for modifications or for special orders– lead time between 7-9 weeks.– dimensions are approximate and may vary slightly.


parallel wires

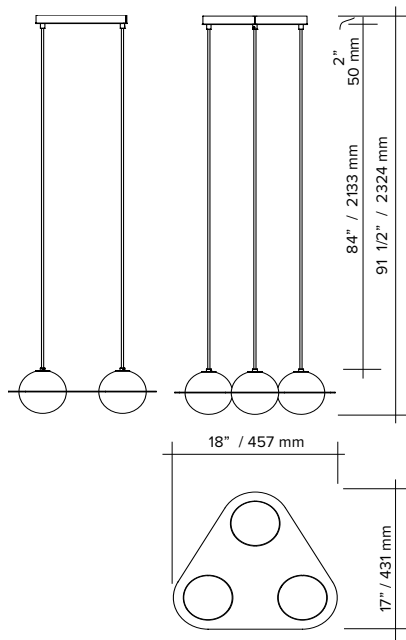

parallel wires with offset connection

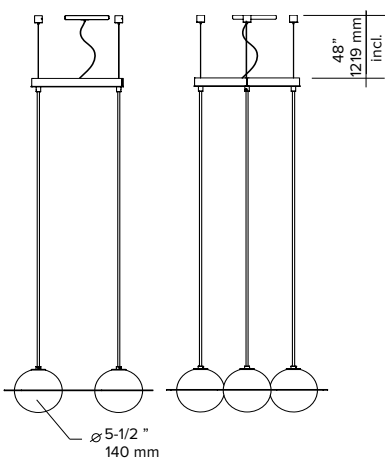

angled wires

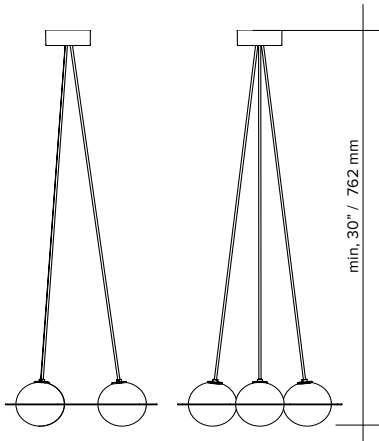

ORDER GUIDE: SKU

COLLECTION		MODEL	COLOUR (frame + wire system)		CANOPY	MOUNTING TYPE		
LRT	Laurent	08	BLBL	black + black	BL	black	AW	angle wire
			BRBL	brass + black			PW	parallel wire
			BRGD	brass + gold				
			CHBL	chrome + black				
			CHBE	chrome + blue				
			BEBL	blue + black				
			BEBE	blue + blue				
			BUBL	burgundy + black				
			BUSA	burgundy + sand				
			BUBU	burgundy + burgundy				
			TUBL	turquoise + black				
			TUSA	turquoise + sand				
LRT		08	BLBL		BL		AW	

canopy

sphere

frame

wire system

wire

sphere holder

= LRT08BLBLBLAW

example

FRAME COLOUR

textured black	textured blue	textured burgundy	textured turquoise	brass	chrome

MOUNTING COLOUR
sphere holder & wires

textured black	textured blue	textured burgundy	textured sand	gold

CANOPY COLOR
custom color available on demand

textured black	flat white

MOUNTING TYPE

angled wires	parallel wires

flat white (ceiling disc)


textured black

flat white


textured black


LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty





DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good


*Other dimmers can yield good results and we recommend conducting your own test before final installation.

LAURENT 09




type	suspension
materials	sphere: handblown opaline glass
	frame: polished brass or powder coated aluminum or nickel plated steel
	hardware: polished brass or powder coated aluminum
	wire: nylon/polyester
weight	9 lb / 4 kg
light bulb	LED (included), 4,5W (see lightbulb section for specifications)
sockets	G9
voltage	120V / 240V
dimmer	refer to our recommended list of dimmer models
certifications	
notes	<ul style="list-style-type: none">- must be installed by an electrician- additional charges for modifications or for special orders- lead time between 7-9 weeks.- dimensions are approximate and may vary slightly.


parallel wires

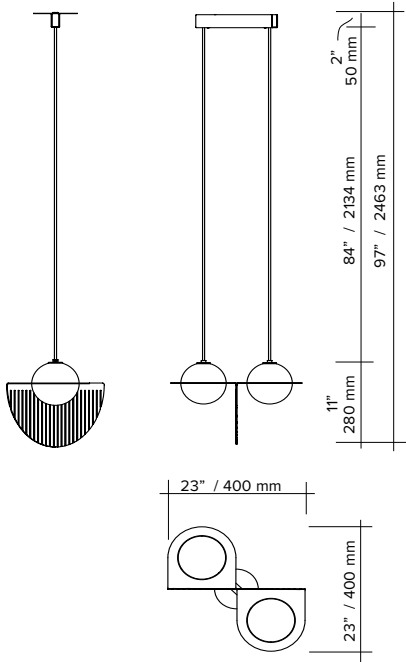

parallel wires with offset connection

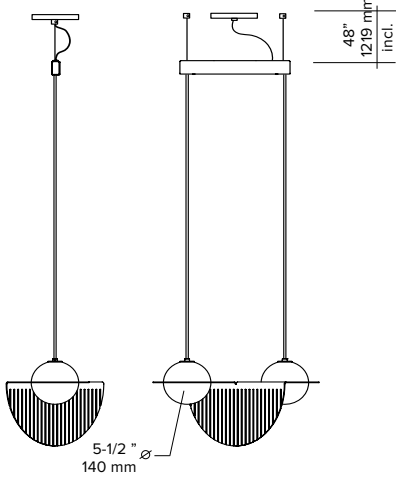

angled wires

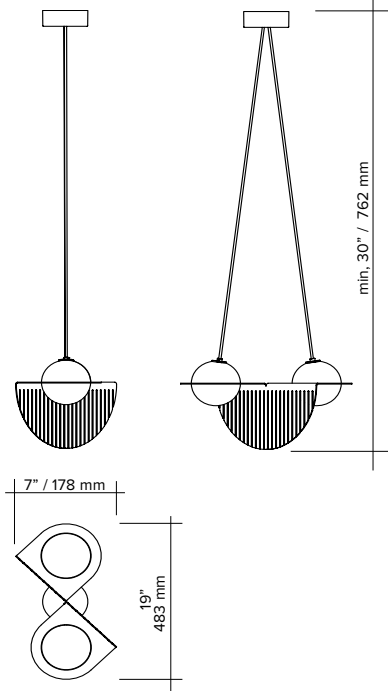

ORDER GUIDE: SKU

COLLECTION		MODEL	COLOUR (frame + wire system)		CANOPY	MOUNTING TYPE		
LRT	Laurent	09	BLBL	black + black	BL	black	AW	angled wires
			BRBL	brass + black			PW	parallel wires
			BRGD	brass + gold				
			CHBL	chrome + black				
			CHBE	chrome + blue				
			BEBL	blue + black				
			BEBE	blue + blue				
			BUBL	burgundy + black				
			BUSA	burgundy + sand				
			BUBU	burgundy + burgundy				
			TUBL	turquoise + black				
			TUSA	turquoise + sand				
LRT		09	BLBL		BL		AW	

canopy

sphere

frame

wire system

wire

sphere holder

= LRT09BLBLBLAW

example

FRAME COLOUR

textured black	textured blue	textured burgundy	textured turquoise	brass	chrome

MOUNTING COLOUR
sphere holder & wires

textured black	textured blue	textured burgundy	textured sand	gold

CANOPY COLOR
custom color available on demand


textured black	flat white

MOUNTING TYPE


angled wires	parallel wires



LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty





DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good


DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V


<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

LAURENT 10




type	suspension	
materials	sphere:	handblown opaline glass
	hardware:	polished brass or powder coated aluminium
	wire:	nylon/polyester
weight	2,5 lb / 1 kg	
light bulb	LED (included), 4,5W (see lightbulb section for specifications)	
sockets	G9	
voltage	120V / 240V	
dimmer	refer to our recommended list of dimmer models	
certifications		
notes	<ul style="list-style-type: none">– must be installed by an electrician– additional charges for modifications or for special orders– lead time between 7 -9 weeks.– dimensions are approximate and may vary slightly.	

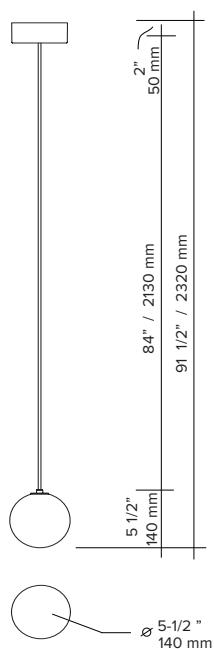

ORDER GUIDE: SKU

COLLECTION		MODEL	COLOUR (wire system)		CANOPY
LRT	Laurent	10	BL	black	BL black
			BE	blue	
			BU	burgundy	
			GD	gold	
			SD	sand	
LRT		10	BL		BL

= LRT10LBLBL
example

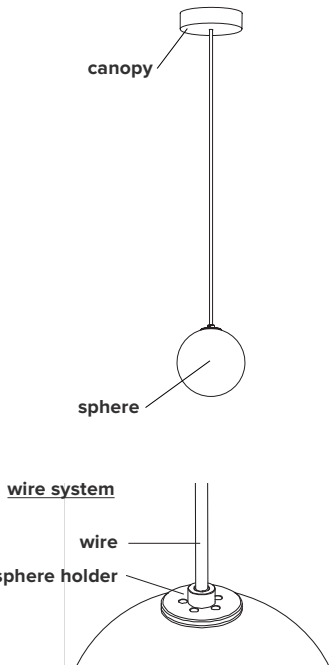

MOUNTING COLOUR
sphere holder & wire



textured
black



textured
blue



textured
burgundy




textured
sand




gold

CANOPY COLOR
custom color available on demand




textured
black



flat white

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
4.5W
100V-120V / 240V
450 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.