








HUTCHISON 01


Hutchison is the thoughtful study of soft curves and hard lines—a rivalry of vertical and horizontal forces and a play of scale and repetition. Alone, it self-defines as a frank, decorative pendant light. In multiples, it evokes the iconic patterns of Middle Eastern archways and Roman terracotta roofs.

type:	suspension
construction:	powder coated or polished aluminum body PMMA frosted diffuser polyester cord
specifications:	source: LED array, integrated power consumption: 10W lumen output: 2700K- 787lm 3000K- 846lm colour rendering index: ≥90 CRI colour consistency: 3 SDCM expected lifetime: ≥50 000h
control:	120/277V on/off, 0-10V or phase dimming (120V only) 220-240V on/off or phase dimming refer to our recommended list of dimmer models
cord length:	108" / 275 cm
weight:	1.7lb / 0.8kg
certifications:	    IP20
warranty:	2 years

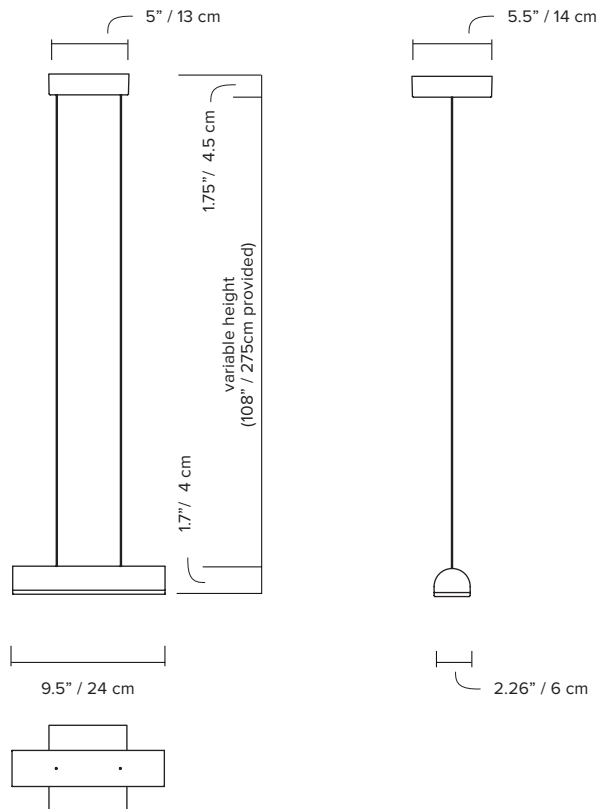

ORDER GUIDE: SKU


COLLECTION	MODEL	BODY	CORD	CANOPY
HUT hutchison	01	BK black	BK black	BK black
		WH white	WH white	WH white
		TC terracota		TC terracota
		BG beige		BG beige
		AL aluminium		
HUT	01	BK	BK	BK

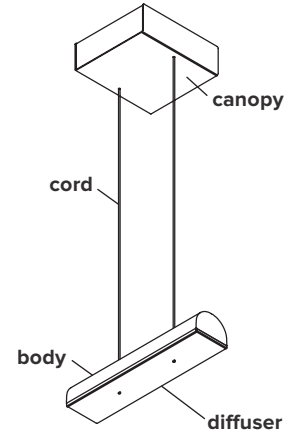


COLOUR TEMPERATURE (CCT)	DIMMING
WL warm light (2700K)	ZT 0-10V dimming
NL neutral light (3000K)	PH phase dimming
D27 dim to warm (2700K-2200K)	
D30 dim to warm (3000K-2200K)	
CCT other CCT available upon request *	
WL	ZT = HUT01BKBKBKWLZT example

* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

FINISH

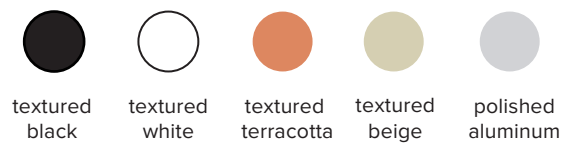


CORD





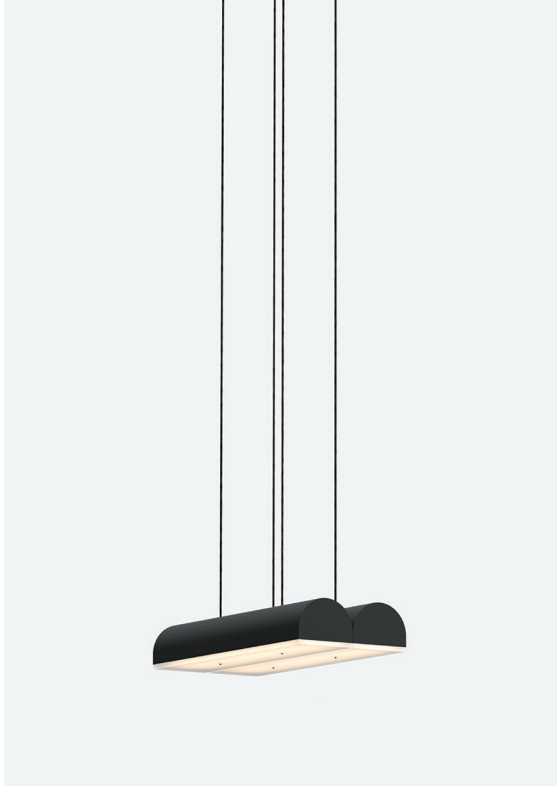

NOTES:


- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- offset option available upon request
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions



HUTCHISON 02


Hutchison is the thoughtful study of soft curves and hard lines—a rivalry of vertical and horizontal forces and a play of scale and repetition. Alone, it self-defines as a frank, decorative pendant light. In multiples, it evokes the iconic patterns of Middle Eastern archways and Roman terracotta roofs.

type:	suspension
construction:	powder coated or polished aluminum body PMMA frosted diffuser polyester cord
specifications:	source: LED array, integrated power consumption: 19W lumen output: 2700K- 1546lm 3000K- 1663lm colour rendering index: ≥90 CRI colour consistency: 3 SDCM expected lifetime: ≥50 000h
control:	120/277V on/off, 0-10V or phase dimming (120V only) 220-240V on/off or phase dimming refer to our recommended list of dimmer models
cord length:	108" / 275 cm
weight:	3.4lb / 1.6kg
certifications:	    IP20
warranty:	2 years

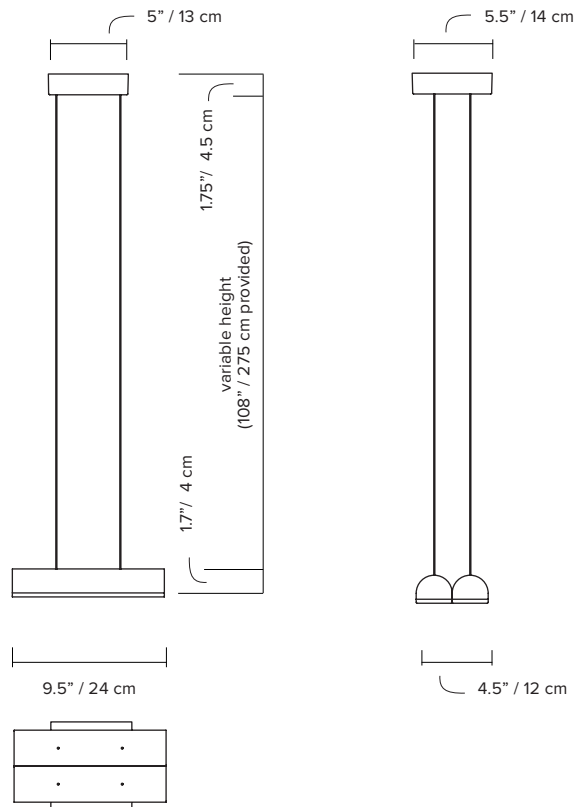

ORDER GUIDE: SKU


COLLECTION	MODEL	BODY	CORD	CANOPY
HUT hutchison	02	BK black WH white TC terracota BG beige AL aluminium	BK black WH white	BK black WH white TC terracota BG beige
HUT	02	BK	BK	BK

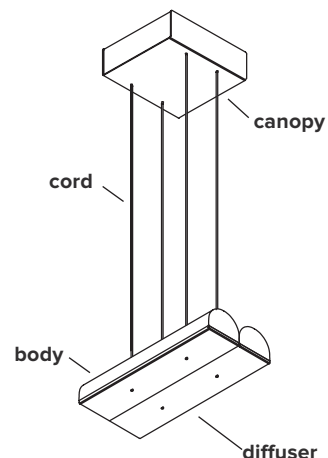


COLOUR TEMPERATURE (CCT)	DIMMING
WL warm light (2700K)	ZT 0-10V dimming
NL neutral light (3000K)	PH phase dimming
D27 dim to warm (2700K- 2200K)	
D30 dim to warm (3000K - 2200K)	
CCT other CCT available upon request *	
WL	ZT = HUT02BKBKBLWLZT
	example

* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

FINISH

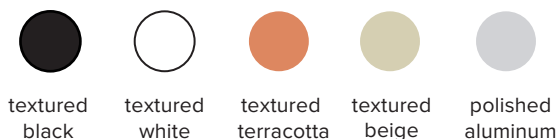


CORD





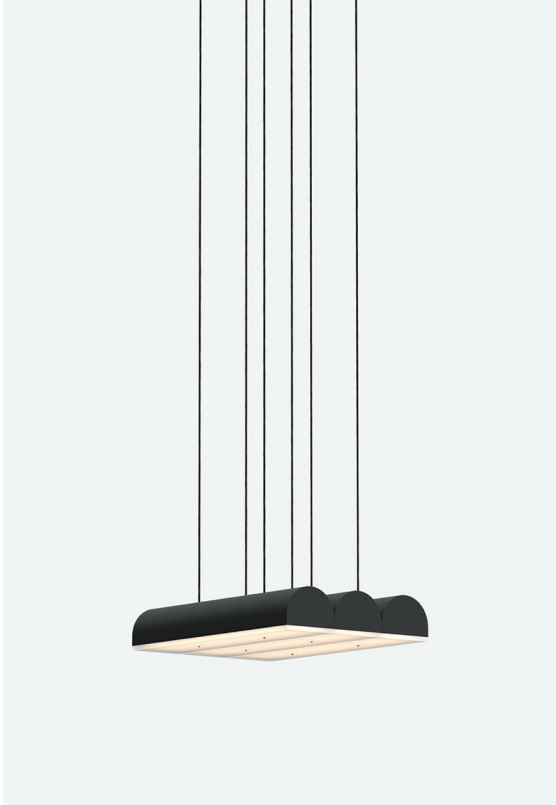

NOTES:


- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- offset option available upon request
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions



HUTCHISON 03


Hutchison is the thoughtful study of soft curves and hard lines—a rivalry of vertical and horizontal forces and a play of scale and repetition. Alone, it self-defines as a frank, decorative pendant light. In multiples, it evokes the iconic patterns of Middle Eastern archways and Roman terracotta roofs.

- type:** suspension
- construction:** powder coated or polished aluminum body
PMMA frosted diffuser
polyester cord
- specifications:** source: LED array, integrated
power consumption: 26W
lumen output: 2700K- 2143lm
3000K- 2305lm
colour rendering index: ≥90 CRI
colour consistency: 3 SDCM
expected lifetime: ≥50 000h
- control:** 120/277V on/off, 0-10V or phase dimming (120V only)
220-240V on/off or phase dimming
refer to our recommended list of dimmer models
- cord length:** 108" / 275 cm
- weight:** 5.1 lb / 2.4kg
- certifications:**     IP20
- warranty:** 2 years

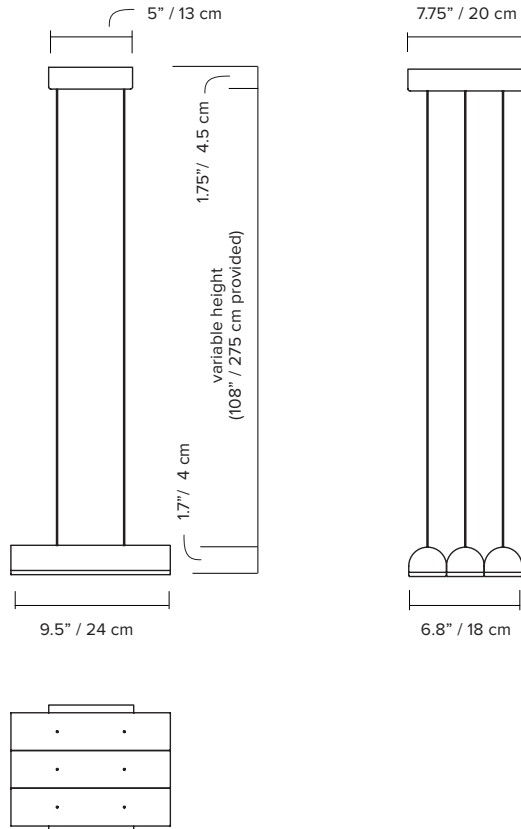


ORDER GUIDE: SKU

COLLECTION	MODEL	BODY	CORD	CANOPY
HUT hutchison	03	BK black WH white TC terracota BG beige AL aluminium	BK black WH white	BK black WH white TC terracota BG beige
HUT	03	BK	BK	BK

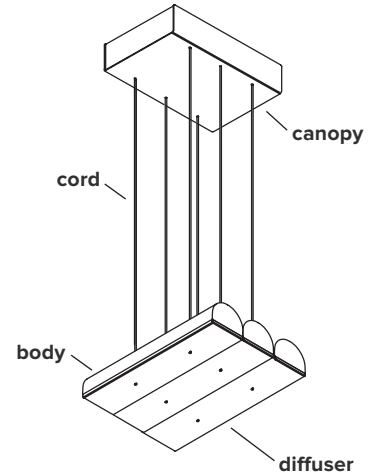


COLOUR TEMPERATURE (CCT)	DIMMING
WL warm light (2700K)	ZT 0-10V dimming
NL neutral light (3000K)	PH phase dimming
D27 dim to warm (2700K - 2200K)	
D30 dim to warm (3000K - 2200K)	
CCT other CCT available upon request *	
WL	ZT = HUT03BKBKWLZT example

* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

FINISH	CORD
    	 
textured black textured white textured terracotta textured beige polished aluminum	black white



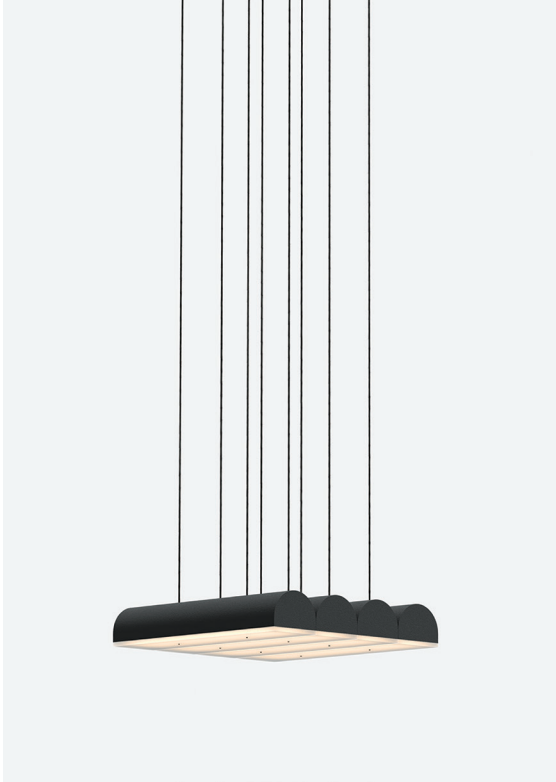

NOTES:




- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- offset option available upon request
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions



HUTCHISON 04


Hutchison is the thoughtful study of soft curves and hard lines—a rivalry of vertical and horizontal forces and a play of scale and repetition. Alone, it self-defines as a frank, decorative pendant light. In multiples, it evokes the iconic patterns of Middle Eastern archways and Roman terracotta roofs.

- type:** suspension
- construction:** powder coated or polished aluminum body
PMMA frosted diffuser
polyester cord
- specifications:** source: LED array, integrated
power consumption: 32W
lumen output: 2700K- 2619lm
3000K- 2817lm
colour rendering index: ≥ 90 CRI
colour consistency: 3 SDCM
expected lifetime: $\geq 50\ 000$ h
- control:** 120/277V on/off, 0-10V or phase dimming (120V only)
220-240V on/off or phase dimming
refer to our recommended list of dimmer models
- cord length:** 108" / 275 cm
- weight:** 6.8lb / 3.2kg
- certifications:**     IP20
- warranty:** 2 years

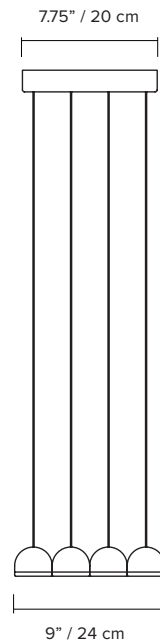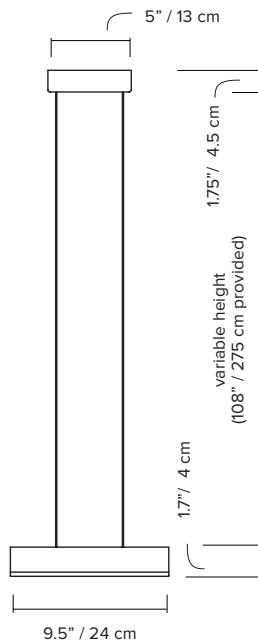



ORDER GUIDE: SKU

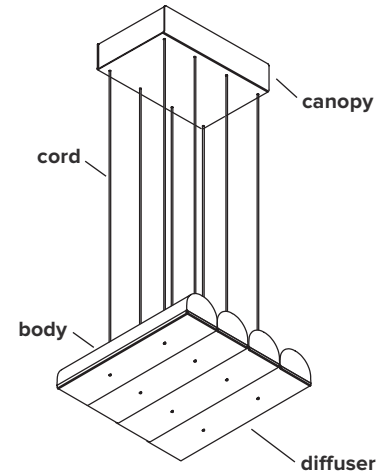COLLECTION	MODEL	BODY	CORD	CANOPY
HUT hutchison	04	BK black	BK black	BK black
		WH white	WH white	WH white
		TC terracota		TC terracota
		BG beige		BG beige
		AL aluminium		
HUT	04	BK	BK	BK



COLOUR TEMPERATURE (CCT)	DIMMING
WL warm light (2700K)	ZT 0-10V dimming
NL neutral light (3000K)	PH phase dimming
D27 dim to warm (2700K to 2200K)	
D30 dim to warm (3000K to 2200K)	
CCT other CCT available upon request *	
WL	ZT = HUT04BK BK BK WL ZT
	example

* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

FINISH	CORD
    	 
textured black textured white textured terracotta textured beige polished aluminum	black white

NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- offset option available upon request
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions