



Hutchison is the thoughtful study of soft curves and hard lines—a rivalry of vertical and horizontal forces and a play of scale and repetition. Alone, it self-defines as a frank, decorative pendant light. In multiples, it evokes the iconic patterns of Middle Eastern archways and Roman terracotta roofs


ТҮРЕ	Suspension
CONSTRUCTION	Powder coated or polished aluminum body PMMA frosted diffuser Polyester cord
SPECIFICATIONS	Source: LED array, integrated Power consumption: 7.7W Lumen output: 3000K - 625Im 2700K - 568Im
	Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
CONTROL	120/277V on/off, 0-10V, or phase dimming (120V only) 220-240V: On/Off, Phase Dimming
CORD LENGTH	108" / 275 cm
WEIGHT	1.7lbs / 0.8Kg
CERTIFICATIONS	الله (E الله المراجع الله الله الله الله الله الله الله الل
WARRANTY	2 years

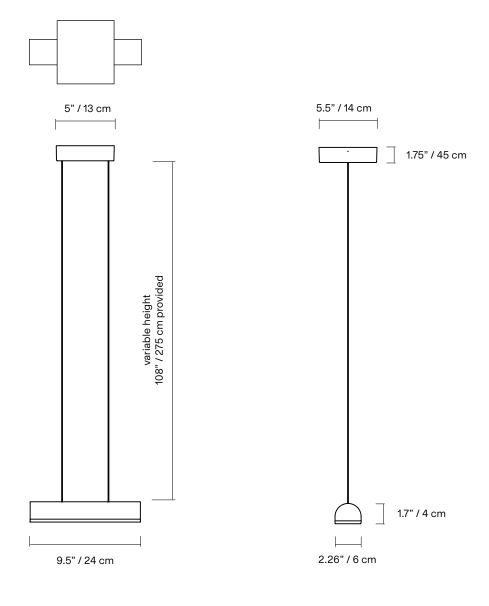


*dimensions are approximate and may vary slightly

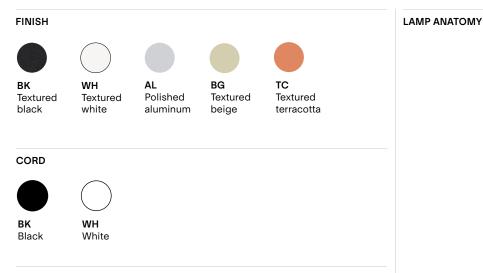

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Offset option available upon request
 Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions





3

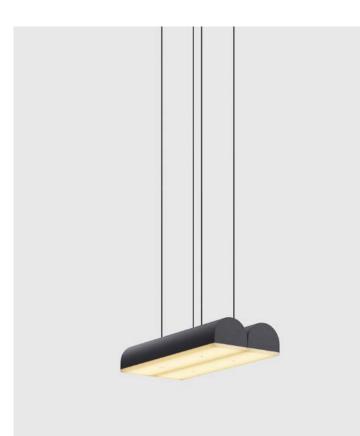

Hutchison is the thoughtful study of soft curves and hard lines—a rivalry of vertical and horizontal forces and a play of scale and repetition. Alone, it self-defines as a frank, decorative pendant light. In multiples, it evokes the iconic patterns of Middle Eastern archways and Roman terracotta roofs


ТҮРЕ	Suspension
CONSTRUCTION	Powder coated or polished aluminum body PMMA frosted diffuser Polyester cord
SPECIFICATIONS	Source: LED array, integrated Power consumption: 10.7W Lumen output: 3000K - 8511m 2700K - 7741m
	Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
CONTROL	120/277V on/off, 0-10V, or phase dimming (120V only) 220-240V: On/Off, Phase Dimming
CORD LENGTH	108" / 275 cm
WEIGHT	3.4lbs / 1.6Kg
CERTIFICATIONS	
WARRANTY	2 years

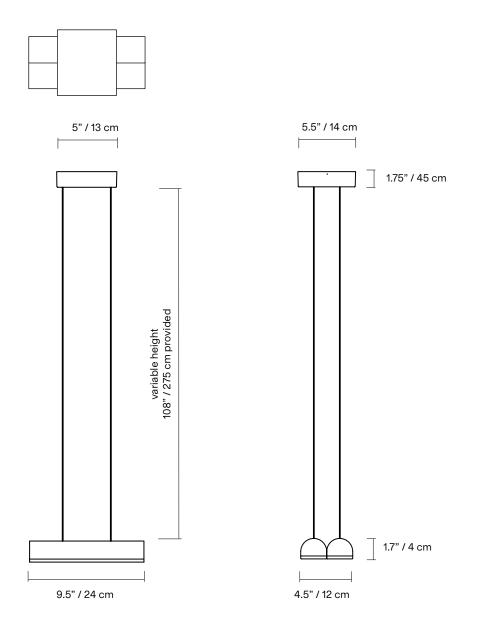

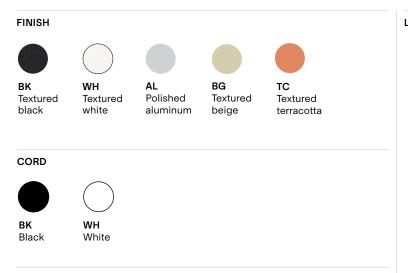

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Offset option available upon request
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions



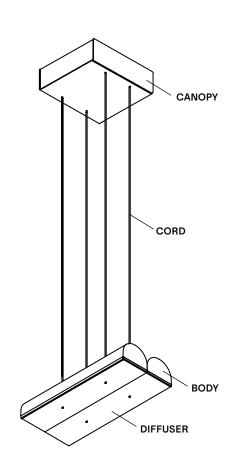



Hutchison is the thoughtful study of soft curves and hard lines—a rivalry of vertical and horizontal forces and a play of scale and repetition. Alone, it self-defines as a frank, decorative pendant light. In multiples, it evokes the iconic patterns of Middle Eastern archways and Roman terracotta roofs


ТҮРЕ	Suspension
CONSTRUCTION	Powder coated or polished aluminum body PMMA frosted diffuser Polyester cord
SPECIFICATIONS	Source: LED array, integrated Power consumption: 15W Lumen output: 3000K - 1180Im 2700K - 1073Im
	Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
CONTROL	120/277V on/off, 0-10V, or phase dimming (120V only) 220-240V: On/Off, Phase Dimming
CORD LENGTH	108" / 275 cm
WEIGHT	5.1lbs / 2.4Kg
CERTIFICATIONS	الله CE ۲۲ سر IP20
WARRANTY	2 years

7.75" / 20 cm 5" / 13 cm ł 1.75" / 45 cm variable height 108" / 275 cm provided 1.7" / 4 cm 9.5" / 24 cm 6.8" / 18 cm

*dimensions are approximate and may vary slightly


lambert&fils

2

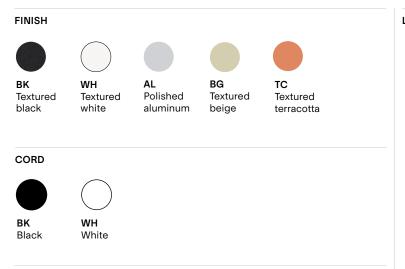

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Offset option available upon request
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions


LAMP ANATOMY

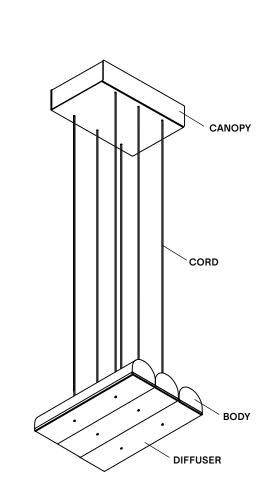




Hutchison is the thoughtful study of soft curves and hard lines—a rivalry of vertical and horizontal forces and a play of scale and repetition. Alone, it self-defines as a frank, decorative pendant light. In multiples, it evokes the iconic patterns of Middle Eastern archways and Roman terracotta roofs

ТҮРЕ	Suspension
CONSTRUCTION	Powder coated or polished aluminum body PMMA frosted diffuser Polyester cord
SPECIFICATIONS	Source: LED array, integrated Power consumption: 21W Lumen output: 3000K - 1602Im 2700K - 1457Im
	Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
CONTROL	120/277V on/off, 0-10V, or phase dimming (120V only) 220-240V: On/Off, Phase Dimming
CORD LENGTH	108" / 275 cm
WEIGHT	6.8lbs / 3.2Kg
CERTIFICATIONS	
WARRANTY	2 years

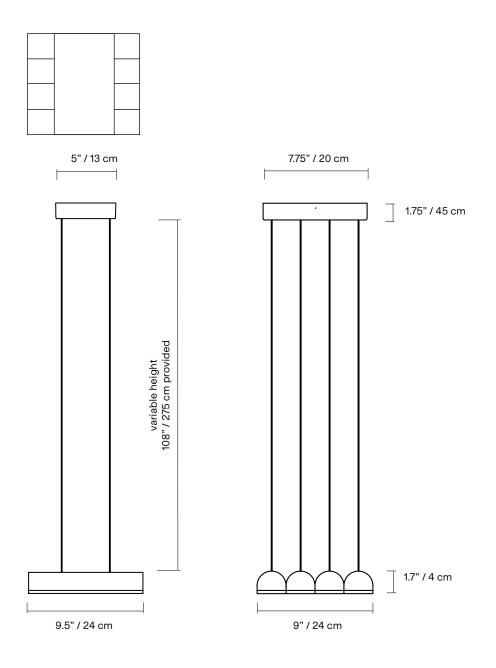

*dimensions are approximate and may vary slightly

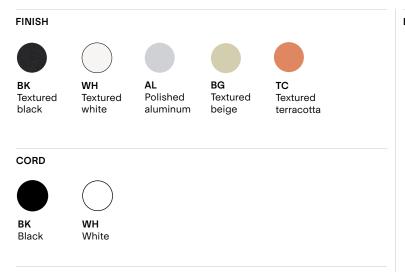

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Offset option available upon request - Additional charges for modifications or for special orders

