

Ipoli 04




Ipoli is a decorative multifunctional collection centered on the movement of playful swiveling heads atop a slender base. The collection draws inspiration from the design tradition of utilitarian, streamlined task lamps and office lighting, while enfolding Lambert & Fils' unique twist, both poetic and sturdy. Whether employed as a task light, ambient accent, or focal point, each piece will delight any space.

TYPE	Suspension
CONSTRUCTION	Tumbled or powder coated aluminum body, head and cover plate Frosted opal acrylic lens
SPECIFICATIONS	Power consumption Touch dimmer: 8W Remote driver: max. 7W Colour temperature: 3000K 2700K 2200K dim to warm 3000K to 2200K dim to warm 2700K to 2200K Lumen output: Touch dimmer 2700K - 215lm 2200K - 200lm Remote driver 2700K - 245lm 2200K - 230lm Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
CONTROL	Touch Dimmer: 120/277V touch dimmer only 220-240V touch dimmer only Remote Driver 120/277V on/off, 0-10V, or phase dimming (120V only) 220-240V: On/Off, Phase Dimming, DALI Driver does not fit in a standard octagonal jbox
TOTAL HEIGHT	A 25.8" B 31.8" C 37.8" D 43.8" E 49.8" F 55.8" 66 cm 81 cm 96 cm 111 cm 127 cm 142 cm
WEIGHT	2.5lb / 1.1kg min.
CERTIFICATIONS	     IP20
WARRANTY	2 years

NOTES

- Luminaire height is not adjustable on site.
Min - 8.5" / 21.6 cm (total height under 25.8" / 65.6 cm choose variable in order guide)
- Luminaire can not be installed on slanted ceiling
- Dimensions are approximate and may vary slightly
- **Touch Dimmer:** Do not install on a dimmer switch. Must be installed on an ON/OFF switch only. (Touch only)
- **Remote Driver:** Touch dimmer not available. Driver provided. Driver housing not included for UL. Driver does not fit in a standard octagonal jbox.

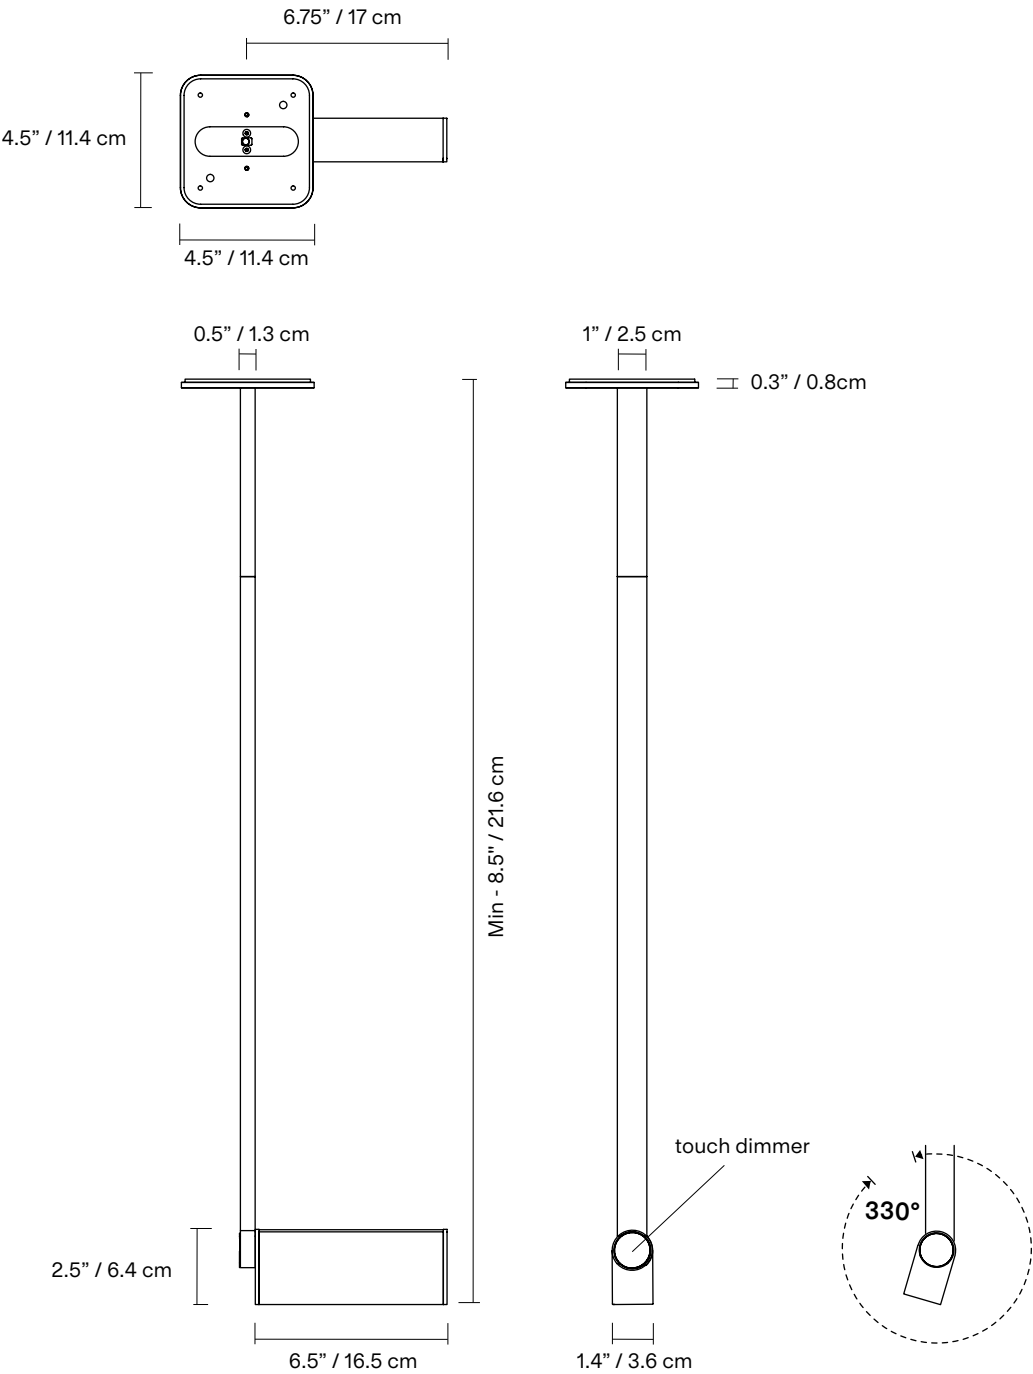

FINISH



BG
Textured
beige



BK
Textured
black



PP
Textured
poppy




TA
Tumbled
aluminum

NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

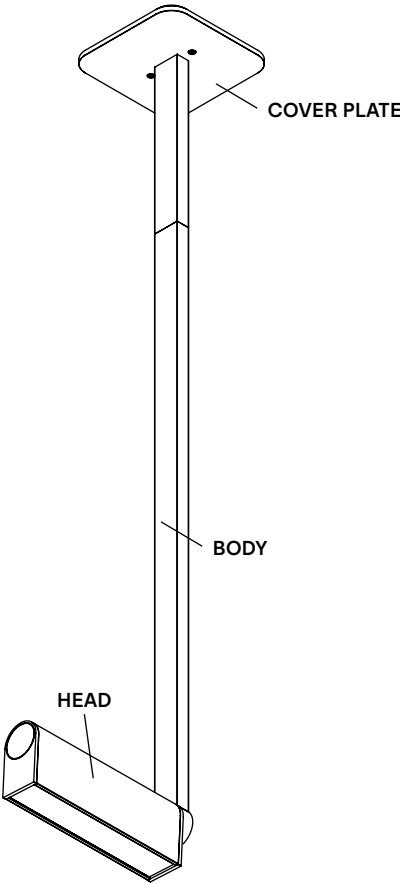

TOUCH DIMMER


Do not install on a dimmer switch.
Must be installed on an ON/OFF switch only.

		Example	Fill with your selection
COLLECTION	IPO Ipoli	IPO	IPO
MODEL	04	04	04
CONFIGURATION	TO Touch Dimmer	TO	TO
FINISH	BG Textured beige BK Textured black PP Textured poppy TA Tumbled aluminum CC Custom colour*	BG	
TOTAL HEIGHT	A 25.8" / 65.6 cm B 31.8" / 80.9 cm C 37.8" / 96.1 cm D 43.8" / 111.4 cm E 49.8" / 126.6 cm F 55.8" / 141.8 cm V Variable	A	
COLOUR TEMPERATURE (CCT)	F22 Fixed 2200K F27 Fixed 2700K	F22	
FULL SKU		IPO04TOBGAF22	

NOTES

*Custom colour available upon request. Material library on website.

HARDWIRE INSTALLATION

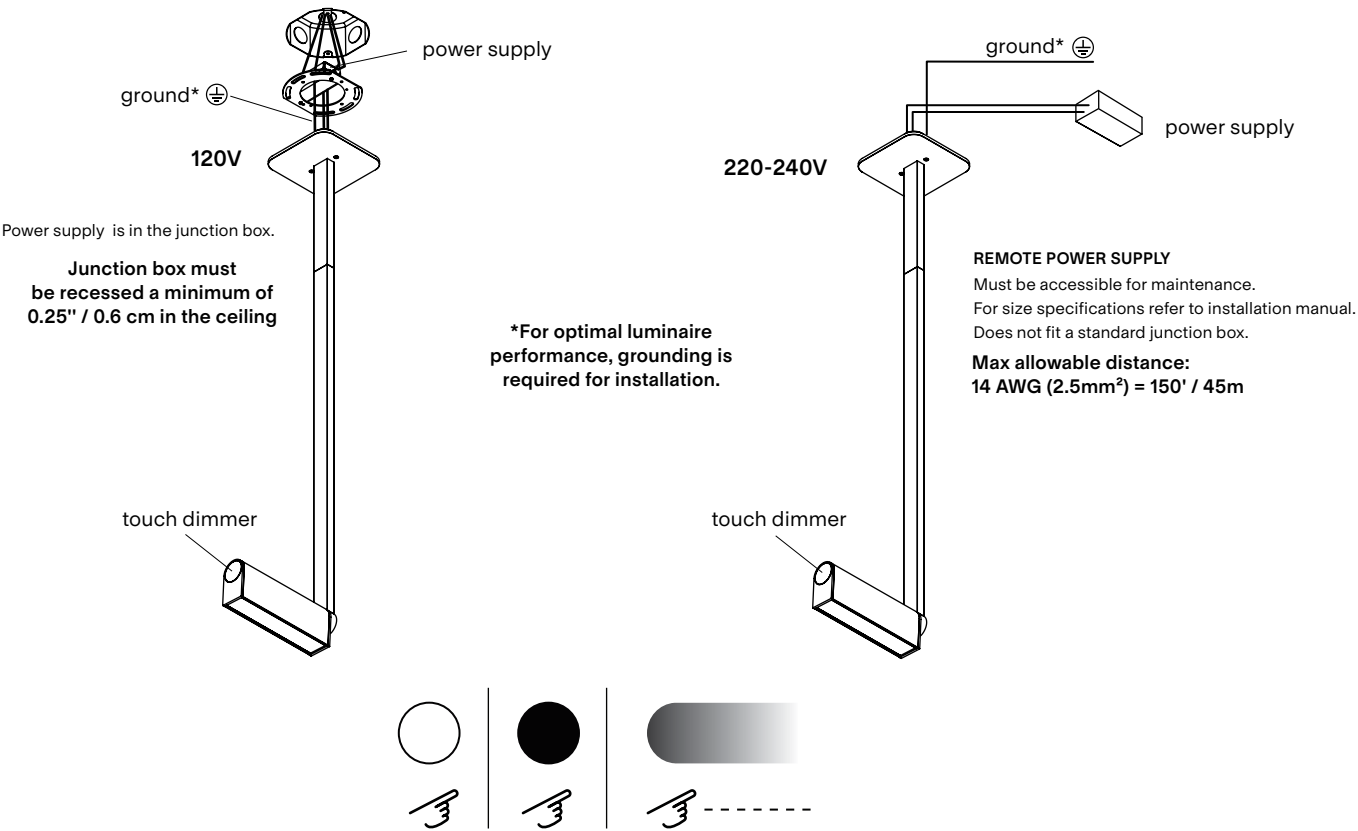


REMOTE DRIVER

Driver provided. Driver housing not included for UL.

		Example	Fill with your selection
COLLECTION	IPO Ipoli	IPO	IPO
MODEL	04	04	04
CONFIGURATION	RM Remote Driver	RM	RM
FINISH	BG Textured beige BK Textured black PP Textured poppy TA Tumbled aluminum CC Custom colour*	BG	
TOTAL HEIGHT	A 25.8" / 65.6 cm B 31.8" / 80.9 cm C 37.8" / 96.1 cm D 43.8" / 111.4 cm E 49.8" / 126.6 cm F 55.8" / 141.8 cm V Variable	A	
COLOUR TEMPERATURE (CCT)	F22 Fixed 2200K F27 Fixed 2700K F30 Fixed 3000K D27 Dim to warm 2700K-2200K D30 Dim to warm 3000K-2200K CCT Other CCT available upon request**	F22	
DIMMING	ZT 0-10V (120VAC only) PH Phase dimming DA DALI (220-240VAC only)	ZT	
FULL SKU		IPO04RMBGAF22ZT	
NOTES			

*Custom colour available upon request. Material library on website.
**Specific CCT selection only available in 100k increments, from 2200K to 4000K
inclusively and not available with Dim-to-Warm feature.

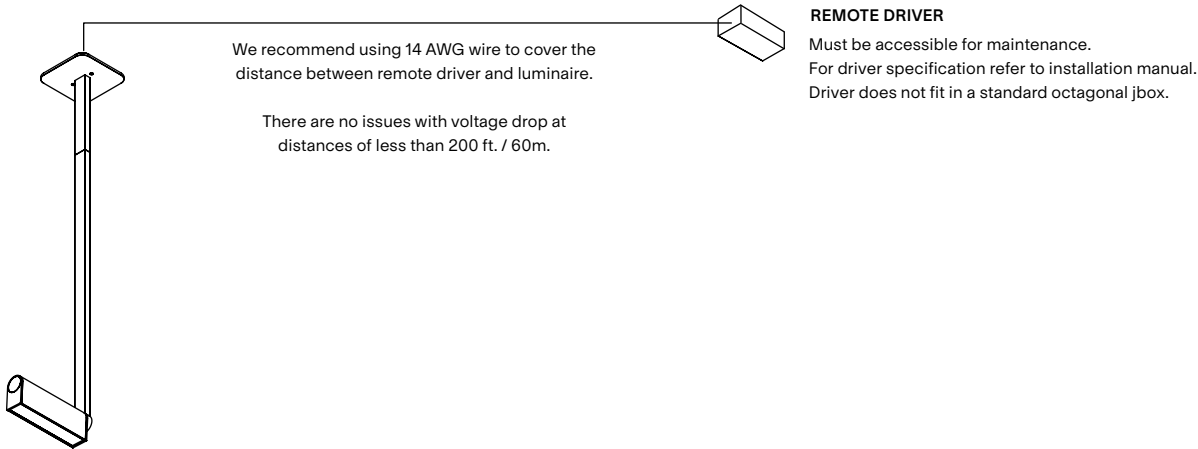

TESTED DIMMER COMPATIBILITY LIST - 120V (REMOTE DRIVER ONLY)

Compatible with ELV dimming (Trailing Edge / Reverse Phase).
We strongly recommend using dimmers that require a Neutral wire connection.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
Lutron	DVELV-300P	95%	5%	Phase Cut
Lutron	DVELV-303P	95%	5%	Phase Cut
Lutron	CTELV-303P	93%	4%	Phase Cut
Lutron	SELV-300P	97%	3%	Phase Cut
Lutron	SELV-303P	97%	3%	Phase Cut
Lutron	MA-PRO / companion (MA-R-WH)	99%	2%	Phase Cut
Lutron	PD-5NE	100%	5%	Phase Cut
Lutron	PD-6WCL	100%	5%	Phase Cut
Lutron	DVRP-253P	94%	3%	Phase Cut
Lutron	CTRP-253P	90%	2%	Phase Cut
Lutron	NTELV-300	94%	2%	Phase Cut

Some dimmers require a minimum load, check specifications.

We recommend conducting your own test before final installation.