Ipoli 04




Ipoli is a decorative multifunctional collection centered on the movement of playful swiveling heads atop a slender base. The collection draws inspiration from the design tradition of utilitarian, streamlined task lamps and office lighting, while enfolding Lambert & Fils' unique twist, both poetic and sturdy. Whether employed as a task light, ambient accent, or focal point, each piece will delight any space.

TYPE	Suspension				
CONSTRUCTION	Tumbled or powder coated aluminum body, head and cover plate Frosted opal acrylic lens				
SPECIFICATIONS	Power consumption Touch dimmer: 8W Remote driver: max. 7W				
	Colour temperature: 3000K 2700K 2200K 2200K dim to warm 3000K to 2200K dim to warm 2700K to 2200K				
	Lumen output: TBD				
	Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h				
CONTROL	Touch Dimmer: 120/277V touch dimmer only 220-240V touch dimmer only Remote Driver 120/277V on/off, 0-10V, or phase dimming (120V only) 220-240V: On/Off, Phase Dimming, DALI				
TOTAL HEIGHT	A 25.8" B 31.8" C 37.8" D 43.8" E 49.8" F 55.8' 66 cm 81 cm 96 cm 1111 cm 127 cm 142 cm				
WEIGHT	2.5lb / 1.1kg min.				
CERTIFICATIONS	«∰» ĽK C€ √KoHS ፟ IP20				
WARRANTY	2 years				

NOTES

- Luminaire height is not adjustable on site. Min - 25.8" / 65.5 cm
- Luminaire can not be installed on slanted ceiling
- Dimensions are approximate and may vary slightly
- Touch Dimmer: Do not install on a dimmer switch. Must be installed on an ON/OFF switch only. (Touch only)
- Remote Driver: Touch dimmer not available. Driver provided. Driver housing not included for UL.

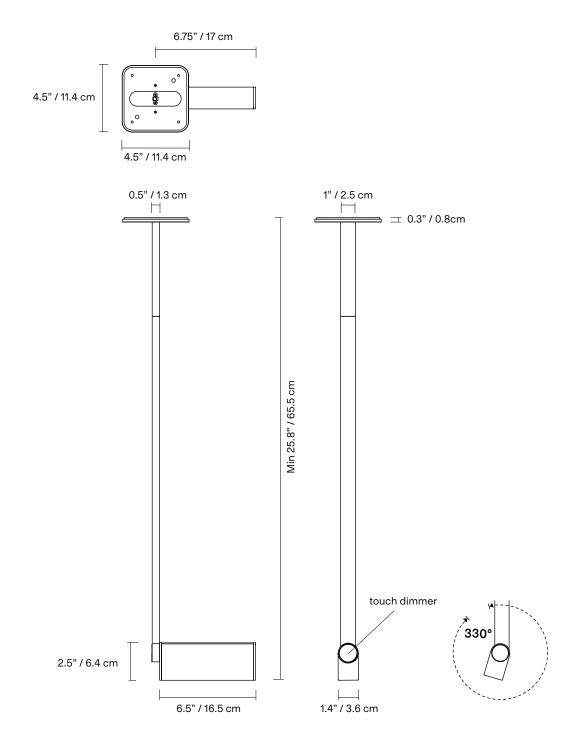

FINISH







black






Textured Tumbled poppy aluminum

NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
 Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

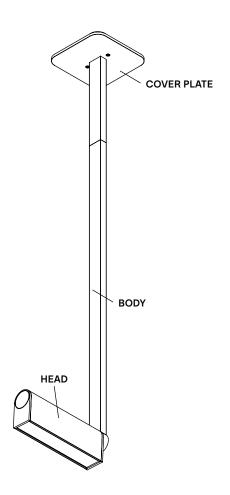


TOUCH DIMMER

Do not install on a dimmer switch. Must be installed on an ON/OFF switch only.

		Example	Fill with your selection
COLLECTION	IPO Ipoli	IPO	IPO
MODEL	04	04	04
CONFIGURATION	TO Touch Dimmer	ТО	то
FINISH	BG Textured beige BK Textured black PP Textured poppy TA Tumbled aluminum CC Custom colour*	BG	
TOTAL HEIGHT	A 25.8" / 65.6 cm B 31.8" / 80.9 cm C 37.8" / 96.1 cm D 43.8" / 111.4 cm E 49.8" / 126.6 cm F 55.8" / 141.8 cm V Variable	A	
COLOUR TEMPERATURE (CCT)	F22 Fixed 2200K F27 Fixed 2700K	F22	
FULL SKU		IPO04TOBGAF22	
		NOTES	

^{*}Custom colour available upon request. Material library on website.

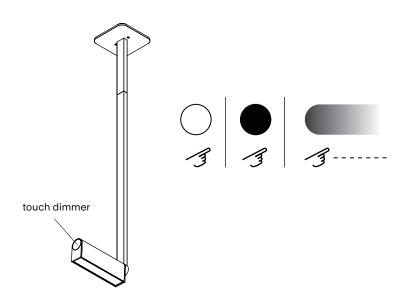


REMOTE DRIVER

Driver provided. Driver housing not included for UL.

		Example	Fill with your selection
COLLECTION	IPO Ipoli	IPO	IPO
MODEL	04	04	04
CONFIGURATION	RM Remote Driver	RM	RM
FINISH	BG Textured beige BK Textured black PP Textured poppy TA Tumbled aluminum CC Custom colour*	BG	
TOTAL HEIGHT	A 25.8" / 65.6 cm B 31.8" / 80.9 cm C 37.8" / 96.1 cm D 43.8" / 111.4 cm E 49.8" / 126.6 cm F 55.8" / 141.8 cm V Variable	A	
COLOUR TEMPERATURE (CCT)	F22 Fixed 2200K F27 Fixed 2700K F30 Fixed 3000K D27 Dim to warm 2700K-2200K D30 Dim to warm 3000K-2200K CCT Other CCT available upon request*	F22	
DIMMING	ZT 0-10V (120VAC only) PH Phase dimming DA DALI (220-240VAC only)	ZT	
FULL SKU		IPO04RMBGAF22ZT	
		NOTES	

NOTES

^{**}Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.

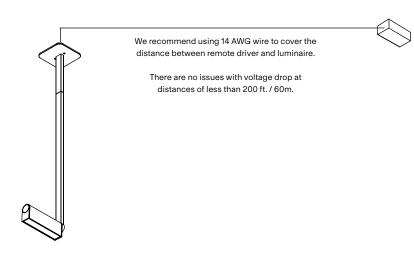

REMOTE DRIVER

Must be accessible for maintenance.

For driver specification refer to installation manual.

^{*}Custom colour available upon request. Material library on website.