

FRAME
Painted steel


SEAT AND BACKREST
Polyurethane with fabric upholstery

6245
Curly/Orsetto fabric
I6245 🔥




★ version always in stock - other than in the case of unforeseen events beyond Kartell's control


6246
Antibes fabric
I6246 🔥

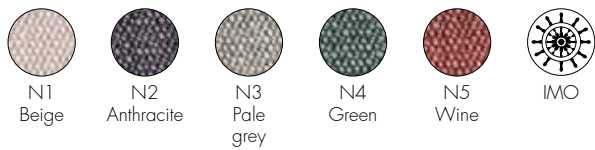

Fire-resistant version
CURLY/ORSETTO - UK standard BS 5852:1979 Part 1 - Source 1
ANTIBES - UK standard BS 5852:1979 Part 1 - Source 1
IT UNI 9175, EN1021 Class 1IM MI1848D20D1IM00031



6245/I6245 1 33.5 0.627 88X88X81
6246/I6246 1 33.5 0.627 88X88X81



FRAME
Painted steel


SEAT AND BACKREST
Polyurethane with fabric upholstery

6247
Curly/Orsetto fabric
I6247 🔥




★ version always in stock - other than in the case of unforeseen events beyond Kartell's control

6248
Antibes fabric
I6248 🔥

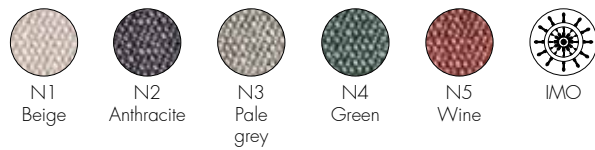

Fire-resistant version
CURLY/ORSETTO - UK standard BS 5852:1979 Part 1 - Source 1
ANTIBES - UK standard BS 5852:1979 Part 1 - Source 1
IT UNI 9175, EN1021 Class 1IM MI1848D20D1IM00031




6247/I6247 1 74.0 1.824 206X108X82
6248/I6248 1 74.0 1.824 206X108X82



EN 1022:2005	Compliant
EN 1728:2012+AC2013	Level achieved
6.6	(maximum level) L2
6.10	(maximum level) L2
6.11	(maximum level) L2
6.15	(maximum level) L2
6.16	(maximum level) L2
6.17	(maximum level) L2
6.18	(maximum level) L2
6.20	(maximum level) L2
6.25	(maximum level) L2
6.26	(maximum level) L2


EN 1022:2005	Compliant
EN 1728:2012+AC2013	Level achieved
6.6	(maximum level) L2
6.10	(maximum level) L2
6.11	(maximum level) L2
6.15	(maximum level) L2
6.16	(maximum level) L2
6.17	(maximum level) L2
6.18	(maximum level) L2
6.20	(maximum level) L2
6.25	(maximum level) L2
6.26	(maximum level) L2



FRAME
Painted steel


SEAT
Polyurethane with fabric upholstery

6249
Curly/Orsetto fabric
16249

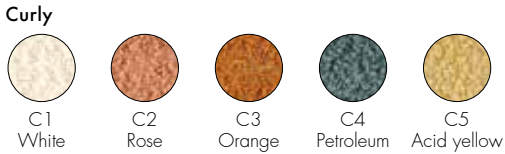


★ version always in stock - other than in the case of unforeseen events beyond Kartell's control

6250
Antibes fabric
16250

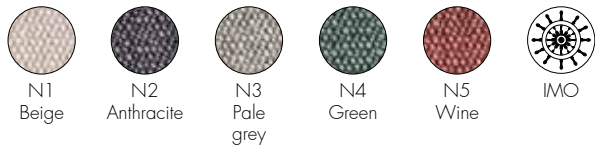


Fire-resistant version
CURLY/ORSETTO - UK standard BS 5852:1979 Part 1 - Source 1
ANTIBES - UK standard BS 5852:1979 Part 1 - Source 1
IT UNI 9175, EN1021 Class 11M MI1848D20D1IM00031

6249/16249	1	14.0	0.182	65X65X43
6250/16250	1	14.0	0.182	65X65X43




MATERIAL
Goose down and flock cushions

7177
Curly/Orsetto fabric

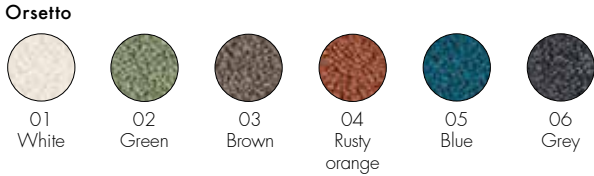

★ version always in stock - other than in the case of unforeseen events beyond Kartell's control

7178
Antibes fabric

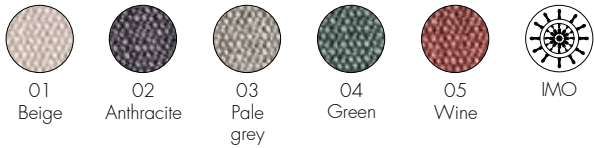

7177/7178	1	1.3	0.039	51X51X15



EN 1022:2005	Compliant
EN 1728:2012+AC2013	Level achieved
6.4	(maximum level) L2
6.5	(maximum level) L2
6.15	(maximum level) L2
6.16	(maximum level) L2
6.18	(maximum level) L2
6.24	(maximum level) L2