lambert&fils

LAURENT 05



suspension type

sphere: handblown opaline glass materials frame: polished brass (BR) or

powder coated aluminum (Colors) or nickel plated steel (CH)

hardware: polished brass

or powder coated aluminium

nylon/polyester wire:

weight 9 lb / 4 kg

LED (included), 4,5W light bulb

(see lightbulb section for specifications)

sockets G9

voltage 120V / 240V

dimmer refer to our recommended list of dimmer models

certifications -<u>@</u>-- C € ⊕


- must be installed by an electrician notes

- additional charges for modifications or for special


orders

lead time between 7-9 weeks.dimensions are approximate and may vary slightly.


parallel wires



parallel wires with offset connection




angled wires




lambert&fils

ORDER GUIDE: SKU

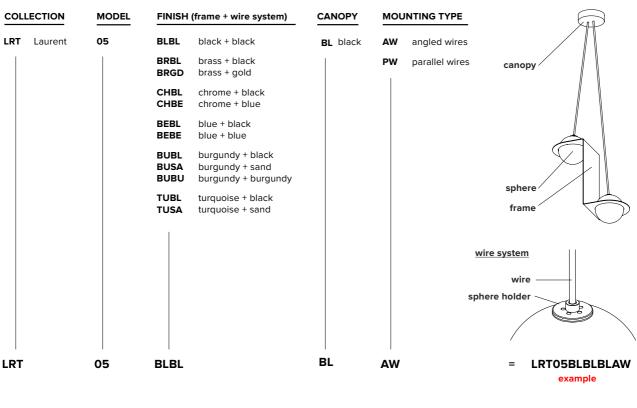

FRAME FINISH





lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty





DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic $\ \ \,$ low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.