## lambert&fils

## **LAURENT 06**



type suspension

handblown opaline glass polished brass materials sphere:

frame:

or powder coated aluminum

or nickel plated steel

hardware: polished brass

or powder coated aluminium

wire: nylon/polyester

weight 10 lb / 4,5 kg

light bulb LED (included), 4,5W

(see lightbulb section for specifications)

sockets

voltage 120V / 240V

dimmer refer to our recommended list of dimmer models

certifications

**№** (€⊕


notes – must be installed by an electrician

- additional charges for modifications or for special


– lead time between 7-9 weeks.

- dimensions are approximate and may vary slightly.


#### parallel wires

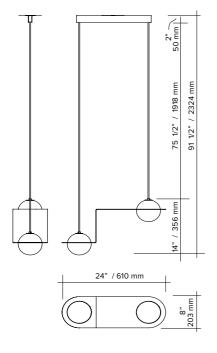

#### parallel wires with offset connection




#### angled wires




## lambert&fils

## **ORDER GUIDE: SKU**

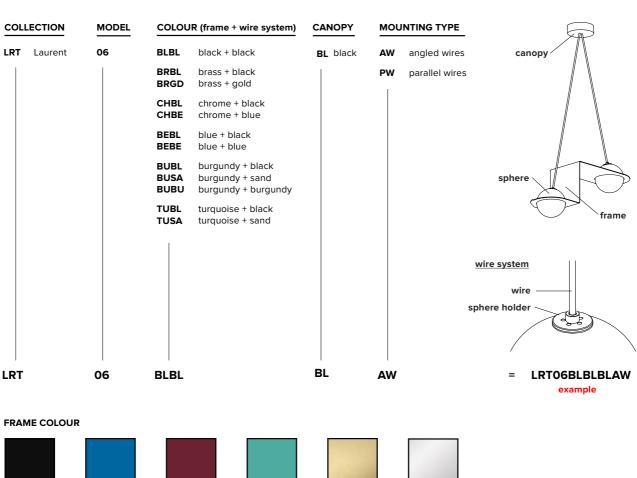





# lambert&fils

### LIGHT BULB & DIMMER SPECIFICATIONS

### **G9 SOCKETS**



Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty





#### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V**

The dimming technology offering the best results is ELV (electronic  $\ \ \,$ low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

## **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V**

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

<sup>\*</sup>Other dimmers can yield good results and we recommend conducting your own test before final installation.