








PARC 01

Parc is a collection inspired by childhood imagination and the essentiality of homemade forms — created in collaboration with Swiss designer Adrien Rovero. Evoking the archetype of a flashlight, each lamp of the Parc Collection is a playful reminder of time spent in nature, when a simple tube and piece of string could be used to fashion any number of creations. These makeshift things, at once naive and functional, harness the unique beauty of peeling an object back to its essence.


- type:** wall and table
- construction:** hand blown frosted glass
powder coated aluminum body
vinyl cord
- specifications:** source: LED lamp provided (G9 base)
power consumption: 4,5W
lumen output: 319lm
colour temperature: 2700K included
*3000K available upon request
colour rendering index: 80 CRI standard
* ≥ 90 CRI upon request
expected lifetime: 25 000h
- control:** refer to our recommended list of dimmer models
- cord length:** 96" / 244 cm, hand switch at 18"/46 cm from lamp
144" / 366 cm, foot switch at 72"/183 cm from lamp
- weight:** 2.2lb / 1kg
- certifications:**     IP20
- warranty:** 2 years

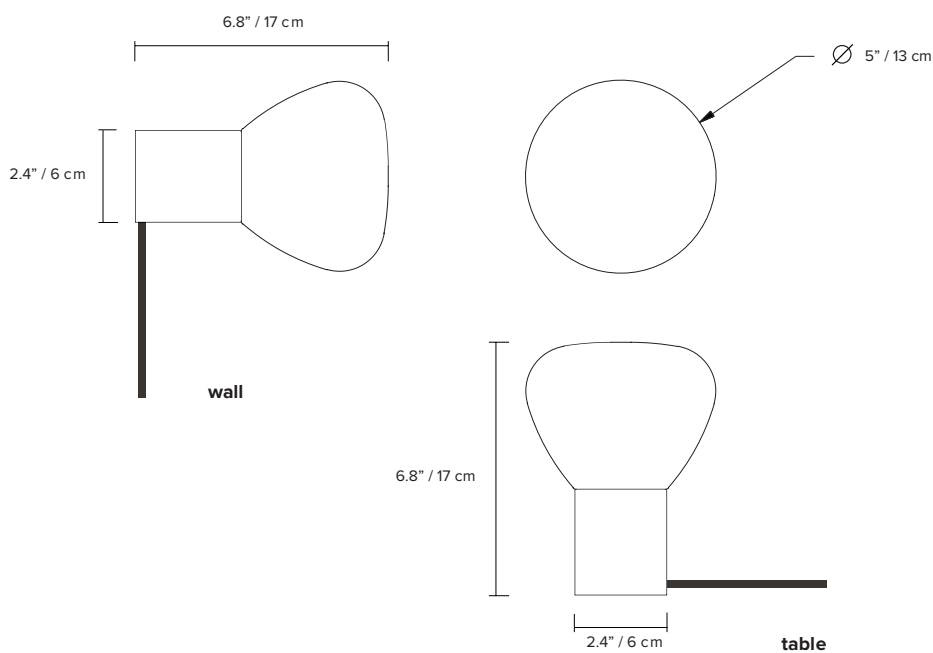


*dimensions are approximate and may vary slightly

ORDER GUIDE: SKU

COLLECTION	MODEL	BODY	CORD*	SWITCH	
PRC parc	01	BK black	BK black	HD hand	
		MB midnight blue	WH white	FT floor	
		BE blue			
		WH white			
		BG beige			
		BU burgundy			
		GN green			
		TC terracotta			
PRC	01	BK	BK	HD	= PRC01BKBKHD example

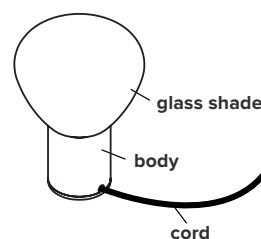

FINISH (*polyester cords also available in all colours upon request, except terracotta)

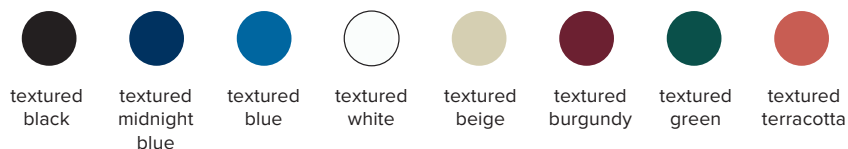

* cords only available in black or white in Australia

NOTES:

- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

DIMMER SPECIFICATIONS

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.



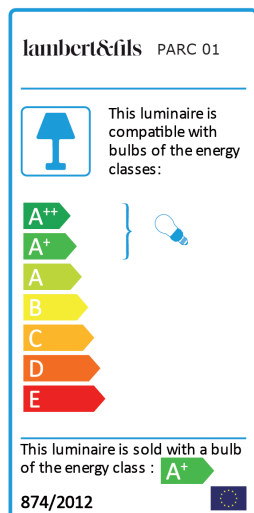

EU ENERGY LABEL







PARC 06

Parc is a collection inspired by childhood imagination and the essentiality of homemade forms — created in collaboration with Swiss designer Adrien Rovero. Evoking the archetype of a flashlight, each lamp of the Parc Collection is a playful reminder of time spent in nature, when a simple tube and piece of string could be used to fashion any number of creations. These makeshift things, at once naive and functional, harness the unique beauty of peeling an object back to its essence.


- type:** table
- construction:** hand blown frosted glass
powder coated aluminum body
vinyl cord
- specifications:** source: LED lamp provided (G9 base)
power consumption: 3x 4,5W
lumen output: 951lm
colour temperature: 2700K included
*3000K available upon request
colour rendering index: 80 CRI standard
* ≥ 90 CRI upon request
expected lifetime: 25 000h
- control:** refer to our recommended list of dimmer models
- cord length:** 96" / 244 cm, hand switch at 18" / 46 cm from lamp
132" / 335 cm, foot switch at 60" / 152 cm from lamp
- weight:** 7.5lb / 3.4kg
- certifications:**     IP20
- warranty:** 2 years

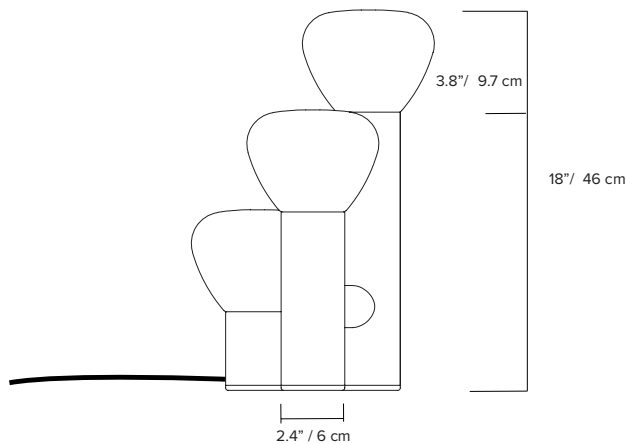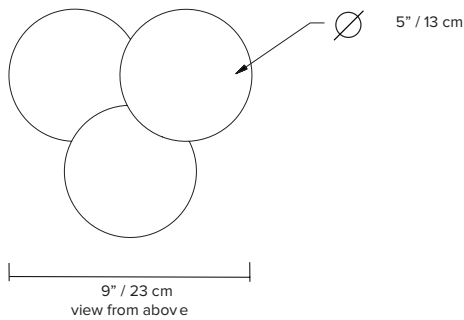

*dimensions are approximate and may vary slightly


ORDER GUIDE: SKU

COLLECTION	MODEL	BODY	CORD	SWITCH
PRC parc	06	BK black	BK black	HD hand
		MB midnight blue	WH white	FT floor
		BE blue		
		WH white		
		BG beige		
		BU burgundy		
		GN green		
		TC terracotta		
PRC	06	BK	BK	HD = PRC06BKBKHD

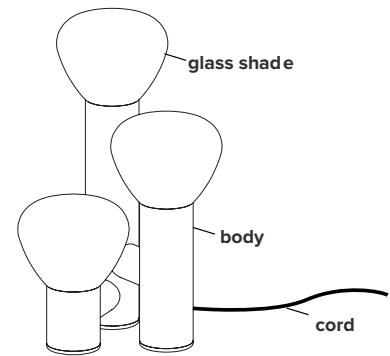

example

FINISH (*polyester cords also available in all colours upon request, except terracotta)

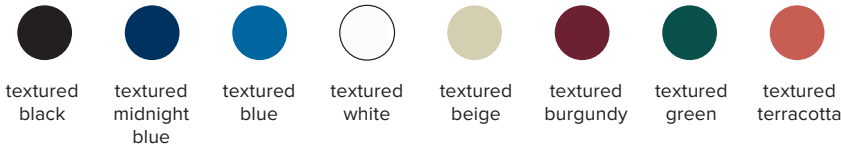

* cords only available in black or white in Australia

NOTES:

- must be installed by an electrician
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

DIMMER SPECIFICATIONS

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.



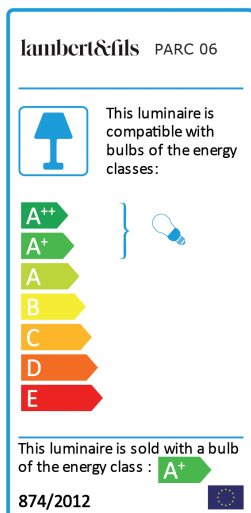

EU ENERGY LABEL






PARC 05

Parc is a collection inspired by childhood imagination and the essentiality of homemade forms — created in collaboration with Swiss designer Adrien Rovero. Evoking the archetype of a flashlight, each lamp of the Parc Collection is a playful reminder of time spent in nature, when a simple tube and piece of string could be used to fashion any number of creations. These makeshift things, at once naive and functional, harness the unique beauty of peeling an object back to its essence.


type:	floor
construction:	hand blown frosted glass powder coated aluminum body vinyl cord
specifications:	source: LED lamp provided (G9 base) power consumption: 3x 4,5W lumen output: 957lm colour temperature: 2700K included *3000K available upon request colour rendering index: 80 CRI standard * ≥ 90 CRI upon request expected lifetime: 25 000h
control:	refer to our recommended list of dimmer models
cord length:	132" / 335 cm foot switch at 60" / 152 cm from lamp
weight:	27.1lb / 12.3kg
certifications:	    IP20
warranty:	2 years

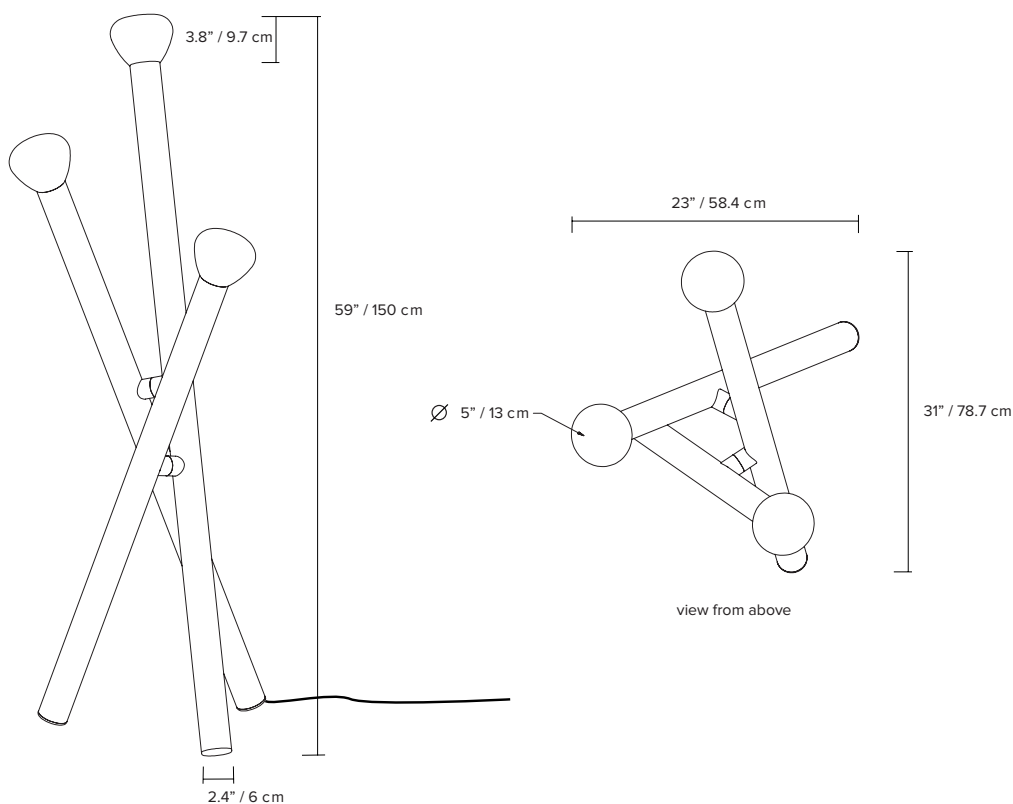


*dimensions are approximate and may vary slightly

ORDER GUIDE: SKU

COLLECTION	MODEL	BODY	CORD
PRC parc	05	BK black	BK black
		MB midnight blue	WH white
		BE blue	
		WH white	
		BG beige	
		BU burgundy	
		GN green	
		TC terracotta	
PRC	05	BK	BK = PRC05BKBK example

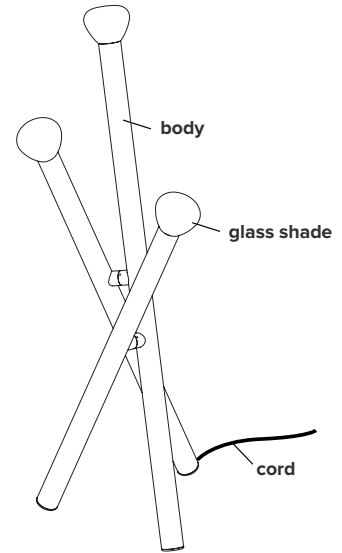

FINISH (*polyester cords also available in all colours upon request, except terracotta)

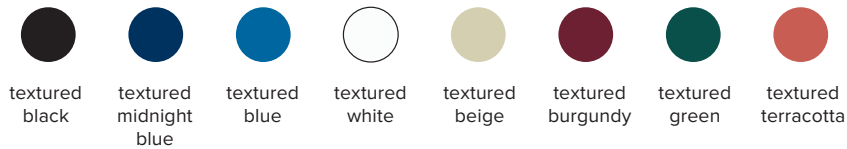

* cords only available in black or white in Australia

NOTES:

- must be installed by an electrician
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

DIMMER SPECIFICATIONS

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL

