









## DORVAL 01

Based on SCMP DESIGN OFFICE's original pendant prototype Dorval 01, this collection is layered in history, a subtle interplay between contemporary and vintage industrial design. Drawing equal inspiration from airport runway lights and the classic Motobecane french moped, the result is a light both confrontational and intriguing—one which poses an immediate invitation to play.

- type:** pendant
- construction:** polished aluminium body, head and canopy  
clear prismatic PMMA lens  
polyester cord, steel cord for aluminium finish
- specifications:** source: LED array, integrated  
power consumption: 36W  
color temperature: 3000K  
2700K  
dim to warm 3000k to 2200k  
dim to warm 2700k to 2200k  
lumen output: 3000K - 3106 lm  
2700K - 2888 lm  
colour rendering index: ≥90 CRI  
colour consistency: 3 SDCM  
expected lifetime: ≥50 000h
- control:** 120/277V on/off, 0-10V or phase dimming (120V only)  
220-240V on/off or trailing edge dimming only  
refer to our recommended list of dimmer models
- cord length:** 108" / 275cm
- weight:** 11.5lb / 5.2kg
- certifications:**    
- warranty:** 2 years

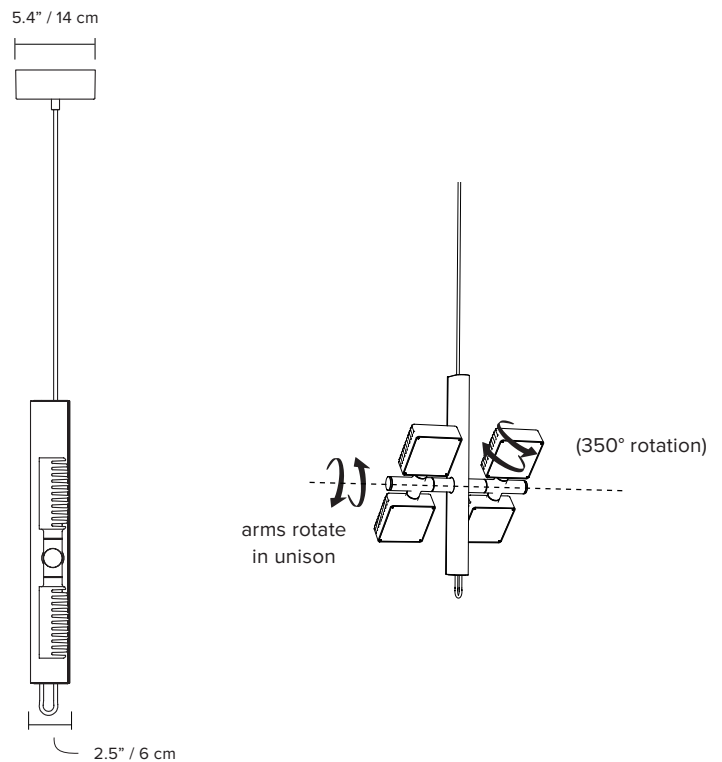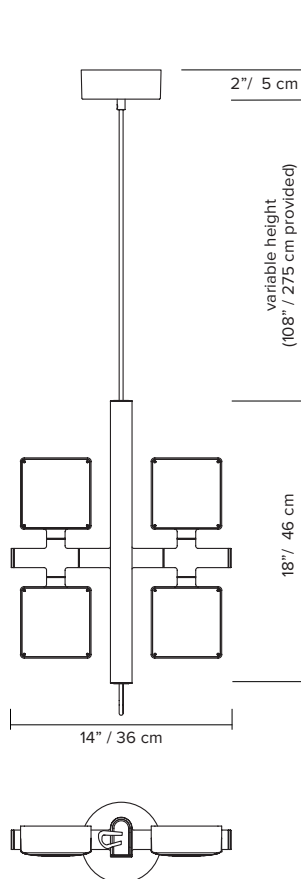

\*dimensions are approximate and may vary slightly

## ORDER GUIDE: SKU

COLLECTION	MODEL	BODY, CORD AND LOOP	CANOPY	COLOUR TEMPERATURE (CCT)	DIMMING
<b>DOR</b>   dorval	<b>01</b>	<b>BK</b>   black	<b>BK</b>   black	<b>WL</b>   warm light (2700K)	<b>ZT</b>   0-10V dimming
		<b>WH</b>   white	<b>WH</b>   white	<b>NL</b>   neutral light (3000K)	<b>PH</b>   phase dimming
		<b>MB</b>   midnight blue	<b>MB</b>   midnight blue	<b>D27</b>   dim to warm (2700K-2200K)	
		<b>LB</b>   light blue	<b>LB</b>   light blue	<b>D30</b>   dim to warm (3000K-2200K)	
		<b>BG</b>   beige	<b>BG</b>   beige	<b>CCT</b>   other CCT available upon request *	
		<b>AL</b>   aluminium	<b>AL</b>   aluminium		
<b>DOR</b>	<b>01</b>	<b>BK</b>	<b>BK</b>	<b>WL</b>	<b>ZT = DOR01BK BKWLZT</b> <b>example</b>


### FINISH



### NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- offset available upon request
- not to be suspended by a hook
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on our website for cleaning instructions

\* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

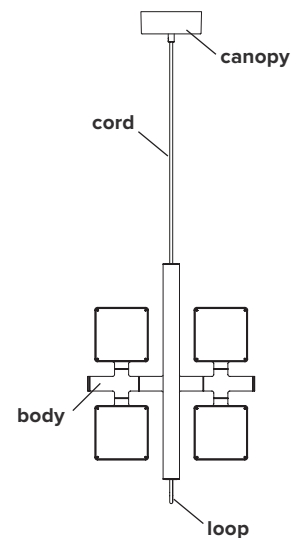

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Lutron	TGCL-153P	Phase dimming	14%	98%
Leviton	VPE06	Phase dimming	14%	98%
Lutron	DVELV303P	Phase dimming	11%	98%
Lutron	SELV300P	Phase dimming	11%	98%
Lightolier	ZP260QEW	Phase dimming	11%	98%
Lutron	FAELV500	Phase dimming	17%	99%
Lutron	MAELV600	Phase dimming	18%	98%

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase dimming (trailing edge only\*\*)


Dimmer brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	31%	100%
Clipsal	32E450TM	Phase dimming	25%	100%

Some dimmers require a minimum load, check specifications.

\*Other dimmers can yield good results and we recommend conducting your own test before final installation

\*\*Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

## EU ENERGY LABEL

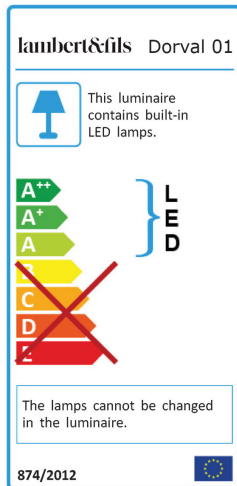










## DORVAL ATELIER 01

The Dorval Atelier looks like it was dipped in a pool of metallic liquid, making it an utterly refined, almost magical version of the impressively technical original model. Entirely made of brass, the Dorval Atelier stuns by stripping down and glorifying the process of making such a piece. Brass is a lively material which morphs with time, and ages elegantly. This model aims to be an ode to our most-used material, juxtaposed here on one of our most contemporary models.

Dorval Collection is a collaboration with SCMP Design Office.

- type:** pendant
- construction:** brass body, head, canopy and cord  
clear prismatic PMMA lens
- specifications:** source: LED array, integrated  
power consumption: 36W  
color temperature: 3000K  
2700K  
dim to warm 3000k to 2200k  
dim to warm 2700k to 2200k  
lumen output: 3000K - 3106 lm  
2700K - 2888 lm  
colour rendering index:  $\geq 90$  CRI  
colour consistency: 3 SDCM  
expected lifetime:  $\geq 50\ 000$ h
- control:** 120/277V on/off, 0-10V or phase dimming (120V only)  
220-240V on/off or trailing edge dimming only  
refer to our recommended list of dimmer models
- cord length:** 108" / 275cm
- weight:** 35lb / 16kg  
\*mounting surface must be able to support 200lbs / 91kgs
- certifications:**     IP20
- warranty:** 2 years

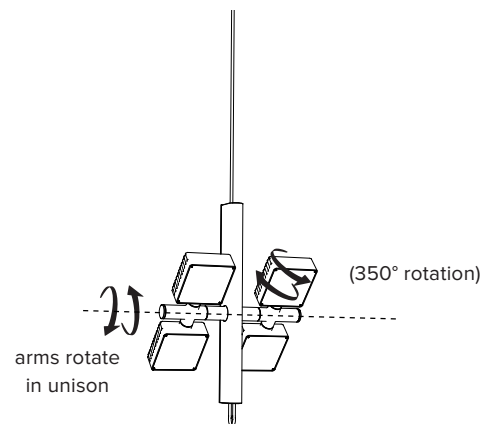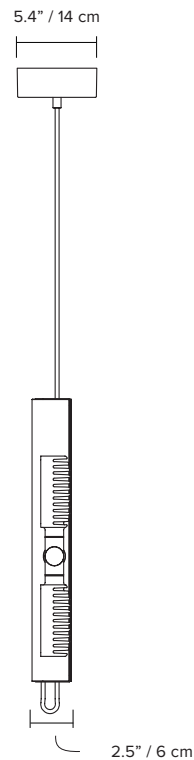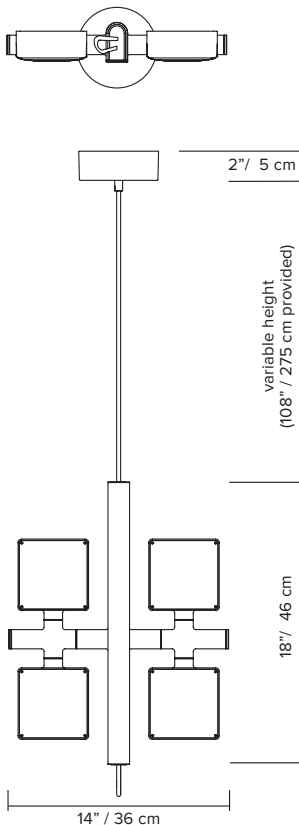

\*dimensions are approximate and may vary slightly

## ORDER GUIDE: SKU

COLLECTION	MODEL	FINISH	COLOUR TEMPERATURE (CCT)	DIMMING
DOR dorval	51	BR brass	WL warm light (2700K)	ZT 0-10V dimming
			NL neutral light (3000K)	PH phase dimming
			D27 dim to warm (2700K-2200K)	
			D30 dim to warm (3000K-2200K)	
			CCT other CCT available upon request *	
DOR	51	BR	WL	ZT = <b>DOR51BRWLZT</b> <b>example</b>

### FINISH




brass

### NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not to be suspended by a hook
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on our website for cleaning instructions

\* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

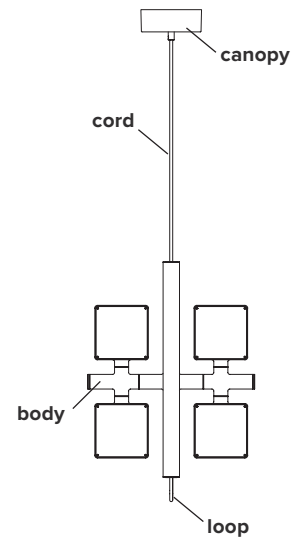

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Lutron	TGCL-153P	Phase dimming	14%	98%
Leviton	VPE06	Phase dimming	14%	98%
Lutron	DVELV303P	Phase dimming	11%	98%
Lutron	SELV300P	Phase dimming	11%	98%
Lightolier	ZP260QEW	Phase dimming	11%	98%
Lutron	FAELV500	Phase dimming	17%	99%
Lutron	MAELV600	Phase dimming	18%	98%

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase dimming (trailing edge only\*\*)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	31%	100%
Clipsal	32E450TM	Phase dimming	25%	100%

Some dimmers require a minimum load, check specifications.

\*Other dimmers can yield good results and we recommend conducting your own test before final installation

\*\*Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

## EU ENERGY LABEL

