lambert&fils

LAURENT 09



type suspension

handblown opaline glass sphere: materials

polished brass frame:

or powder coated aluminum

or nickel plated steel

hardware: polished brass

or powder coated aluminium

wire: nylon/polyester

weight 9 lb / 4 kg

light bulb

LED (included), 4,5W (see lightbulb section for specifications)

sockets

120V / 240V voltage

refer to our recommended list of dimmer models dimmer


® (€⊕ certifications

notes - must be installed by an electrician

- additional charges for modifications or for special


- lead time between 7-9 weeks.

- dimensions are approximate and may vary slightly.

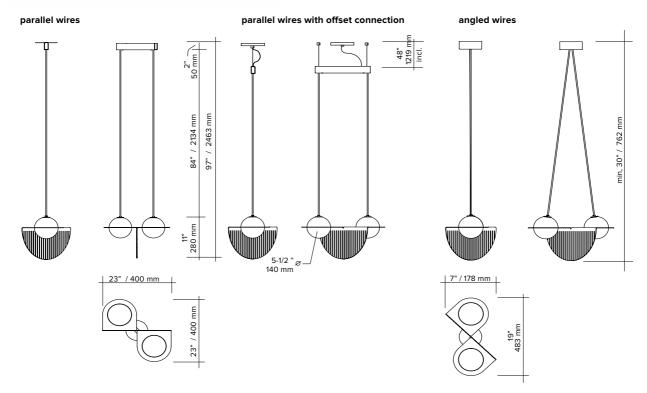


lambert&fils

ORDER GUIDE: SKU

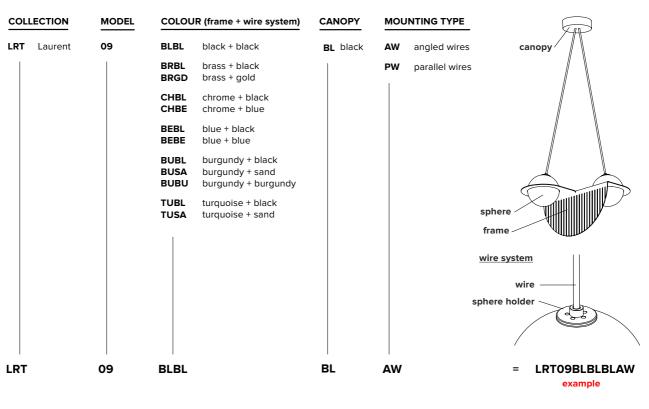

FRAME COLOUR





lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty





DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic $\ \ \,$ low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.